



Original article

The application of the numeral method of lines on carbon dioxide captures process: Modelling and simulation

Makhanana Innocent Nkhwashu^{*}, Mapula Lucey Moropeng, Oluranti Agboola, Andrei Kolesnikov, Avhafunani Mavhungu

Department of Chemical, Metallurgy and Materials Engineering, Tshwane University of Technology, Pretoria, South Africa

ARTICLE INFO

Article history:

Received 5 October 2017

Accepted 29 January 2018

Available online xxxx

Keywords:

Carbon dioxide capture process

Post-combustion process

Modelling

Simulation

Numerical method of lines

ABSTRACT

CCP is the process of capturing and storing CO₂ away from the atmosphere. Out of the three available methods of capturing CO₂, this study focused on Post-combustion process. The Mass balance equations of the flue gas was modelled as a PDE and then reduced to an ODE by the application of Numerical Method of Lines. The equation was discretized to 0.8 m. Mono-ethanolamine, Potassium Carbonate and Chilled Ammonia were studied to investigate their absorption capacity to capture CO₂. Two specific mass transfer area correlations were used in order to validate the results. The results followed the same trends with minimal error of less than 21%. Discretization of 1 m was done for the absorbent which captured the highest amount of CO₂ in order to further validate the results. The results corresponded well with each other. MEA has proven to be the best absorbent in capturing Carbon dioxide than the other two absorbents.

© 2018 The Authors. Production and hosting by Elsevier B.V. on behalf of King Saud University. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

The Numerical Method of Lines (NMOL) is regarded as a special finite difference method but more effective with respect to accuracy and computational time than the regular finite difference method (Sadiku, 2000). It is basically the discretization of independent variables except for one on a partial differential equation (Alabdali and Bakodah, 2014). It is a general way of perceiving PDEs as ODEs (Ordinary differential equation). Our physical world is most generally described in scientific and engineering terms with respect to three-dimensional space and time which we abbreviate as space-time. PDEs provide a mathematical description of physical space-time, and they are therefore among the most widely used forms of mathematics (Hamdi et al., 2009). Application of Numerical method of lines is applied on Carbon dioxide capture process (CCP) which is the process of capturing and storing carbon

dioxide away from the atmosphere. Carbon dioxide is removed after or before combustion of flue gas (Kothandaraman, 2010). There are three main processes of capturing carbon dioxide. Carbon dioxide can be captured by post combustion process, oxy-fuel combustion and pre-combustion process. Post-combustion capture process is the most preferred process out of the three (Kothandaraman, 2010). It is the most potentially, technically and economically mature carbon dioxide capture technology used to capture CO₂ from the flue gases produced by the power generation sector (Gáspár and Cormos, 2012). The current state-of-the-art technology for the post combustion capture process is the chemical absorption. It involves carbon dioxide being diffused into the solvent absorbent. Post-combustion technologies available for CO₂ removal include membranes, adsorption, chemical absorption, physical absorption and cryogenic processes. Some of these technologies are well established and are being used commercially, while some are being improved or need additional improvements for feasibility (Devries, 2014). In post combustion process, Fossil Fuel is burned with air to produce a flue gas containing water (H₂O), Oxygen (O₂), Nitrogen (N₂), Nitrogen oxide (NO₂), Sulfur dioxide (SO₂) and Carbon dioxide (CO₂). The flue gas produced is then cooled down and fed into an absorption column where a solvent absorbent is fed at the top of the column (Mohammad et al., 2013). In recent years, there has been increasing demand for a significant reduction of carbon dioxide emissions from industrial sources to decrease the global warming problem (Khan et al., 2011).

^{*} Corresponding author at: 4311 Kliptown Golf Course, Union road, Pimville, Soweto 1809, South Africa.

E-mail address: 211121670@tut4life.ac.za (M.I. Nkhwashu).

Peer review under responsibility of King Saud University.



Production and hosting by Elsevier

Nomenclature

M	mass (kg)	v	volume of the column (m^3)
\dot{M}	mass flow rate (kg/s)	N_i	the molar flux ($kmol/m^2.s$)
ρ	density (kg/m^3)	a_i	mass transfer area (m^2/m^3)
V	Volume (m^3)	K_i	mass transfer coefficient
F	Volume flow rate (m^3/s)	$C_i, C_i^{v,int}$	concentration of component i ($kmol/m^3$)
U	Velocity (m/s)	D_{AB}	molecular diffusivity (m^2/s)
Z	Column height (m)	ϵ_m	mass Eddy diffusivity (m^2/s)
n	number of moles (moles)	Re_L	Reynolds number for the liquid phase
\dot{n}	molar flow rate (moles/s)	A_p	specific packing area (m^2/m^3)
Mr	molar weight (kg/kmol)		
A	is the surface area (m^2)		

In South Africa, there is no legislation Monoethanolamine (MEA) is one of the popular amines used in carbon dioxide capture process (Fernandez, 2013). Other absorbents have lately surfaced and are the focus areas since they are developing. These absorbents include chilled ammonia, Di-ethanolamine (DEA), N-methyl-diethanolamine (MDEA), 2-amino-2-methyl-1-propanol (AMP) and potassium carbonate (K_2CO_3) and pure water. The most mature and commercially applied amine is Monoethanolamine (MEA) due to its high absorptive capacity. Effective methods have to be put in place to ensure that the emission of Carbon dioxide is reduced. This will have to happen by understanding the performance of the process. This process covers the mass transfer of carbon dioxide from the bulk gas to the solvent absorbent solution. An important characteristic of reactive absorption process is the variation of reaction velocities, from very low to high instantaneous reactions (Peng et al., 2002). Following the numerical analysis of the Carbon dioxide capture process, the flue gas volume flow was regarded as an influential element. Volume flow equation was developed in a form of a 2D model for the flue gas volume. A mathematical technique, NMOL was applied to the developed flue gas volume flow PDE. The approach yielded a better understanding on the performance of the process when focusing on the volume flow. For better understanding, three absorbents MEA, K_2CO_3 and Chilled ammonia were investigated, and the most efficient absorbent was identified when focusing on the behaviour of the flue gas volume flow only. The equations were validated by simulating Python computer coding software. The output was compared to the previous studies done on NMOL. The model better explains the behaviour of the flue gas volume flow rate. Its purpose is to mimic the carbon dioxide flue gas volume flow. So many models that are based on the concentration and temperature distribution of the flue gas and solvent absorbent have been studied. There is still a need for volume flow distribution of the flue gas.

2. Modelling

2.1. Modelling assumptions

Fig. 1 shows the schematic diagram of the absorption column. The flue gas obtained from the combustion of coal enters at the bottom of the column and the solvent absorbent coming from the recycle stream enters from the top of the column. The Carbon dioxide free flue gas exit from the top of the column and the Carbon dioxide rich solvent exit from the bottom of the column.

The volume flow equations of the liquid and gas phase are modelled by applying conservation of mass. The following assumptions have been made:

- Density and viscosity of the liquid and gas are assumed to be constant.

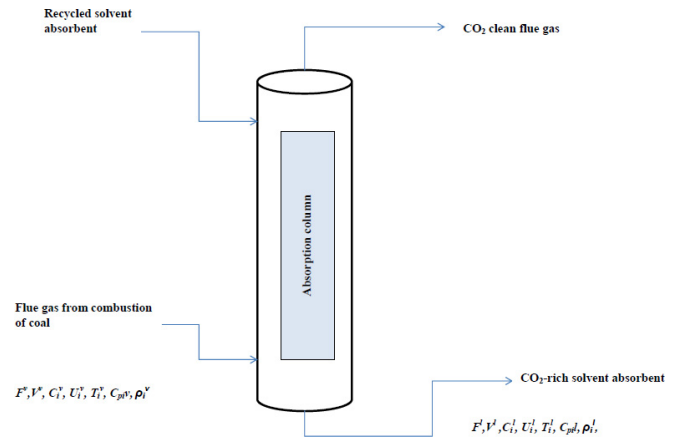


Fig. 1. Schematic diagram of the absorption column.

- The flow equations will be modelled at constant column temperature of the flue gas but it can be manipulated to suit the process.
- The flow rate changes with column height at various process times.
- Constant velocity is assumed.
- Evaporation of solvents is negligible since the focus is on the flue gas volume flow.

2.2. Mathematical models description

2.2.1. Mass balance equation

Below is the steady state mass balance equation.

$$\frac{dM}{dt} = \dot{M}_{in} - \dot{M}_{out} - \dot{M}_{mass_transfer} \quad (1)$$

M_{in} in the gas phase equation is the initial mass content of the flue gas produced after the combustion of fossil fuel

$$M = \rho V \dot{M} = \rho F \quad (2)$$

M_{in} in the gas phase equation is the initial mass content of the flue gas produced after the combustion of fossil fuel.

$$\frac{d(V\rho)}{dt} = \rho \dot{F}_{in} - \rho \dot{F}_{out} - \rho F_{mass_transfer} \quad (3)$$

$$\rho \frac{d(V)}{dt} + V \frac{d\rho}{dt} = \rho \dot{F}_{in} - \rho \dot{F}_{out} - \rho F_{mass_transfer} \quad (4)$$

ρ is the density, V is the volume of the flue gas and F is the volume flow rate. Density is constant therefore Eq. (4) becomes;

$$\frac{dV}{dt} = \dot{F}_{in} - \dot{F}_{out} - F_{mass_transfer} \quad (5)$$

The change in volume across the column is given by:

$$F_{in} - F_{out} = -U \frac{dV}{dZ} \quad (6)$$

U is the velocity and Z is the column height. In order for the absorption to occur, mass transfer and chemical reaction should occur. The following equations are necessary to satisfy the mass transfer process written as follows:

$$F_{mass_transfer} = \frac{\dot{M}_{mass_transfer}}{\rho} \quad (7)$$

\dot{M} is the mass flow rate, \dot{n} is the molar flow rate and Mr is the molecular weight. The Mole flow rate can be expressed by Eq. (8):

$$\dot{n} = A \times N_i \quad (8)$$

Where A is the surface area of the column and is given as follows:

$$A = a_e v \quad (9)$$

$$\dot{M}_{mass_transfer} = a_e v \times N_i Mr \quad (10)$$

v is the volume of the column. N_i is the molar flux and a_e is the mass transfer area. The volume of the column can be expressed by:

Eq. (10) is substituted into Eqs. (7) and (11) is formed,

$$F_{mass_transfer} = \frac{a_e A.z.N_i.Mr}{\rho} \quad (11)$$

Eq. (11) is substituted into Eq. (5):

$$\frac{dV}{dt} = U \frac{dV}{dZ} + \frac{a_e A.z.N_i.Mr}{\rho} \quad (12a)$$

Eq. 12 is a partial differential equation for the Flue gas flow rate.

$$\frac{\partial V^v}{\partial t} = U^v \frac{\partial V^v}{\partial z} + \frac{a_e A.z.N_i.Mr}{\rho} \quad (12b)$$

2.2.2. Mass transfer equation

The molar flux N_i is modelled according to the two film theory. The molar flux across the mass transfer area is expressed by the following equation:

$$N_i = K_i (C^v - C_i^{v,int}) \quad (13)$$

where K_i is the mass transfer coefficient, C_i is the concentration of component i in gas phase and $C_i^{v,int}$ is the concentration of component i at the interface (Gáspár and Cormos, 2012). The concentration of the carbon dioxide at the interface is approximately zero and because the amine is in excess relative to the gas transfer (Welty et al., 2007) (Geankoplis, 1993).

$$K_i = \frac{D_{AB} + \varepsilon_m}{\Delta Z} \quad (14)$$

D_{AB} is the molecular diffusivity, ε_m is the mass Eddy diffusivity. The molecular diffusivity for a gas-liquid system is expressed by (Geankoplis, 1993):

$$D_{AB} = (1.173 \times 10^{-16})(Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}} \right) (T) \quad (15)$$

Ap is an association parameter, Va is the Carbon dioxide molar volume. T is the temperature of the solvent.

Eq. (13) becomes;

$$N_i = (1.173 \times 10^{-16})(Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}} \right) (T)(C^v - C_{int}^v) \quad (16)$$

2.2.3. Mass transfer area correlation

The mass transfer area developed by De Brito et al. has been used for this research. The correlation was used in a study by (Gáspár and Cormos, 2012) on Dynamic modelling and absorption capacity assessment of CO₂ capture process. The liquid-phase analysis was assumed to be more trustworthy and was exclusively used. Gas-side resistance was neglected in the calculations. An empirical relation was developed from the results (Tsai, 2010).

$$a_e = 0.465 Re_L^{0.3} A_p = 0.465 \left(\frac{\rho_L U_L}{\mu_L} \right)^{0.3} A_p \quad (17)$$

Re_L is the Reynolds number for the liquid phase, A_p is the specific packing area. Since the modelling is based on Numerical method of line, the packing area will be replaced by the segment area. Eq. (20) will become:

$$a_e = 0.465 Re_L^{0.3} = 0.465 \left(\frac{\rho_L U_L}{\mu_L} \right)^{0.3} A_p \quad (18)$$

The derived PDE represent the dynamic behaviour of the flue gas volume flow. Eq. (21) is the developed partial differential equation for the volume flow of the flue gas.

$$\frac{\partial V^v}{\partial t} = -U^v \frac{\partial V^v}{\partial z} - \frac{\left(0.465 \left(\frac{\rho_L U_L}{\mu_L} \right)^{0.3} A_p \right) (A.z.Mr_L)}{\rho_v} (1.173 \times 10^{-16})(Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}} \right) (C^v - C_{int}^v) \quad (19)$$

2.2.4. Application of NMOL to the derived PDE model

The numerical method of lines (NMOL) was used to solve the PDE of the volume flow rate. The column height of 4 m was discretized to 0.8 m segments. This was to minimize error in the results. Discretization of dynamic partial differential equations in Carbon dioxide capture process has not been studied. NMOL is another way of perceiving the PDE as an ODE because one dependent variable is kept constant and the other one dependent. Volume profiling was done at each segment of the column to yield the following series of equations with the aid of a Spyder console embedded within the python software.

$$\frac{dV_{in}^v}{dt} = -U^v \frac{V_{in}^v - V_{in-1}^v}{\Delta z_s} - \frac{\left(0.465 \left(\frac{\rho_L U_L}{\mu_L} \right)^{0.3} A_p \right) (A.z.Mr_L)}{\rho_v} \times (1.173 \times 10^{-16}) \times (Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}} \right) (C^v - C_{int}^v) \quad (20)$$

Δz_s is the segment length of 0.8 m. When the NMOL is applied on Eqs. (19) and (20) is formed. The column will have 5 segments with a length of 0.8 m. $t = (0, 100)$.

Segment 1 where $Z = 0-0.8$ m

$$\frac{dV_{i_1}^v}{dt} = -U^v \frac{V_{i_1}^v - V_{i_{feed}}^v}{\Delta z_s} - \frac{\left(0.465 \left(\frac{\rho_L U_L}{\mu_L} \right)^{0.3} A_p \right) (A.z.Mr_L)}{\rho_v} \times (1.173 \times 10^{-16}) \times (Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}} \right) (C^v - C_{int}^v) \quad (21)$$

Segment 2 where $Z = 0.8\text{--}1.6\text{ m}$

$$\frac{dV_{i_2}^v}{dt} = -U^v \frac{V_{i_2}^v - V_{i_1}^v}{\Delta z_s} - \frac{\left(0.465 \left(\frac{\rho_L D_{uL}}{\mu_L}\right)^{0.3} A_p\right) \cdot (A.z.Mr_L)}{\rho_v} \times (1.173 \times 10^{-16})(Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}}\right) (C^v - C_{int}^v) \quad (22)$$

Segment 2 where $Z = 1.6\text{--}2.4\text{ m}$

$$\frac{dV_{i_3}^v}{dt} = -U^v \frac{V_{i_3}^v - V_{i_2}^v}{\Delta z_s} - \frac{\left(0.465 \left(\frac{\rho_L D_{uL}}{\mu_L}\right)^{0.3} A_p\right) \cdot (A.z.Mr_L)}{\rho_v} \times (1.173 \times 10^{-16})(Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}}\right) (C^v - C_{int}^v) \quad (23)$$

Segment 2 where $Z = 2.4\text{--}3.2\text{ m}$

$$\frac{dV_{i_4}^v}{dt} = -U^v \frac{V_{i_4}^v - V_{i_3}^v}{\Delta z_s} - \frac{\left(0.465 \left(\frac{\rho_L D_{uL}}{\mu_L}\right)^{0.3} A_p\right) \cdot (A.z.Mr_L)}{\rho_v} \times (1.173 \times 10^{-16})(Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}}\right) (C^v - C_{int}^v) \quad (24)$$

Segment 2 where $Z = 3.2\text{--}4\text{ m}$

$$\frac{dV_{i_5}^v}{dt} = -U^v \frac{V_{i_5}^v - V_{i_4}^v}{\Delta z_s} - \frac{\left(0.465 \left(\frac{\rho_L D_{uL}}{\mu_L}\right)^{0.3} A_p\right) \cdot (A.z.Mr_L)}{\rho_v} \times (1.173 \times 10^{-16})(Ap)(M_{r_{solvent}})^{0.5} \left(\frac{1}{(\mu_{solvent})(Va)^{0.6}}\right) (C^v - C_{int}^v) \quad (25)$$

2.2.5. Validation of the model

The model was validated by applying another mass transfer correlation by Dragan. De Brito and Dragan's correlation for effective mass transfer area is similar because they are both Reynolds number dependant equations (Tsai, 2010). The specific packing area is replaced by segment area since the NMOL is applied and it the difference between the authors equations. Eq. (28) below denotes Dragan (Geankoplis, 1993).

$$a_c = 0.1245 Re_L^{0.4} = 0.1245 \left(\frac{\rho_L u_L}{\mu_L}\right)^{0.4} A_p \quad (26)$$

The results were validated by discretizing the column height to 1 m segments for the system that performed better.

2.2.6. Simulation

Python computer coded software was used to simulate the modelled equation. Python is one of the most popular programming languages for scientists and engineers. Python is widely used in industrial scientific computing (Dolgoplov, 2014) hence it was selected as the simulator for the study. Spyder was used as the editor. The flue gas composition is listed in Table 1. It contains 8.4% of the undesired Carbon dioxide. Three absorbents MEA, Potassium Carbonate and Chilled ammonia systems were simulated in order to see how they behave when capturing Carbon dioxide from flue gas. Only the gas phase was modelled and simulated.

The design assumption was based on parameters listed in Table 2. The flue gas composition is after the treatment of other unwanted gases. The parameters were manipulated to best suit the desired results. The pressure is close to Standard Temperature and Pressure (STP).

Table 3 below is the column dimensions. The absorption column is the Mellapak structured design.

Table 1

Composition of the flue gas. Adapted from (Cormos et al., 2010).

Gas constituent (vol%)	Flue gas	Mw (kmol/kg)	Density (kg/m ³)
Nitrogen%	74.13	28.03	1.251
Carbon dioxide%	8.40	44.01	1.98
Water vapour%	4.52	18	1.27
Oxygen%	12.04	32	1.429
Argon%	0.91	39.95	1.784

3. Results and discussion

3.1. Validation of the model

Accuracy in the application of NMOL is proven when the evaluation of the model parameters applied at different segments results to the same graphical trend. This was proven by the work of (Cutlip and Shacham, 1999) where the NMOL was applied to a temperature related problem using Polymath as the simulator. The graphical solution showed that the results of all the segments follow the same trend. In the work of Schiesser, the NMOL was applied to a diffusion equation which showed agreement to the results of (Cutlip and Shacham, 1999). Bidie and Joubert (2008) presented results with 11 curves with the aim of doing an error analysis on NMOL. This is an indication that NMOL results for each segment will start at the same point and will follow the same trend.

3.2. Results

This study is emphasized on the profiling of the flue gas volume flow rate done at each segment of the column. The NMOL procedure was applied and the profile of the volume flow is shown for each discretized segment of the column. Volume flow tests were conducted using the three absorbents i.e. Chilled ammonia, Mono-ethanolamine and Potassium Carbonate at a run time of 100 s. Fig. 2 designates the simulation results with the application of NMOL. The results show that the application of the NMOL to this study is accordingly, as the expected solution of the same graphical trends is attained.

In Fig. 2, the numerical method of lines results for all the three system investigated follow the same trend. The process time is made to be the continuous variable and the column height is made the constant variable. At $t = 0$, there is nothing in the absorption column hence the volume will be 0 m³. The volume of the flue gas increases as time progresses at each discretised section. The volume of the flue gas stabilised when it reached the peak of the segment. The results in Fig. 2 are used to apply a real life situation which is to determine which absorbent performs better. The volume of the flue gas is affected by each absorbent used since the results of the volume were not the same. The feed volume of the flue gas is 1000 m³. With NMOL results, at $t = 0$ there is no flow of gas in the absorption column and the flue gas in the holding is 1000 m³. As shown in Fig. 2, the volume of the flue gas decreases as it flows up the column. The volume decreases for the MEA, Chilled ammonia and Potassium carbonate systems.

Table 2

Design assumptions of the flue gas for the post combustion process.

Flue gas stream	Value	Units
Feed volume	1000	m ³
Temperature	50	°C
Pressure	1.05	Bar

Table 3

Absorption column parameters.

Parameter	Value	Units
Column height	4	m
Column diameter	0.5	m

In this paper, 8.4% CO₂ composition is used to account for the amount of CO₂ available in the feed gas. Which means that, out of the feed gas lost during the process by either absorption or through recycling, 8.4% of it will account for the CO₂ captured considering that the latter absorbents can only capture CO₂ amongst other feed gas constituents because of its acidic nature (Kothandaraman, 2010). To determine the amount of CO₂ absorbed/captured in the process, Eq. (27) is used to calculate the fraction of the flue gas lost after absorption.

$$\% \text{flue gas lost} = \frac{(\text{Feed Volume}_{100 \text{ m}^3}) - (\text{Final flue gas Volume})}{(\text{Feed Volume}_{100 \text{ m}^3})} \times 100\% \quad (27)$$

$$\% \text{CO}_2\text{-absorbed} / \text{Absorption rate} = \frac{(\% \text{flue gas lost})}{(8.4\% \text{ CO}_2 \text{ in the feed})} \times 100\% \quad (28)$$

Eq. (28) is used to calculate the absorption efficiency of the three absorbents. The absorption rate of CO₂ is compared in Fig. 3 for the three absorbents 'system. MEA showed the highest absorption rate compared to Chilled ammonia and potassium Carbonate.

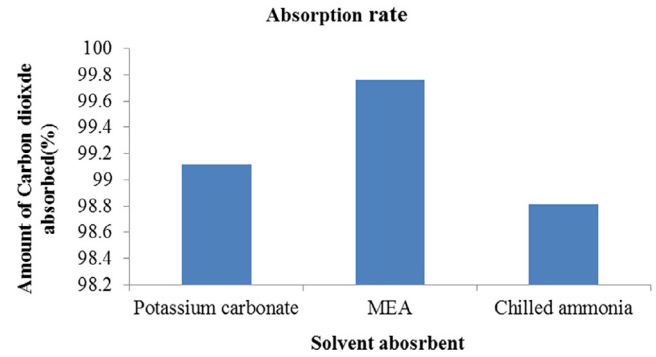


Fig. 3. Absorption rate of Carbon dioxide for the MEA, Potassium Carbonate and Chilled ammonia system.

3.3. Validation of the results

From the work of (Gáspár and Cormos, 2012) the mass transfer area of De Britos et al. was used. MEA proved to have high absorption efficiency though it was compared with other amines. With this work, MEA is compared with other solvents and it has proved to have high absorption efficiency. In the work of (Tsai, 2010), a review was done for the mass transfer area of De Britos et al. and Dragan et al. Since both are Reynolds's number dependant, they make a good comparison. The comparison of the volume results of the flue gas for De Britos and Dragan mass transfer area correlation is shown by Fig. 4. The two correlations plots almost lie on the same curve.

The approximation for the De Britos and Dragan's mass transfer correlation validates the certainty of the model and results. The

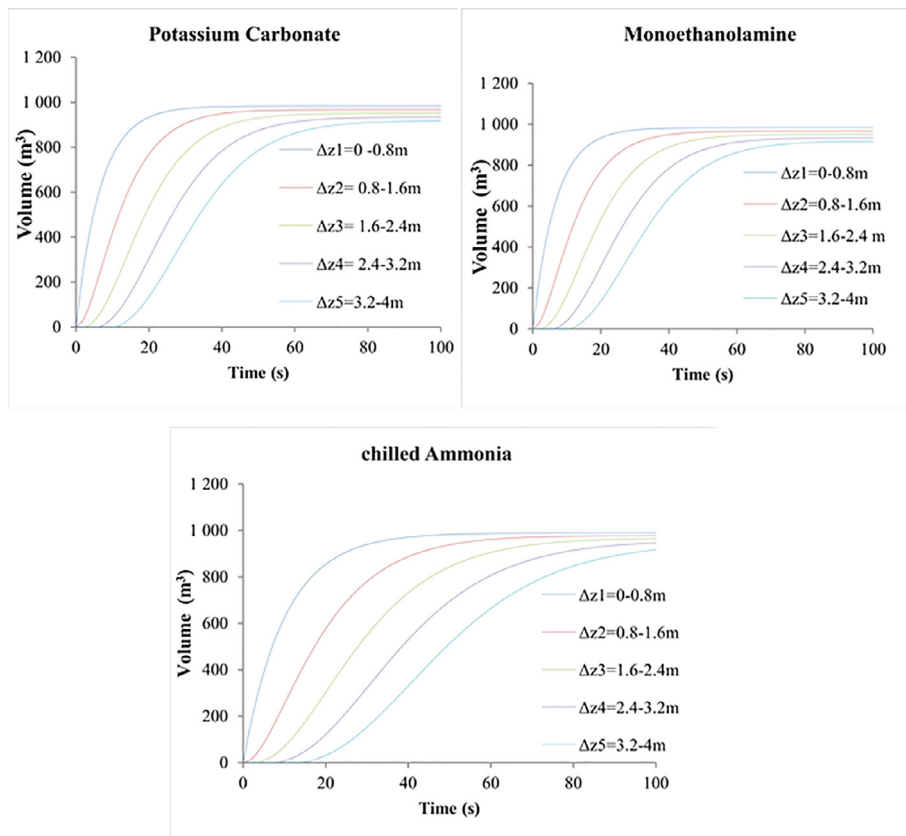


Fig. 2. Numerical method of lines results for the volume of the flue gas flowing across the absorption column.

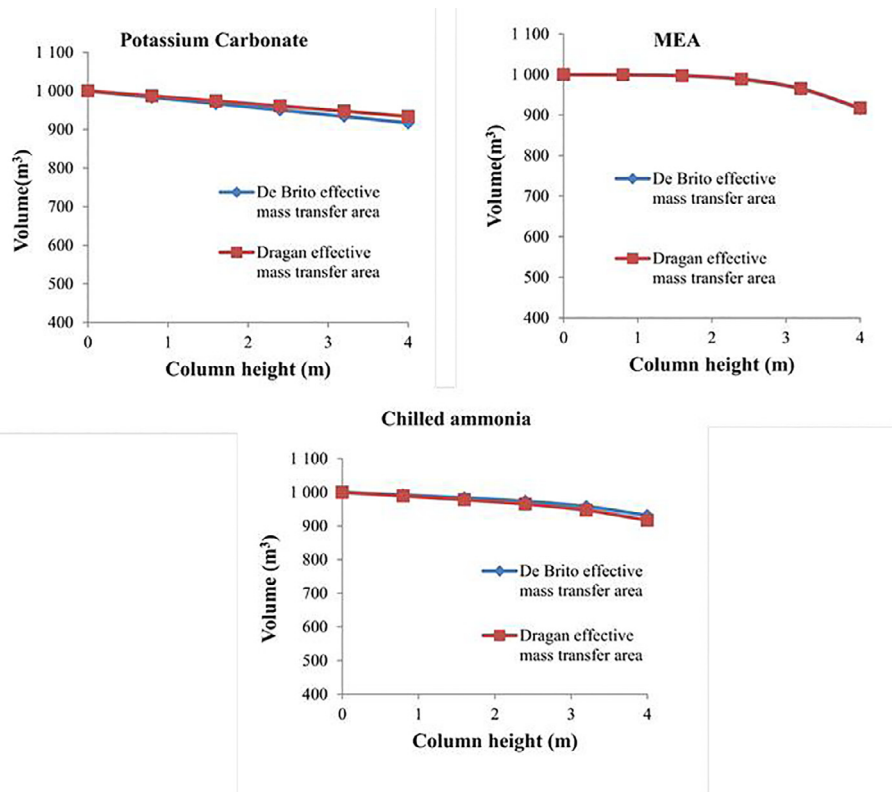


Fig. 4. Validation of the model by using two different mass transfer area correlations, the volume of the flue gas at the peak of each segment of the column.

absorption rate of CO_2 for the two correlations is compared in Fig. 6. Eqs. (27) and (28) are used to calculate the absorption rate. MEA has the highest absorption rate than Potassium Carbonate and Chilled ammonia on both correlations.

Fig. 5 presents the amount of Carbon dioxide absorbed for Dragan and De Britos mass transfer area correlation. De Britos correlation seemed to have yielded the highest amount of Carbon dioxide absorbed with comparison to Dragan's correlation. An error analysis of the two mass transfer correlations is done. The analysis determines the deviation of the two correlations from each other. The results are listed in Table 4. Eq. (29) is used to calculate the % error difference.

$$\% \text{error} = \frac{(\% \text{Absorption rate}_{\text{De Britos}}) - (\% \text{Amount rate}_{\text{Dragan}})}{(\% \text{Absorption rate}_{\text{De Britos}})} \times 100\% \quad (29)$$

As indicated in Table 4, MEA has 1.31% error difference, which is the lowest compared to Potassium Carbonate and Chilled ammonia % error analysis. MEA has been widely studied compared to the other absorbents. The testing of the mass transfer might have been based on MEA study since it is commercially and industrially matured absorbent in CCP. Potassium Carbonate has produced the highest % error. The results are accepted based on the error analysis. Potassium Carbonate results are 79.46% accurate, Chilled Ammonia results are 83.13% and the MEA results are 98.69% accurate.

To validate the NMOL results, another discretization of 1 m segment is done. It is graphically presented in Fig. 6. Cutlip and Shacham (1999) made a validation by discretising using a different

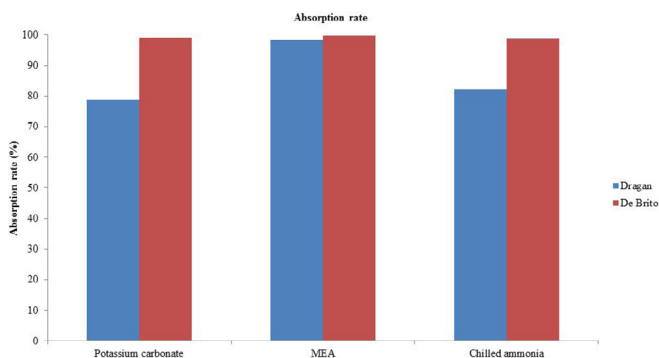


Fig. 5. Comparison of the absorption rate for Dragan and De Britos mass transfer area correlation.

Table 4
Error analysis of the results (%).

Potassium carbonate	MEA	Chilled ammonia
20.54	1.31	16.87

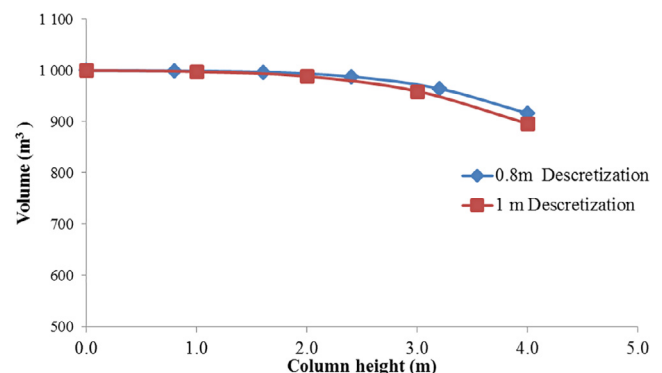


Fig. 6. NMOL validation- 0.8 m segmentation and 1 m segmentation: Peak volume of the flue gas at each segment of the column.

value. The results for 0.8 m discretization and 1 m discretization are comparable with a minimal difference. The results are considered valid.

4. Conclusion

The simulation was conducted to profile the volume of the flue gas for the post-combustion Carbon dioxide absorption process. A 2D Partial differential equation has proven to be the best solution in profiling the volume of the flue gas. The equation has been validated by using two mass transfer area correlations. An error analysis was conducted and the MEA system's results produced an error of 1.31%, followed by Chilled Ammonia with an error of 16.87% and Potassium Carbonate with an error of 20.54%. Based on the error analysis the results and the model are valid. The Numerical method lines used to solve the Partial differential equation is being supported by this study. NMOL is a good way of seeing PDEs as ODEs and that has been proven. Time and space are an important factor in the process. By the application of NMOL, it has allowed time and space dimension to play an important role in the equation. As stated that real life situations are in two dimension or more.

Acknowledgements

I would like to thank the, Faculty of built environment and Engineering, for their academic support and the for tuition fees funding, of the for the helpful discussion on data analysis.

References

- Alabdali, F.M., Bakodah, H.O., 2014. A new modification of the method of lines for first order hyperbolic PDEs. *Appl. Math.* 5, 1457–1462.
- Bidie J.N.M., Joubert S.V., Fay T.H. "Error analysis of the numerical method of lines". Buffelspoort TIME2008 Peer-reviewed Conference Proceedings, 2008.
- Cormos A.M., Gaspar J., Padurean A., Cormos C.C., Agachi S., Techno-economical analysis of carbon dioxide absorption in mono-ethanolamine by mathematical modelling and simulation, 20th European Symposium on Computer Aided Process Engineering – ESCAPE, 2010, 20, pp. 2–5.
- Cutlip, M.B., Shacham, M., 1999. *Problem solving in Chemical engineering with Numerical methods*. Prentice Hall, Upper Saddle River, NJ.
- Devries, N.P., 2014. CO₂ Absorption into concentrated carbonate solutions with promoters at elevated temperatures. University of Illinois Degree of Master of Science in Agricultural and Biological Engineering, Urbana, Illinois.
- Dolgopolas, V., Dagienė, V., Minkevicius, S., Sakalauskas, L., 2014. "Python for scientific computing education: modeling of queuing systems". *Sci. Programm.* 22, 37–51.
- Fernandez, E.S., 2013. Novel process designs to improve the efficiency of post-combustion carbon dioxide capture. Netherlands, University of Delft, PhD Chemical Engineering.
- Gáspár, J., Cormos, A., 2012. Dynamic modelling and absorption capacity assessment of CO₂ capture process. *Int. J. Greenhouse Gas Cont.* 8, 45–55.
- Geankoplis, C.J., 1993. *Transport processes and separation principles*. University of Minnesota, USA, Prentice Hall, pp. 426–634.
- Hamdi, S., Schiesser, W.E., Griffiths, G.W., 2009. Method of Lines. *Scholarpedia* 2 (7), 2859.
- Khan, F.M., Krishnamoorthi, V., Mahmud, T., 2011. Modelling reactive absorption of CO₂ in packed columns for post-combustion carbon capture applications. *Chem. Eng. Res. Design* 89, 1600–1608.
- Kothandaraman A., "Carbon Dioxide Capture by Chemical Absorption: A Solvent Comparison Study". Department of chemical engineering, Massachusetts Institute of Technology. Degree of Doctor of Philosophy in Chemical Engineering, 2010, 263.
- Mohammad R.M., Abbas Z., Singh P., Feron P., "Carbon Dioxide Post-Combustion Capture: Solvent Technologies Overview, Status and Future Directions". Materials and processes for energy: communicating current research and technological developments, 2013, A. Méndez-Vilas, Ed.
- Peng, J., Lextraat, S., Edgar, T., Eldridge, R.B., 2002. A comparison of steady-state equilibrium and rate-based models for packed reactive distillation columns. *Ind EngChem. Res.* 41, 2735–2744.
- Sadiku, M.N.O., Obizio, C.N., 2000. A simple introduction to the method of lines. *Int. J. Electr. Eng. Educ.* 3 (37), 282–296.
- Tsai, R.E., 2010. Mass Transfer Area of Structured Packing. The University of Texas at Austin Partial Fulfillment Doctor of Philosophy, Urbana, Illinois.
- Welty, J.R., Wicks, C.E., Wilson, R.E., Rorrer, G.L., 2007. *Fundamentals of Momentum, Heat, and Mass Transfer*. John Wiley & sons Inc., United States of America, pp. 398–432.