

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/266465043>

A quarter-wave Y-shaped patch antenna with two unequal arms for wideband Ultra High Frequency Radio-frequency identification (UHF RFID) operations

Article · October 2011

CITATIONS

3

READS

81

5 authors, including:



Anabi Hilary

Universiti Kebangsaan Malaysia

16 PUBLICATIONS 35 CITATIONS

[SEE PROFILE](#)



J. S. Mandeep

Universiti Kebangsaan Malaysia

255 PUBLICATIONS 1,667 CITATIONS

[SEE PROFILE](#)



Mohammad Tariqul Islam

Universiti Kebangsaan Malaysia

1,031 PUBLICATIONS 6,346 CITATIONS

[SEE PROFILE](#)



Jun-Jiat Tiang

Multimedia University

11 PUBLICATIONS 149 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



Microwave Sensor [View project](#)



Humanitarian Technology [View project](#)

Full Length Research Paper

A quarter-wave Y-shaped patch antenna with two unequal arms for wideband Ultra High Frequency Radio-frequency identification (UHF RFID) operations

Kelechi Hilary Anabi^{1*}, J. S. Mandeep^{1,2}, M. Islam and J. J. Tiang¹

¹Department of Electrical, Electronic and Systems Engineering, Faculty of Engineering and Built Environment, University Kebangsaan Malaysia, 43600, UKM, Bangi, Selangor DarulEhsan, Malaysia.

²Institute of Space Science, Faculty of Engineering and Built Environment, University Kebangsaan Malaysia, 43600, UKM, Bangi, Selangor DarulEhsan, Malaysia.

Accepted 02 September, 2011

The radio-frequency identification (RFID) system which has become pervasive in the auto identification technology has been noticed to have several limitations. These limitations can be broadly divided into two major areas namely; application specific problems and general RFID problems. Application specific problems are common to the environment in which RFID tags are deployed such as metal, aqueous and irradiation environments. Whilst, the general problem of RFID tags include low gain, regional specifications and so on. In this paper, a new antenna prototype has been design and stimulated. The proposed antenna showed tendency of exhibiting improved gain from the previous RFID UHF antenna which is 0-1 dBi to -3 dBi and impedance bandwidth of 140 MHz. The proposed antenna is Y shaped patch with unequal monopole arms which are responsible for the different frequencies that the antenna operates and a quarter wavelengths was adopted rather than the popular half wavelength for size reduction. The fractional return-loss bandwidth for $S_{11} < 10$ dB and radiation efficiency are about 95% was obtained.

Key words: Passive ultra high frequency radio-frequency identification (UHF RFID) tags, microstrip antenna, impedance bandwidth.

INTRODUCTION

The adoption of radio-frequency identification (RFID) technology in the supply chain industry and other fields of human endeavors have enhanced real time tracking of goods in the auto identification systems. The benefits derived from the real time tracking of goods has made RFID technology to be deployed in many fields such as logistics, information, commercial trade, manufacturing, traffic control management, etc (Ukkonen et al., 2006; Tikhov et al., 2007). All RFID systems be it passive - without battery, active - with battery and semi-passive-battery assisted make use RF in sending and receiving signals (Khan et al., 2009; Dobkin, 2007; Karmakar, 2010). However, passive UHF RFID tag which consists of a microchip and antenna as shown in Figure 1 uses additional technology known as back-scatter in

communicating with reader antenna.

Advances in wireless communications and RFID have introduced tremendous demands in the antenna technology (Azim et al., 2010a, b; Islam et al., 2009a, g; Liu et al., 2011; Mobashsher et al., 2010a, b). It also paved the way for wide usage of mobile phones in modern society resulting in mounting concerns surrounding its harmful radiation (Faruque et al., 2010a, b; Faruque et al., 2011a-e; Misran et al., 2010; 2011). (In addition to this, many parameters are considered when adoption RFID UHF systems. Of great importance to RFID system performance characteristic is tag range – the maximum distance at which RFID reader can either read or write information to the tag. Nikitin and Rao (2006) tag range is defined with respect to a certain read/write rate (percentage of successful reads/writes) which varies with a distance and depends on RFID antenna design and propagation environment. As a result of diverse materials and packages that need to be

*Corresponding author. E-mail: kelana05@yahoo.com.

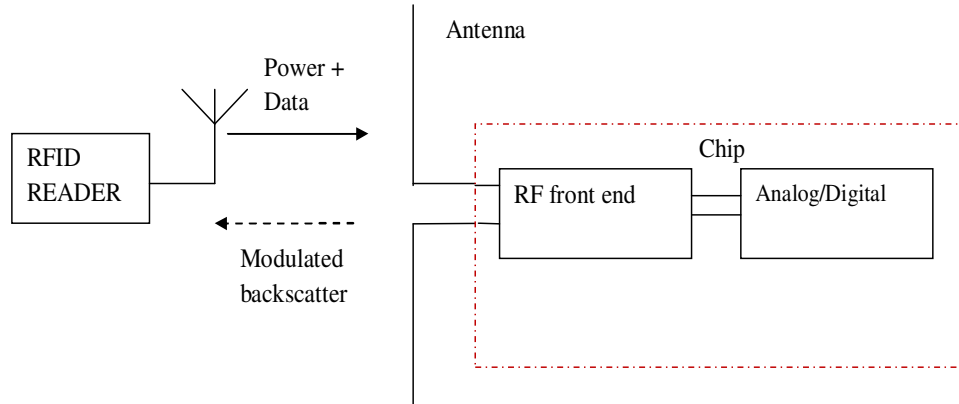


Figure 1. RFID system operation; Source: (Yu et al., 2006).

Table 1. Comparative study of different tag antennas.

Antenna	Pattern type	Free-space bandwidth (%)	Impedance (Ohms)	Polarization
Dipole	Ominidirectional	10-15	50-80	Linear
Folded dipole	Ominidirectional	15-20	100-300	Linear
Printed dipole	Directional	10-15	50-100	Linear
Printed patch	Directional	2-3	30-100	Linear/circular
Log spiral	Directional	100	50-100	Circular

identified, lots of challenges has been faced in developing tag antenna UHF RFID systems. Such challenges include but limited to the following; impedance match between tag antenna and the microchip so as ensure maximum power transmission coefficient, decrease the losses and improve the read range. Designing an efficient tag antenna has led many researches to come out with various design models such as; Traveling Wave Antennas (TWAs), Meander-line antenna, Dipole antenna, Monopole antenna or slight variations of the above methods (Son et al., 2006; Faruque et al., 2011a-e; Islam et al., 2010a,b; Shakib et al., 2009; 2010). None of the mentioned techniques has yielded a gain more than 0 and 1 dBi. RFID systems operating at ultra-high-frequency (UHF) bands are the preferred choice when longer interrogation range of several meters is needed, and high frequency (HF) is used when electromagnetic fields that exhibit good material penetration and sharp spatial field confinement such as metallic and aqueous environment are required and low system implementation cost is desired.

In low-frequency systems, copper wire is normally wound in huge number of turns and in UHF frequencies, a different approach is taken. This approach involves using a single turn, dipole or patch antennas and Table 1 provides a comparative study of different tag antenna configurations. No matter what type of antenna being considered, some properties of tag antenna have to be considered (Finkenzeller, 2003; Raz et al., 1999; Tuttle, 1997; Azim et al., 2011a-c). These include:

1. Be small enough to be attached to the required object,
2. Have omnidirectional or hemispherical coverage to ensure non-line-of-sight operation of the tag,
3. Must provide maximum possible signal to the ASIC,
4. Have a polarization such as to match the enquiry signal regardless of the physical orientation of the tagged object,
5. Be robust and very cheap,
6. Frequency band. This is country specific as many countries or regions operates in a give frequency bandwidth,
7. EIRP. EIRP (effective isotropic radiated power) is also determined by local country regulations just like frequency band.

In this paper, a new wide slot microstrip antenna (MSA) prototype was designed and stimulated. The proposed antenna is a Y shaped patched antenna with an inverted F ground plane. The proposed antenna makes use of quarter wave length and thus has a considerably reduced total length. Moreover, the proposed antenna exhibit the fundamental benefits of MSA such as low cost, light weight and ease of fabrication.

RFID TAGS

RFID tag performance parameters

Finkenzeller (2003) RFID tag efficiency is defined in

terms of tag factors with emphasis on tag performance characteristics such as: read range, directionality, sensitivity to materials also, combines with tag operating band to inhibit the maximum attainable antenna gain of the RFID tag. Impedance matching between the tag and the chip are crucial for the tag to perform in optimum capacity. Impedance matching for maximum tag range is usually done at the chip threshold power level which also depends on frequency and absorbed power of the RFID tags. There are numerous literatures on RFID tags optimum performance (Finkenzeller, 2004; Curty et al., 2007). Different form factors of RFID tags are commercially available (Shakib et al., 2010; Azim, 2010; Islam et al., 2009a, b). Ramakrishnan and Deavours (2006) have shown detailed comparative performance evaluations of various tags. The two most sensitive factors of tag performance and measurement are discussed as follows:

1. Tag sensitivity,
2. Tag range.

Tag sensitivity is defined as the minimum signal strength at the tag location needed to power up the tag (Curty et al., 2007). Unlike other tag parameters, this important tag characteristic is independent of the reader transmitted power or propagation environment. Rather, it is depends on the chip threshold power sensitivity, tag antenna gain, and match between tag antenna and high (power collecting) impedance state of the chip.

Tag field sensitivity tag E (V/m) and power sensitivity P_{tag} are directly related as shown in Equation 1 and visualized in Figure 2 (Nikitin and Rao, 2008). The power available at a perfectly matched antenna load (chip) can be express either through incident power P_i and tag antenna gain G or through incident power density P_{inc} and effective tag antenna A_{eff} :

$$P_{tag}G = S A_{eff} \tag{1}$$

Where S is the power density given as:

$$S = \frac{E^2}{120\pi} \tag{2}$$

Where E is the electric field of an incoming wave:

$$E_{tag} = \frac{4\pi}{\lambda} \sqrt{P_{tag}} \tag{3}$$

Thus tag power sensitivity can also be readily expressed as:

$$P_{tag} = Gp \tau P_{th} \tag{4}$$

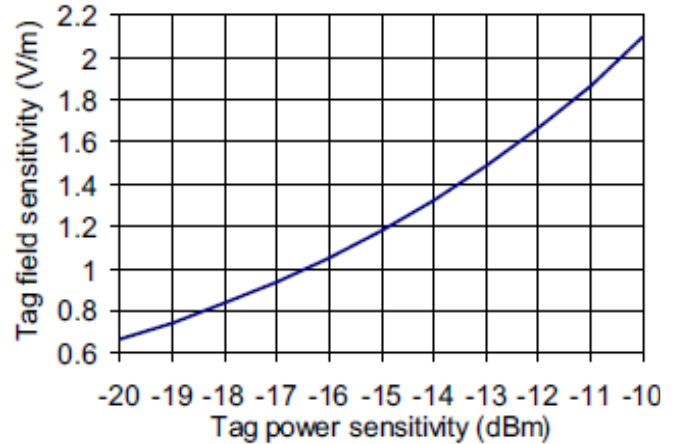


Figure 2. Tag field sensitivity (V/m) vs. tag power sensitivity (dBm), frequency is 915 MHz. Source: (Nikitin and Rao, 2008).

Where p is the polarization efficiency, τ is the impedance matching coefficient between the tag antenna and the chip, and P is the chip power threshold sensitivity.

Equation (4) shows how much minimum incident power at the tag location is needed to make sure that the sufficient amount of it gets absorbed in the RFID chip and activates it.

Tag range

One of the frequent questions asked by supply chain users of the RFID tag is range of the tag. Tag range here is defined as the maximum range at which a tag can be read. Tag range measurement is not a complex experiment to undergo. It is much simpler to determine the read range of a single tag, which is mostly done in a large stationary anechoic chamber (Glidden et al., 2004). Tag range does not only depend on tag sensitivity but also on system parameters. The systems parameters in which these tags depends on are EIRP transmitted by the reader, propagation environment path loss, and tag sensitivity. Write range (maximum distance at which the tag can be written to) is usually lower than read range (approximately 70% of it) because RFID IC needs more power for performing write operation. If we assume that the maximum readable range of the tag is limited only by tag sensitivity, then tag read range can be calculated in an arbitrary propagation environment via link budget equation which equates signal strength at the tag to the tag power sensitivity.

$$P_i G_t L_{path}(d) = P_{tag} \tag{5}$$

There have been occasions where an inverse function of distance dependent path loss $L_{path}^{-1}(d)$ could be

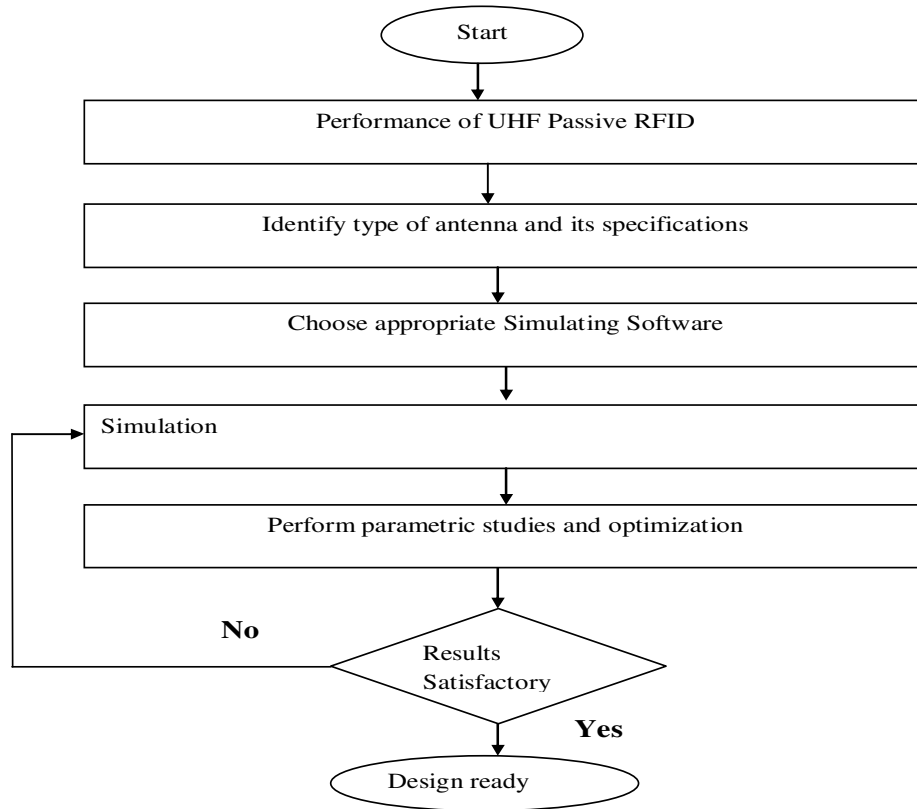


Figure 3. Flow chart on the simulation of the proposed antenna.

solved in an analytical form. Equation (5) could be analytically used to solve the problem of tag range. One of such occasions is the free space path loss occasions or friss equation, where the path loss is proportional to path d^{-2} (Nikitin and Rao, 2003; Son and Choi, 2006) and the tag range can be found to be:

$$r_{tag} = \frac{\lambda}{4\pi h} \sqrt{\frac{P_{th} G_{th} p \tau}{P_{tag}}} \quad (6)$$

Equation (7) highlights the relationship between tag range in free space, tag field sensitivity and the tag power sensitivity.

$$r_{tag} = \frac{\lambda}{4\pi} \sqrt{\frac{30 P_{th} G_{th}}{E_{tag}}} = \frac{\lambda}{4\pi h} \sqrt{\frac{P_{th} G_{th}}{P_{tag}}} \quad (7)$$

RFID TAG ANTENNA STRUCTURE AND DESIGN

Antenna design

The performance of RFID is strongly dependent on many variables. Such variables includes but not limited to;

frequency of operations, tag-chip impedance matching and so on. The tag range needs to be closely monitored in order to meet the design requirements of the RFID tag systems. In order to carry out a comprehensive study of RFID systems, a flow chart was designed and implemented Figure 3. The flow chart in investigates the problem statement and proceeds to describe the design.

The geometry of the proposed CPW – fed wide slot microstrip antenna for broadband high gain UHF tag is shown in Figure 3. The antenna will be fabricated on a Rogers RT 6202 substrate with thickness of 1.524 mm, a dielectric constant of ϵ_r of 2.94 ± 0.04 , and a loss tangent of $\tan \delta = 0.0015$ with an inverted F copper ground plane of $85 \times 62.50 \text{ mm}^2$. The overall size of the antenna is $0.22\lambda_o \times 0.20 \lambda_o$. After several optimization, the following dimensions in millimeters gave the best results for the radiating patch ($P_a= 3.0$, $P_b=42$, $P_c=36$, $P_d=2$, $P_f=38$). For the ground plane, the following dimensions in millimeters were also used for the best result of the antenna ($G_a = 2.8$, $G_b = 84$, $G_c = 57$, $G_d = 4.50$, $G_e = 60$, $G_f = 55$). Coplanar Wave guide dimensions are also in millimeters ($W_a= 16$, $W_b=3$).

A CPW transmission line was used and it consists of a single strip length of 16 mm and a planar lower portion with a 4.50 mm thickness of the inverted F ground plane. The basis of the antenna structure is a wide slot patch, which has dimensions of 42 mm in the upper length of

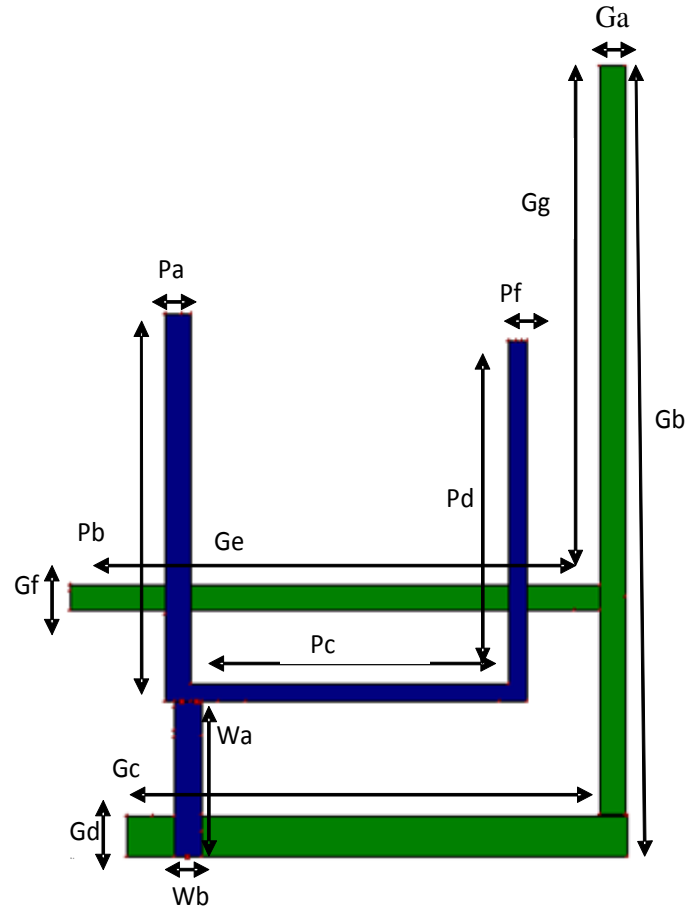


Figure 4. Proposed antenna geometry.

the Y patch and 38 mm in the lower length of the patch. Both arms are connected with a horizontal patch length of 38 mm. In addition, the proposed wide slot antenna is connected to the lower end of the inverted F ground plane in a distance of 5.6 mm for maximum gain. The use of large ground plane of 84 mm length by 57 mm in the lower section of the ground plane plays a major part in the achieved gain. The most significant portion of the ground plane is the middle arm with a dimension of 60 mm. This middle arm contributes tremendously to the overall gain of the wide slot monopole antenna. The blue color and green color in Figure 3 represents the patch and the ground plane respectively.

SIMULATIONS

The antenna was stimulated using IE3D which is a full wave simulation software based on method of moments (MoM). Figure 3 shows the stimulation frequency response of the return loss for the proposed wide slot microstrip antenna. The return loss of the slot antenna as presented in Figure 4 shows a BW of 150 MHz or 16%.

The gain of the antenna is approximately 3 dBi at the resonant frequency of 930 MHz as shown in Figure 5. Microstrip antennas are well known for their inherent shortcoming of narrow bandwidth (Pozar, 1991). When a microstrip antenna is designed to operate in frequency ranges of 800 and 900 MHz, experiences have shown that it performs well but exhibit narrow bandwidth limiting the operation at one frequency. In as much as the patch and slot are designed to resonate at the same frequency, then the antenna will display a wide bandwidth at the design frequency. The aforementioned technique has been extensively used in microstrip technology to produce broadband antennas (Mobashsher et al., 2010). Many techniques have been used in patch antenna bandwidth enhancement (Islam et al., 2010). The most prevalent in these techniques is the impedance matching at the source (Finkenzeller, 2004). Multilayered structures are proposed in some techniques but this technique cannot be used in RFID technology due to the fact that it is bulky and non-planar in RFID applications sense (Widad et al., 2008; Mandeep and Hilary, 2010). The wide slot monopole RFID tag designed in a single planar layer as shown Figure 3 antenna exhibited a high gain

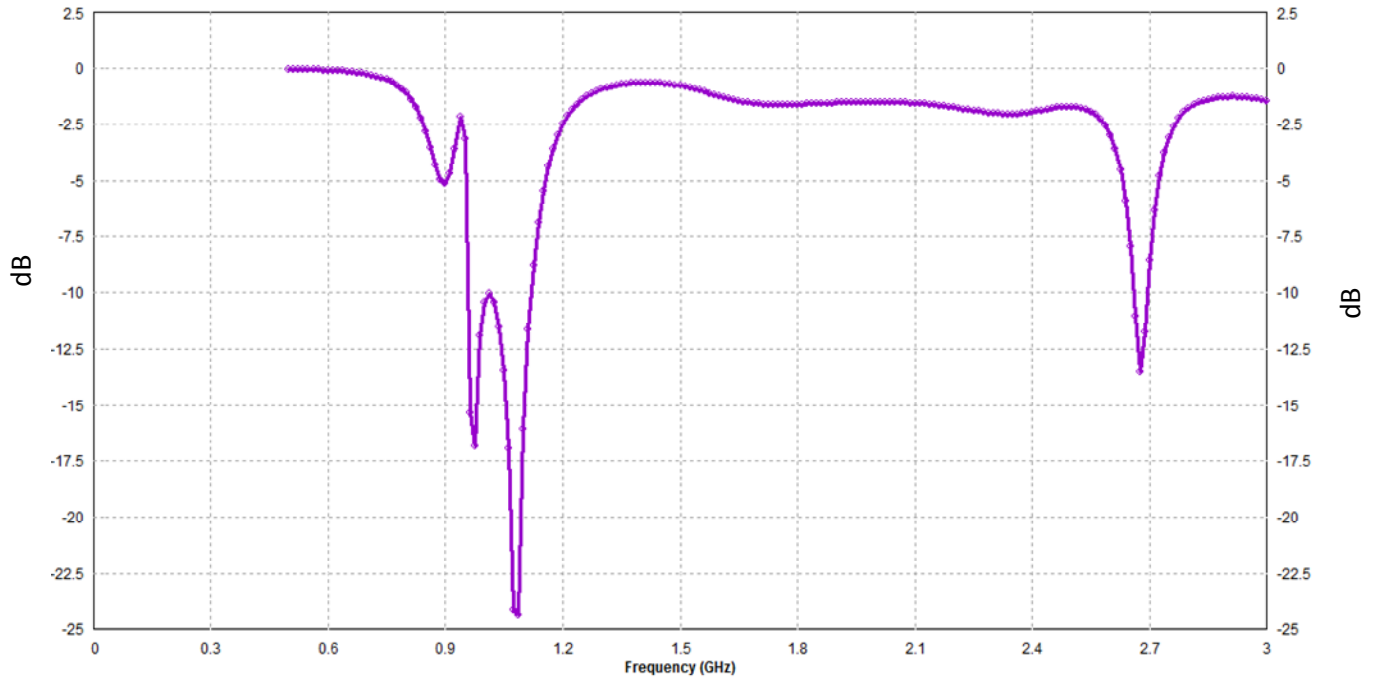


Figure 5. Return loss of the proposed wide slot MSA.

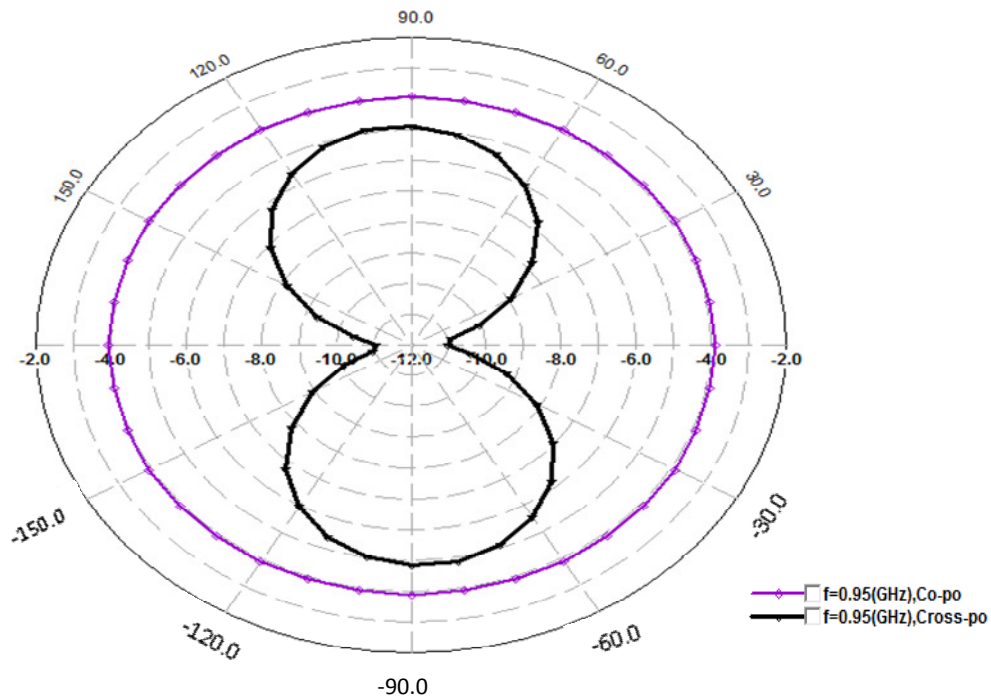


Figure 6a. Azimuth pattern gain display at 0°.

and broadband width. The wide bandwidth from 930 to 1170 MHz is as the result of the wide U slot adopted because microstrip antenna has an inherent disadvantage of narrow bandwidth.

Figure 6(a) and (b) plot the measured radiation pattern at 0.95 MHz for the proposed antenna. The patterns observed to be stable for operating at the said frequency. It is also noted that, at the operating

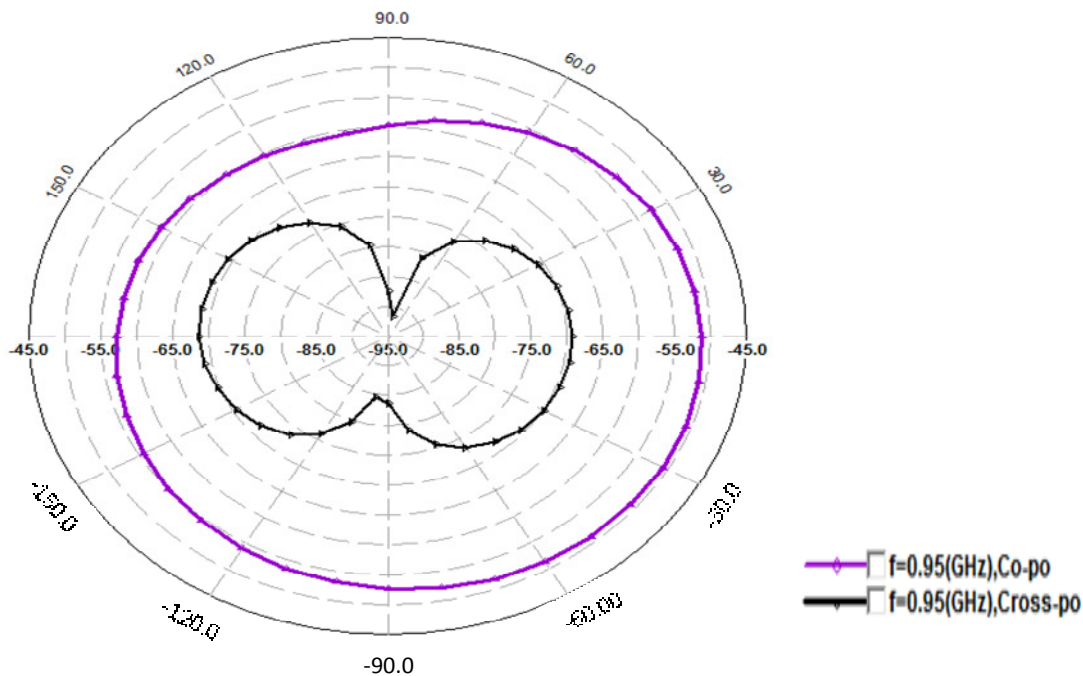


Figure 6b. Azimuth pattern gain display at 90°.

Table 2. Effects of ground plane reduction by 5 mm.

Ground plane	Optimized	5 mm short
Ga	2.8	2.8
Gb	84	84
Gc	57	57
Gd	4.50	4.50
Ge	60	55
Gf	3.0	3.0

frequency, the patterns in E plane are nearly omnidirectional and those of H plane are in symmetry with respect to the antenna axis ($\theta = \theta^\circ$) since the antenna's structure is in symmetry. However, in the E plane, the peak radiations are positioned at about 30° right and left shifts from the center ($\theta = \theta^\circ$) according to the appropriate positions of the dominant frequency which is 0.95 MHz.

INFLUENCE OF THE GROUND PLANE

It is well known that monopole-type antenna performance is independent on ground-plane effects (Arkko, 2003) and an evaluation of the dependence of printed strip monopole performance on ground-plane size has been carried out (Ammann and John, 2005). The shaped ground plane has recently been investigated for increased impedance and pattern bandwidth (Zhang and Fathy, 2006). The

bandwidth of wide-slot antennas have been enhanced using a microstrip fork-like feeds (Sze and Wong, 2001; Qing et al., 2001). From the Table 2, it was evident that when the middle arm length of the ground plane was decreased by 5 mm, the resonance frequency of the shifts 930 to 960 MHz in the lower frequency band and there is a decrease in bandwidth of the proposed antenna. We decided to choose 5 mm short in ground plane to show the intricate nature of the ground plane and how a small change may affect and shift the total gain of the proposed antenna.

It is evident that the lower the ground plane, the lower the gain of the antenna as can be seen Figure 7. It can be seen from the graph within that the ground plane of a monopole antenna plays a crucial part in the overall gain of the antenna. The maximum gain in the lower region which is 930 to 960 MHz decreases from approximate 3 dBi to 2.5 dB as can be seen in Figure 8. The current distribution as shown in Figure 9 shows that current is uniformly distributed both in radiating patch and ground

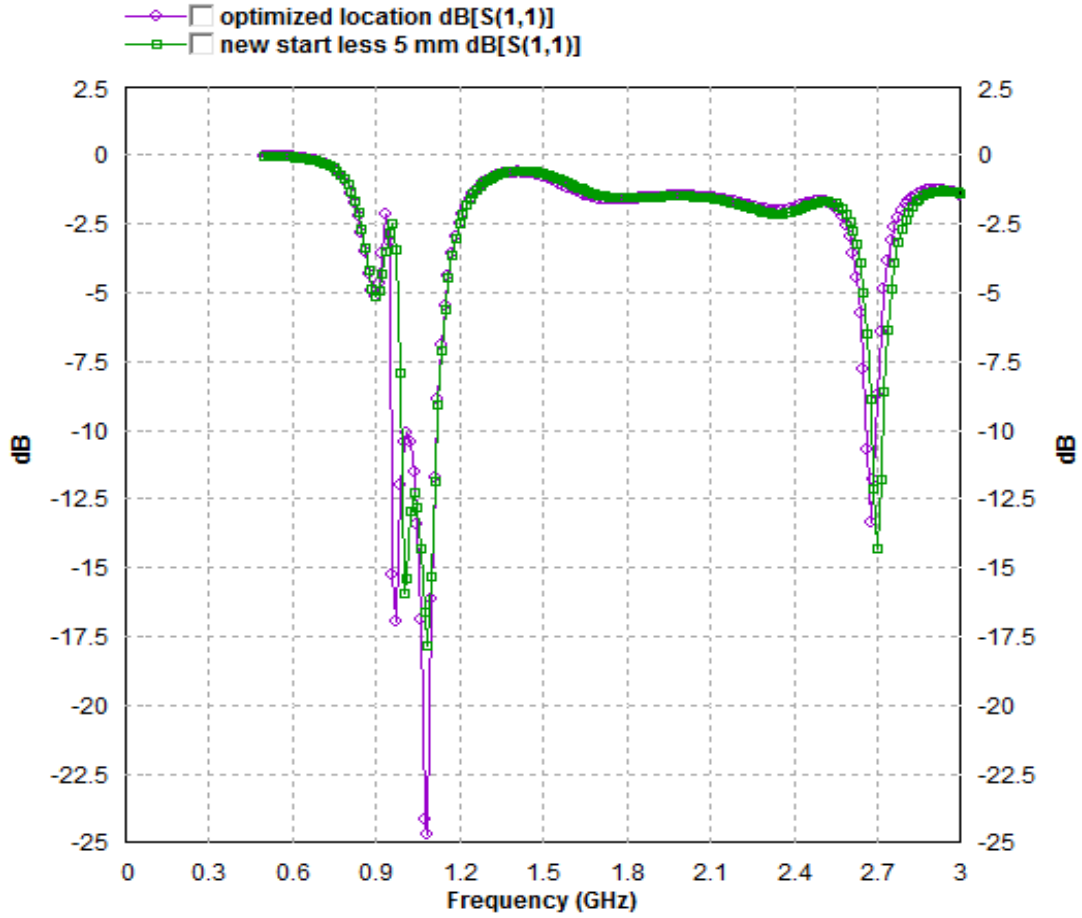


Figure 7. Return loss graph of reduced ground plane.

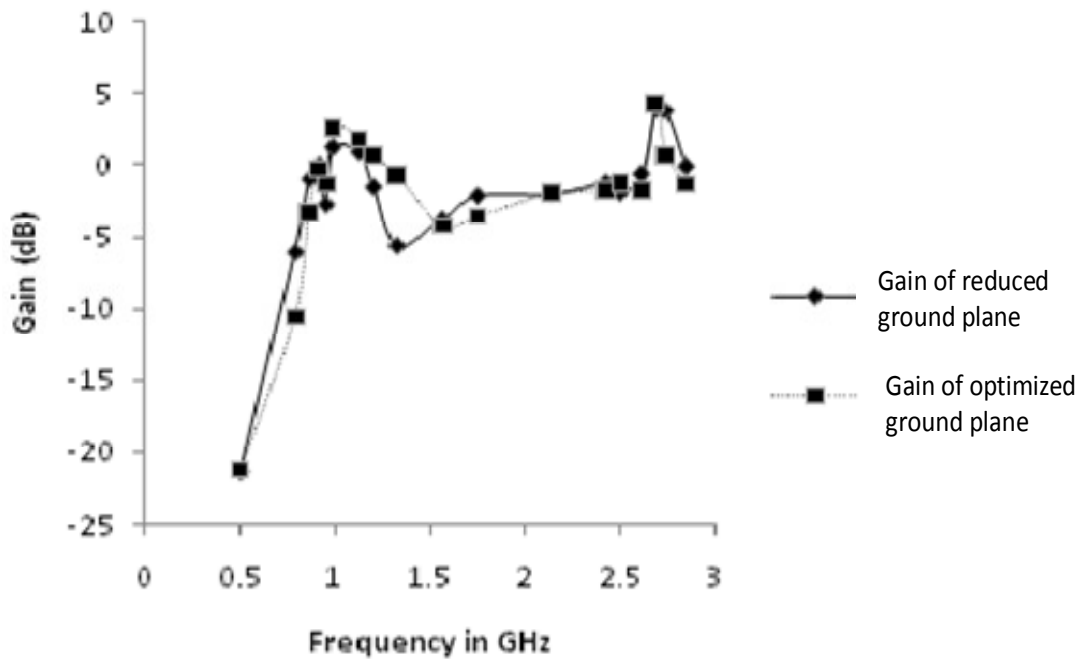


Figure 8. Change in gain as a result of change in ground plane.

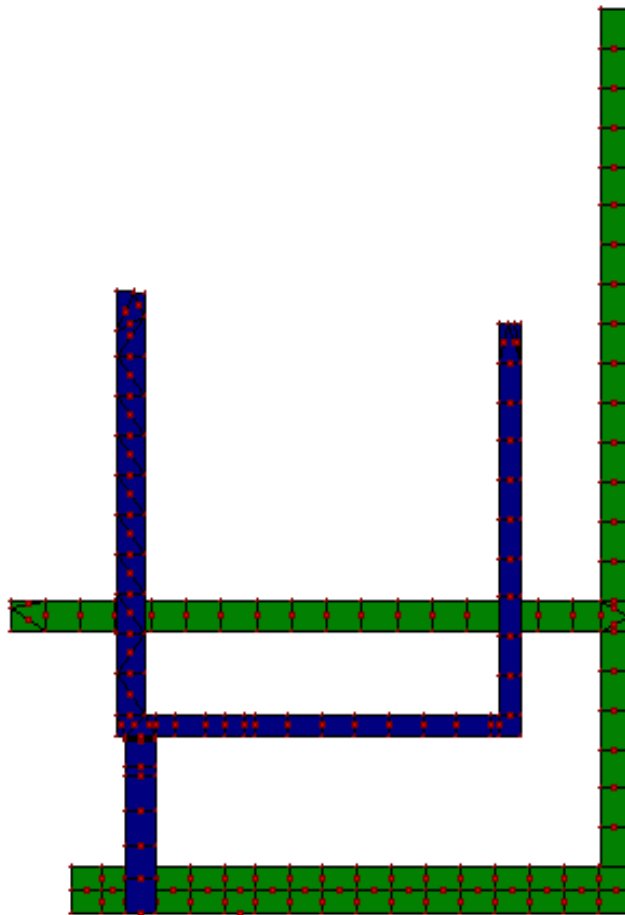


Figure 9. Current distribution of the proposed antenna.

plane. The conciseness of the antenna contributed in no small measure to decrease the movement of electrons to the surrounding space and helps in the high gain as exhibited in the proposed antenna. Conclusions could be drawn that the longer the ground plane, the lower the resonant frequency of the proposed antenna while the shorter the ground plane, the tendency for the upper frequency to be the key resonant frequency.

Conclusions

Broadband wideband frequency operations of a simple CPW fed- planar monopole antenna suitable for UHF RFID tag antenna has been studied. By embedding wide slot in the form of U in the radiating patch and adoption of inverted F ground plane, a wide impedance bandwidth of 140 MHz or over 10% were achieved. From the radiation pattern, it shows that the antenna radiates in all directions and this omnidirectional capability has made the antenna suitable for RFID tag antenna. The antenna design fulfilled the bandwidth requirement needed to operate in wideband ultra high frequency band spectrum.

ACKNOWLEDGEMENT

The authors would like to acknowledge University Kebangsaan Malaysia, PKT1/2010 and UKM-DLP-2011-003.

REFERENCES

- Ammann MJ, John M (2005). Optimum design of the printed strip monopole. *IEEE Ant. Propagation, Mag.*, 47(6): 59–61.
- Arkko A (2003). Effect of ground-plane size on the free-space performance of a mobile handset PIFA antenna. *IEE Int. Conf. Ant. Propag. (ICAP)*(1):316–319.
- Azim R, Islam MT, Misran N (2010a). A planar monopole antenna for UWB applications. *International Review of Electrical Engineering*, 5(4): 1848-1852.
- Azim R, Islam MT, Misran N (2010b). Printed planar antenna for wideband applications. *J. Infrared, Millimeter Terahertz Waves*, 31(8): 969-978.
- Azim R, Mobashsher MT, Islam MT (2011a). UWB Band-notch antenna with a semicircular annular strip. *Trends Appl. Sci. Res.*, 6(9): 1078-1084.
- Azim R, Islam MT, Misran N (2011b). Ground modified double-sided printed compact UWB antenna. *IET Electronics Lett.*, 47 (1): 9-11.
- Azim R, Islam MT, Misran N, Cheung SW, Yamada Y (2011c). Study of planar UWB antenna with multi-slotted ground plane. *Microwave Optical Technol. Lett.*, 53(5): 966-968.

- Curty JP, Declercq M, Dehollain C, Joehl N (2007). Design and Optimization of Passive UHF RFID Systems, Springer.
- Faruque MRI, Islam MT, Misran N (2010a). Effect of human head shapes for mobile phone exposure on electromagnetic absorption. *Informacije MIDEM.*, 40(3): 232-237.
- Faruque MRI, Islam MT, Misran N (2010b). Evaluation of specific absorption rate (SAR) reduction for PIFA antenna using Metamaterials. *Frequenz J.*, 64(7-8): 144-149.
- Faruque MRI, Islam MT, Misran N (2011a). Analysis of Electromagnetic Absorption in the Mobile Phones Using Metamaterials. *Electromagnetics J.*, (Taylor & Francis Group). 31 (3): 215-232.
- Faruque MRI, Islam MT, Misran N (2011b). Design of handset antenna with low electromagnetic absorption. *Australian J. Basic Appl. Sci.*, 5(3): 141-150.
- Faruque MRI, Islam MT, Misran N (2011c). Design of metamaterial attachment for SAR reduction in human head. *Appl. Comput. Electromagnetic Society J.*, (ACES Journal) 25(12): 1097-1107.
- Faruque MRI, Islam MT, Misran N (2011d). Electromagnetic (EM) absorption reduction in a muscle cube with metamaterial attachment. *Med. Eng. Phys.*, (Elsevier). 33(5): 646-652.
- Faruque MRI, Misran N, Nordin R, Islam MT, Yatim B (2011e). Estimation of specific absorption rate (SAR) and temperature increases in the human head of portable telephones. *Sci. Res. Essays (SRE)*. 6(6): 1209-1215.
- Finkenzeller K (2004). *RFID Handbook: Radio-Frequency Identification Fundamentals and Applications*. Wiley Publisher.
- Glidden R, Bockorick C, Cooper S, Diorio C, Dressler D, Gutnik V, Hagen C, Hara D, Hass T, Humes T, Hyde J, Oliver R, Onen O, Pesavento A, Sundstrom K, Thomas M (2004). Design of ultra low cost UHF RFID tags for supply chain applications. *IEEE Com. Mag.*, 42, (8):140-151.
- Islam MT, Faruque MRI, Misran N (2009a). Design analysis of ferrite sheet attachment for SAR reduction in human head. *Progress Electromag. Res.*, PIER, 98: 191-205.
- Islam MT, Faruque MRI, Misran N (2009b). Reduction of specific absorption rate (SAR) in the human head with ferrite material and Metamaterial. *Progress Electromagnetics Res.*, PIER C, 9: 47-58.
- Islam MT, Moniruzzaman M, Shakib MN, Misran N (2009c). Curve fitting based particle swarm optimization for uwb patch Antenna. *J. Electromag. Waves Appl.*, 23(17-18): 2421-2432.
- Islam MT, Shakib MN, Misran N (2009d). Broadband E-H shaped microstrip patch antenna for wireless systems. *Progress Electromag. Res.*, 98: 163-173.
- Islam MT, Shakib MN, Misran N (2009e). Design analysis of high gain wideband L-probe fed microstrip patch antenna. *Progress Electromag. Res.*, 95: 397-407.
- Islam MT, Shakib MN, Misran N (2009f). Modified E-H shaped microstrip patch antenna. *IEICE Electronics Express*, 6(18): 1350-1354.
- Islam MT, Shakib MN, Misran N (2009g). Multi-slotted microstrip patch antenna for wireless communication. *Progress Electromag. Res. Lett.*, 10: 11-18.
- Islam MT, Faruque MRI, Misran N (2010a). Specific absorption rate analysis using metal attachment. *Informacije MIDEM*, 40 (3): 238-240.
- Islam MT, Faruque MRI, Misran N (2010b). Study of specific absorption rate (SAR) in the human head by metamaterial attachment. *IEICE Electronics Express*, 7(4): 240-246.
- Islam MT, Azim R, Misran N, Mat K, Bais B (2010c). Design and Optimization of a printed rectangular antenna for ultra-wideband applications. *World Appl. Sci. J.*, 10(11):1379-1386.
- Islam MT, Mobashsher AT, Misran N (2010d). A novel feeding technique for a dual band microstrip patch antenna. *IEICE Trans. Commun.*, E93-B (9): 2455-2457.
- Islam MT, Mobashsher AT, Misran N (2010e). Design of microstrip patch antenna using novel U-shaped feeding strip with unequal arm. *Electronics Lett.*, 46 (14):968-970.
- Islam MT, Shakib MN, Misran N (2010f). High gain W-shaped microstrip patch antenna. *IEICE Electronics Express*. 7(20): 1546-1551.
- Islam MT, Shakib MN, Misran N (2010g). Study of broadband microstrip antenna for wireless communications. *Australian J. Basic Appl. Sci.*, 4(10): 5199-5204.
- Islam MT, Faruque MRI, Misran N (2011). Electromagnetic (EM) absorption rate reduction of helix antenna with shielding material for mobile phone application. *Australian J. Basic Appl. Sci.*, 5(3): 120-133.
- Liu L, Cheung SW, Azim R, Islam MT (2011). A compact circular-ring antenna for ultra-wideband applications. *Microwave Optical Technol. Lett.*, 53(10): 2283-2288.
- Mandeep JS, Hilary KA (2010). Study Reliability of Radiated RFID Tags. *Microw.*, RF.(10): 77-81.
- Mandeep JS, Hilary KA (2011). Effects of polarization loss factor, form factors and reader transmitting power on the range of paper and plastic UHF tags in a free and metallic environment. *Int. J. Phys. Sci.*, 6(12): 2776-2781.
- Misran N, Islam MT, Ansarudin F (2010). Stacked microstrip patch antenna for high gain application. *Sains Malaysiana*, 39 (4):633-638.
- Misran N, Faruque MRI, Islam MT, Abedin HZ (2011). Investigation of dosimetry in human head model for a helical antenna with mobile phone. *Int. J. Phys. Sci.*, 6(5): 1000-1008.
- Mobashsher AT, Bais B, Misran N, Islam MT (2010a). Compact wideband microstrip antenna for universal 5GHz Wlan applications. *Australian J. Basic Appl. Sci.*, 4(8): 3411-3417.
- Mobashsher AT, Islam MT, Misran N (2010b). Coplanar waveguide fed printed antenna with compact size for broadband wireless applications. *J. Infrared, Millimeter Terahertz Waves*. 31 (12): 1427-1437.
- Nikitin PV, Rao KV (2006). *Performance Limitations of Passive UHF RFID SYSTEMS*. Intermecc Technologies Corporation.
- Qing X, Chia M, Wu X (2001). Wide slot antenna for UWB applications. *IEEE Int. Ant. and Prop. Symp. Dig. Boston*, pp. 1834-1837.
- Shakib MN, Islam MT, Misran N (2010a). High gain W-shaped microstrip patch antenna. *IEICE Electr. Exp.* 7(20) 1546-1551.
- Shakib MN, Islam MT, Misran N (2010b). Stacked patch antenna with folded patch feed for ultra-wideband application. *IET Microwaves, Antennas Propagation*, 4(10): 1456-1461.
- Son HW, Choi GY, Pyo CS (2006). Design of Wideband RFID antenna for metallic surfaces. *Electron. Lett.*, 4(5): 263-265.
- Sze JY, Wong KL (2001). Bandwidth enhancement of a microstrip-line-fed printed wide-slot antenna. *IEEE Trans. Ant Propag.*, 49(7): 1020-1022.
- Tikhov Y, Song IJ, Min YH (2007). Compact ultrahigh-frequency antenna designs for low-cost passive RFID transponders" *IET Microw. J. Ant Propag.*, 1(5): 992-997.
- Ukkonen L, Schaffrath M, Engels DW, Sydänheimo L, Kivikoski M (2006). Operability of Folded Microstrip Patch-Type Tag Antenna in the UHF RFID Bands. *IEEE ant. andw. Propag. Lett.*, p. 5.
- Widad I, Mandeep JS, Saeed J (2008). Secure Multi-access Channel Using UW B for next generation RFID system. *Microw. J.*, 51(9): 63-68.
- Zhang C, Fathy AE (2006). Development of an ultra-wideband elliptical disc planar monopole antenna with improved omni-directional performance using a modified ground. *IEEE Int. Ant. Propag. Symp. Dig.*, pp. 1689-1692.