



FACULTY OF ENGINEERING AND ENVIRONMENTAL SCIENCES

OSUN STATE UNIVERSITY
OSOGBO, OSUN STATE, NIGERIA

PROCEEDINGS

OF THE

***1ST INTERNATIONAL CONFERENCE ON
ENGINEERING AND ENVIRONMENTAL SCIENCES***

(NOVEMBER 5-7, 2019)

THEME

**ADVANCING TECHNOLOGY AND ENVIRONMENTAL
BURDENS: CHALLENGES AND SUSTAINABLE SOLUTIONS**

EDITORS: Abidoeye, L.K.; Okedere, O.B.; Alawode, K.O.; Ibrahim, R.B.;

Adebanjo, A.U.; Thanni, M.O.; Adeyemo, K.A.

© Faculty of Engineering and Environmental Sciences, Osun State University, 2019

Proceedings of the 1st International Conference on Engineering and Environmental Sciences

All rights reserved.

No part of this publication may be reproduced or stored in a retrieval system, transmitted in any form or by any means, electronics, mechanical photocopying, recording or otherwise without the prior permission of the publishers.

Published in January 2020

ISBN:

Published by: Faculty of Engineering and Environmental Sciences, Osun State University,
Osogbo, Osun State, Nigeria.

PREFACE

The 1st International Conference on Engineering and Environmental Sciences was the first international conference organized by the Faculty of Engineering and Environmental Sciences, Osun State University. The aims of the conference include to foster interactions and collaborations among members of academia, industries and traditional stakeholders across the globe, with a view to tackling the challenges to sustainable development. To address socio-economic and environmental challenges facing our country and the world at large, the Faculty seeks to position itself strategically, using these formal and intellectual interactions, to proffer ingenious solutions and also initiate same with interested stakeholders. By so doing, the Faculty is promoting its ideals to the society and also fulfilling its part in the town and gown relationship.

As elucidated by the theme of the conference- *ADVANCING TECHNOLOGY AND ENVIRONMENTAL BURDENS: CHALLENGES AND SUSTAINABLE SOLUTIONS*, this conference brought to the fore, the burdens of development borne by the environment as a result of global strives for increased and improved production of building materials, automobiles, agriculture, healthcare, textiles and so on. During this conference, local, national and international participants have demonstrated the various approaches to the solutions theoretically, empirically and numerically.

Having evaluated, revised and edited the various submissions by the participants to produce this proceedings, it is believed that readers will find in this proceedings, intellectual treasures of inestimable values, to further push the frontiers of knowledge to the next level. It is hope that the last participants of the conference and readers of this proceedings will keep up the good work of research and intellectualism and produce qualitative works to qualify for the next edition of the conference.

Finally, our immense appreciations go to the members of the local organizing committee as well as the local, national and international participants for using their time, energy and material resources to make the event worthwhile.

Engr. Dr. A.A. Bello

Ag Dean, Faculty of Engineering and Environmental Sciences

Table of Contents

PREFACE	ii
TIME HEADWAY AS INDICES OF TRAFFIC CONGESTION	1
<i>Emmanuel, A.A. and Mohammed, H.</i>	<i>1</i>
SOME PHYSICAL PROPERTIES OF COMMON VARIETIES OF WATERMELON SEED	12
<i>Obi, O.F.</i>	<i>12</i>
EFFECTS OF PALM OIL POLLUTION ON THE SUBGRADE CALIFORNIA BEARING RATIO UNDER SOAKED CONDITION	24
<i>Adeyinka, S.M., Adeyinka, A.I., Adeyinka, C.O. and Sobo, K.S.</i>	<i>24</i>
RAINFALL INTENSITY-DURATION-FREQUENCY MODELS FOR IBADAN USING OPTIMIZATION TECHNIQUE	34
<i>David, A.O., Nwaogazie, I.L., Opafola, O.T., Babalola, A.A. and Lawal, N.S.</i>	<i>34</i>
DEVELOPMENT OF AN INTELLIGENT BATTERY CHARGING SYSTEM BASED ON PIC16F877A MICROCONTROLLER	45
<i>Nwosu, E.U., Olalere, N.A., Shopade, G.N. and Ogbodo, J.I.</i>	<i>45</i>
ASSESSMENT OF VOLUMETRIC SHRINKAGE AND HYDRAULIC CONDUCTIVITY OF LATERITE STABILIZED -COW BONE ASH ADMIXTURE AS LINER MATERIALS	63
<i>Bello, A. A.; Raji, O.I. and Ameen, I.O.</i>	<i>63</i>
DESIGN AND FABRICATION OF A PLASTIC CRUSHER	75
<i>Adesina, A.O., Adedeji, W.O. and Ajiboshin, I.O.</i>	<i>75</i>
EFFECTS OF UNREGULATED CONCRETE PRODUCTION PRACTICES BY NIGERIAN MASONS: A CASE STUDY OF OSOGBO, OSUN STATE, NIGERIA	84
<i>Oriafe, A.T. and Adeoye, A.A.</i>	<i>84</i>

INFLUENCE OF COMPACTION ENERGIES ON SOIL SAMPLES FROM ABEOKUTA-SOUTH LOCAL GOVERNMENT AREA OF OGUN STATE, SOUTHWESTERN NIGERIA	95
<i>Bello, A. A., Oriaje, A. T. and Raji, Z. A.</i>	95
EFFECT OF PH AND SUGAR LEVEL ON HEAT RESISTANCE OF <i>ESCHERICHIA COLI</i> IN SWEET ORANGE JUICE (<i>CITRIUS SINENSIS</i>) SOLD IN KAURA NAMODA MARKET.	108
<i>Hassan, A.B., Tanko, H.O. and Adegboye, Y.</i>	108
USERS' LEVEL OF AWARENESS ON GREEN FEATURES IN RESIDENTIAL BUILDINGS: EXPERINCE FROM IBADAN MUNICIPALITY, NIGERIA	125
<i>Adejumo, A.O., Oyedele, D.J., Adeosun, J.O. and Ehuleye, P.K.</i>	125
AN ASSESSMENT OF EXISTING GREEN FEATURES IN RESIDENTIAL BUILDINGS IN IBADAN MUNICIPALITY.	137
<i>Adejumo, A.O., Oyedele, D.J., Adedokun, A.R., Fayomi, I., Adeosun, J.O.</i>	137
ASSESSMENT OF THE EXTENT OF PARTICIPATION OF INDIGENOUS CONTRACTORS IN MAJOR CONSTRUCTION ACTIVITIES IN OSUN STATE	148
<i>Adeosun, J.O., Fadipe O.O. and Adejumo, A.O.</i>	148
EXPERT WITNESSING IN REAL ESTATE LITIGATION PRACTICE IN IBADAN METROPOLIS: THE ESTATE SURVEYORS AND VALUERS' PERSPECTIVE	159
<i>Adedokun, A. R. and Oladokun, T. T.</i>	159
HYDRAULIC MODELING OF A NATURE-BASED APPROACH TO SUBMERGED FLEXIBLE DRAINAGE LINING	173
<i>Suleiman, M. and Busari, A.O.</i>	173
EFFECT OF CONTINUITY OF REFINERY ON THE WORKING INDEX OF ELECTRIC ARC FURNACE	188
<i>Okedirán, K. I., Idris, M.O. and Adetunji, R.O.</i>	188
EVALUATION OF QUANTITY OF WATER SUPPLY IN MINNA METROPOLIS	198

<i>Illo , N.A and Busari A.O.,</i>	198
CARBON STORAGE IN CONCRETE: INFLUENCES OF HYDRATION STAGE, CARBONATION TIME AND AGGREGATE CHARACTERISTICS	209
<i>Abidoye, L.K. and Das, D.B.</i>	209
SEPTIC PLUME CONTAMINATIONS OF GROUNDWATER IN NIGERIA LOCAL COMMUNITY: INFLUENCES OF SEASONS AND TOPOGRAPHY ON PLUME MOBILIZATIONS	222
<i>Abidoye, L.K., Alabi, O.O. and Wahab, A.A.</i>	222
PARAMETRIC INVESTIGATION OF THE RELIABILITY OF ONE-WAY REINFORCED CONCRETE SLAB	234
<i>Olawale, S. O. A., Tijani, M. A. and Ogunleye, O. E.</i>	234
MULTINOMIAL LOGIT APPROACH TO MODELLING CRASH SEVERITY ON SELECTED TWO-LANE HIGHWAYS IN ONDO STATE NIGERIA	244
<i>Ipindola, O.O</i>	244
FACTORS INFLUENCING CORPORATE REAL ESTATE OUTSOURCING IN NIGERIA: AN EMPIRICAL STUDY FROM THE BANKING AND TELECOMMUNICATION SECTORS IN LAGOS, NIGERIA.	257
<i>Fayomi, I., Oladokun T.T. and Adewolu T.O.</i>	257
COMBINED INFLUENCE OF GRAVEL AND CRUSHED BURNT BRICKS ON THE PROPERTIES OF CONCRETE	273
<i>. Kareem, M.A, Olawale, S.O.A., Bamigboye, G.O., Alade A. J.</i>	273
GEOTECHNICAL INVESTIGATION OF THE SUITABILITY OF SOME SELECTED LATERITIC SOILS FOR ROAD CONSTRUCTION IN OSUN STATE	284
<i>Oluremi, J.R., Ishola, K., Yohanna, P. and Etim, R.K.</i>	284
ENHANCING TECHNO-ENVIRONMENTALISM AND UNIVERSITY ENTREPRENEURSHIP FOR DEVELOPMENT IN AFRICA: A POLYCENTRIC PLANNING PERSPECTIVE	296

<i>Akinola, S. R., Olayode, O., Abiola, T. I., Adeosun, J. O. and Adejumo, A. O.</i>	296
ASSESSMENT OF RELIABILITY OF A CONCRETE COLUMN RESISTING AXIAL AND A COMBINATION OF AXIAL AND MOMENT LOADS	317
<i>Olawale, S.O.A., Adebajo, A.U. and Tijani, A.O.</i>	317
ACOUSTIC BEHAVIOUR OF CRUMB-RUBBER MASONRY HOLLOW CONCRETE BLOCK “WALLETTE” BASED ON ITS INSTALLED SELF-WEIGHT	335
<i>Sanni, M.Y., Ocholi, A., Abdulkarim, A.A., Ejeh, S.P. and. Amartey, Y.D.</i>	335
EXPERIMENTAL STUDY ON THE PROPERTIES OF SORGHUM HUSK ASH PERVIOUS CONCRETE	351
<i>Tijani, M.A., Ajagbe, W.O., Olawale, S.O.A., Ganiyu, A.A. and Agbede, O.A.</i>	351
TRAFFIC ANALYSIS AT A MULTILEGED INTERSECTION IN OSUN STATE, NIGERIA	359
<i>Olawuyi, O.A., Busari, A., Akintayo, F.O, and Ojagbule, T.E.</i>	359
AN ASSESSMENT OF URBAN HOUSEHOLD OUTDOOR RECREATIONAL BEHAVIOURS IN OSOGBO, OSUN STATE, NIGERIA	370
<i>Adedotun, S.B., Yakubu, D.A., Ajayi, O.A., Adedotun, D.O. and Tewogbade, M.</i>	370
REDEFINING THE SCALE OF ENVIRONMENTAL POLLUTION IN NIGERIA USING SUSTAINABLE DEVELOPMENT GOALS	384
<i>Gbadegesin, O.A.</i>	384
APPRAISAL OF ENVIRONMENTAL SANITATION PRACTICES IN SELECTED MARKETS IN AKURE, NIGERIA	396
<i>Ibrahim, R. B., Adedotun, S. B., Waheed, F. I. and Akinbosoye, B.O.</i>	396
IMPACT ASSESSMENT OF SMOKING DURATION ON POLYCYCLIC AROMATIC HYDROCARBONS (PAH’S) CONTAMINATIONS OF CATFISH (<i>Clarias gariepinus</i>)	407
<i>Abiona, O. O., Awojide, S. H., Adegunwa, A. O. and Tayo, A. S</i>	407

ENVIRONMENTAL MANAGEMENT POLICIES IN NIGERIA	415
<i>Adewoye, O.A., Oyewole, O. D. and Lawal, O. O.</i>	415
ACCESSIBILITY AND PATRONAGE OF URBAN OPEN SPACES IN A SOUTH-WESTERN NIGERIA CITY.	424
<i>Ajayi, A.O. and Amole, O.O.</i>	424
MAPPING OF THE SUSCEPTIBILITY AREAS TO LANDSLIDE IN JOS SOUTH LOCAL GOVERNMENT AREA, PLATEAU STATE, NIGERIA.-GIS APPROACH	443
<i>Fadipe, O.O., Shitta, N. Okeke, O.J. Adeosun, J.O.</i>	443
A STUDY OF SPATIAL ACCESSIBILITY TO PUBLIC SECONDARY SCHOOL EDUCATION IN OSUN WEST SENATORIAL DISTRICT, NIGERIA	452
<i>Adeyinka, S.A.; Ojo, A.O., Olayode, O. and Ogundahunsi, D. S.</i>	452
THE INFLUENCE OF CRUMB-RUBBER ADDITIONS ON THE WATER SORPTIVITY AND POROSITY OF MASONRY CONCRETE	463
<i>Sanni, M.Y., Ocholi, A., Abdulkarim, A.A., Ejeh, S.P. and Amartey, Y.D.</i>	463
EVALUATION OF STRENGTH CLASSES OF TWO SELECTED LESS-USED NIGERIAN TIMBER SPECIES FOR STRUCTURAL APPLICATIONS	481
<i>Rahmon, R. O., Jimoh, A. A., Babatunde, O. Y.</i>	481
LAND USE CHANGES BETWEEN 1986 AND 2016 IN OBA HILL FOREST RESERVE, OSUN STATE, NIGERIA	499
<i>Asifat, J.T. and Ogunbode, T.O.</i>	499
EFFECT OF COMPACTIVE EFFORTS ON THE DESSICATION-INDUCED VOLUMETRIC SHRINKAGE OF BLACK COTTON SOIL TREATED WITH CASSAVA PEEL ASH	512
<i>Adeyemo, K. A., Yunusa, G. H., Bello, A. A. and Muhammad, A.</i>	512
EVALUATION OF THE EFFECT OF PRECIPITATION VARIATION ON GROUNDWATER QUALITY IN ILORIN METROPOLIS, NIGERIA	524

<i>Ayanshola, A.M., Sossou, P.M., Bilewu, S.O., Abdulkadri, T.S., Oluwaseun, V.O. and Owolabi, S.O.</i>	524
REMOTELY CONTROLLED CAR SPEED GOVERNOR	536
<i>Alonge, O.I., Abiola, O.A., Onigbogi, A.O., Akinbode, F.O., Okediji, A. P. and Alabi, I. O.</i>	536
STALL CONTROL ON THE NACA 23012 AIRFOIL VIA SINGLE AND DOUBLE SUCTION	550
<i>Alonge, O. I., Akinneye, A.O. and Julius, M. O.</i>	550
BUS STOPS CHARACTERISTICS IN SELECTED LOCAL GOVERNMENT AREAS IN IBADAN METROPOLIS	565
<i>Akintayo, F. O., Adibeli, S. A., Oyewale, P. K. and Olawuyi, O. A.</i>	565
THE USE OF BAGASSE ASH AS A SUITABLE RAW MATERIAL FOR PRODUCTION OF CONTAINER GLASS	573
<i>Muhammed, J.O. and Alemaka, E.M</i>	573
PRODUCTION OF A DUAL-PURPOSE WASTE GLASS PROCESSING MACHINE FOR SMALL TO MEDIUM ENTERPRISE (SME)	585
<i>Olasehinde, O. S., Gonah, C. M. and Fwatwmol, A. D..</i>	585
OPTIMAL PLACEMENT AND SIZING OF CAPACITOR IN NIGERIAN RADIAL DISTRIBUTION NETWORKS USING CUCKOO SEARCH ALGORITHM	596
<i>Salimon, S. A., Suuti, K. A. and Aderinko, H. A.</i>	596
DEVELOPMENT OF A DUST EXTRACTOR	610
<i>Adeboye, B. S. and Raji, A.W.</i>	610
HEALTH IMPAIRMENT OF CLIMATE CHANGE AMONG AGED PEOPLE IN IBADAN, NIGERIA	616
<i>Kehinde, O. J. and Adeboyejo, A. T.</i>	616

COMBATTING ENVIRONMENTAL BURDENS THROUGH ANAEROBIC DIGESTION OF SELECTED ANIMAL WASTES CO-DIGESTED WITH FOOD WASTES AT MESOPHILIC TEMPERATURE	627
<i>Oladejo, O.S., Salami, A. and Adebayo, A.O.</i>	627
OPTIMUM AND NUTRITIVE UTILIZATION OF <i>OREOCHROMIS NILOTICUS</i> FED DIFFERENTLY PREPARED HOUSEFLY MAGGOT SUBSTITUTED DIETS.	641
<i>Mustapha, A.K.</i>	641
GEOSPATIAL ANALYSIS OF URBAN HEAT ISLAND OVER BAUCHI METROPOLIS AND ITS ENVIRONS	655
<i>Isioye, O. A., Akomolafe, E. A., Abubakar, A. Z., Aliyu, A. O. and Maiwayo, T.</i>	655
MOTORISTS' COMPLIANCE WITH ROAD TRAFFIC SIGNS IN IKEJA LOCAL GOVERNMENT AREA, LAGOS STATE	670
<i>Ogundahunsi, D. S., Adedotun, S. B. and Usman, A. A.</i>	670
IMPACT OF ROAD EXPANSION ON THE SOCIO ECONOMIC ACTIVITIES IN OSOGBO METROPOLIS	678
<i>Yakubu, D. A., Adedotun, S. B. and David, O. J.</i>	678
COMPRESSIVE STRENGTH CHARACTERISTICS OF STRUCTURAL-SIZE AKOMU (<i>Pycnanthus angolensis</i>) AND ERIRI (<i>Vitex doniana</i>) AS TIMBER COLUMN UNDER COMPRESSION	688
<i>Rahmon, R. O. and Jimoh, A. A.</i>	688
VISCOUS FLOW EFFECT FOR SIMULTANEOUS SQUEEZE AND SLIP FLOW OF A POROUS EMBEDDED NON-NEWTONIAN FLUID.	706
<i>Ilegbusi, A.O. and Akinshilo, A.T.</i>	706
INNOVATING ENGINEERING STUDENT CURRICULUM WITH ENTREPRENEURSHIP	721
<i>Adeyemi, O.A. and. Idris, M.O.</i>	721

A REVIEW OF WOVEN NATURAL FIBRE COMPOSITE FOR SPIRAL ANKLE FOOT ORTHOSIS **734**

Oyewo, A., Ajide, O., Odusote, J., Adefajo, A. and Fakorede, D. **734**

DETERMINANTS OF PROPERTY INVESTMENT INFLOW IN AN EMERGING ECONOMY: THE PERSPECTIVE OF REAL ESTATE DEVELOPERS IN LAGOS, NIGERIA **747**

Adebara, O. B. and Olaleye, A. **747**

FRONT AND REAR YARDS OF RESIDENTIAL BUILDINGS AS OPEN SPACES IN ILE-IFE, NIGERIA: SOME IMPLICATIONS FOR DEVELOPMENT CONTROL **762**

Adebara, T. M. **762**

ROTOR ANGLE DYNAMICS IN MULTI-MACHINE GRID-INDEPENDENT DISTRICT MINIGRID **776**

Ajewole, T.O., Lawal, M.O., Alawode, K.O. and Omoigui, M.O. **776**

STUDY OF GLOBAL USE OF GEOSYNTHETICS TECHNOLOGY AND IMPLICATIONS FOR NIGERIA **785**

Oginni, F.A. and Dada, T. T. **785**

AN IMPROVED MATHEMATICAL MODEL FOR ECOLOGICAL SURVEILLANCE OF PREY-PREDATOR. **803**

Omotosho, L.O.; Olayiwola, M.O. and Olaleye, V.O. **803**

PURIFICATION AND PHYSICO-CHEMICAL ANALYSIS OF CRUDE GLYCERIN PRODUCED BY TRANSESTERIFICATION PROCESS. **816**

Aworanti, O.A., Agbede, O.O., Ogunleye, O.O., Agarry, S.E., Babatunde, K.A. and Akinwumi O.D. **816**

LABORATORY INVESTIGATION OF SEDIMENT TRANSPORT IN OPEN CHANNEL FLOWS **824**

Eya, S. A.; Saleh, J. Y.; Ekwo, J. E.; Nubiya, R. N. and Busari, O. A. **824**

CONVERGENCE BETWEEN THE MARXIST AND INFORMATION THEORY IN RELATION TO MOTIVE-BASED OCCLUSION-INVARIANT FACIAL DISPARITY: AN ANALYSIS OF CONFLICT RESOLUTION	834
<i>Alabi, A.</i>	834
DISTRIBUTION SYSTEM POWER LOSS MINIMIZATION BASED ON NETWORK STRUCTURAL CHARACTERISTICS	849
<i>Ayanlade, S.O.; Komolafe, O. A., Adejumobi, I. O. and Jimoh, A.</i>	849
SUSTAINABILITY OF IFE STEEL SLAG ON THE SPLIT AND FLEXURAL STRENGTHS OF CONCRETE	862
<i>Adedokun, S. I., Anifowose, M. A., Oyeleke, M. O., Oduoye, W. O., Ibiwoye, E. O.</i>	862
FACTORS INFLUENCING TIME PERFORMANCE OF CONTRACTORS ON CONSTRUCTION PROJECTS IN OSUN STATE, NIGERIA	870
<i>Ademola, S. A., Akomolafe, M. A. and Buari, T. A.</i>	870
Comparison of Physicochemical properties of two varieties of cucumber (<i>Cucumis sativus</i>)	885
<i>Lamidi, W.A., Oyedun, T. D. and Adesigbin, A.J.</i>	885
A PARTICLE SWARM OPTIMIZATION (PSO) BASED SMART GRID APPLICATION FOR OPTIMUM SIZING OF HYBRID RENEWABLE ENERGY SYSTEMS IN NIGERIA	899
<i>Oyelami, S., Azeez, N. A. and Ologunye, O. B.</i>	899
APPRAISAL OF FLOODING AND DRAINAGE CONDITIONS IN OSOGBO, OSUN STATE, NIGERIA.	907
<i>Gasu, M. B., Olaiyiwola, O. and Ezekiel, A. O.</i>	907
DECENTRALIZED LOAD FREQUENCY CONTROL OF MULTI-AREA INTERCONNECTED POWER SYSTEMS	920
<i>Yahaya, E. H., Kunya, A. B., Jibril, Y., Okorie, P. U.</i>	920

COMBINED INFLUENCE OF GRAVEL AND CRUSHED BURNT BRICKS ON THE PROPERTIES OF CONCRETE

. Kareem, M.A.^{1*}, Olawale, S.O.A.¹, Bamigboye, G.O.², Alade A. J.¹

¹Department of Civil Engineering, Osun State University, Osogbo, Nigeria.

²Department of Civil Engineering, Covenant University, Ota, Nigeria.

*Email of Corresponding Author: mutiu.kareem@uniosun.edu.ng

ABSTRACT

The quest for alternative materials in concrete production is ongoing as the demand for concrete using conventional material increases. This study investigates the properties of concrete produced with Crushed Burnt Bricks (CBB) as replacement for Unwashed Gravel (UG). Concrete mixes of 1:2:4 (cement, sand and gravel) mix ratio were produced using UG/CBB combination in varying proportion of 100:0, 75:25, 50:50, 25:75, 0:100 which were represented as sample A, B, C, D and E. The water-to-binder (w/b) ratio of 0.4, 0.5, 0.55 and 0.6 were used for each sample. Sample A without CBB (i.e. 100% UG) served as control. Slump test was carried out on the fresh concrete while compressive strength test was carried out on the hardened concrete specimens using 150 mm cubes at the curing in ages of 7, 14 and 28 days, respectively. The slump values of fresh concrete increases with increase in w/b and CBB contents. At 28 days, the compressive strength values were 26.7 N/mm² for concrete produced with sample B at w/b of 0.4 and 28.2 N/mm² for concrete produced with sample A (control). It was concluded that the optimum level of substitution of 25% CBB for gravel is viable for concrete production from a structural point of view.

Keywords: Compressive strength, Concrete, Crushed burnt brick, Unwashed gravel, Water-to-binder ratio,

1.0 INTRODUCTION

Concrete is a composite material that consists of cement, fine aggregate coarse aggregate and water with or without admixture (Bamigboye *et al.*, 2019). Concrete's versatility, durability, and economy have made it the world's most used construction material (Kosmatka *et al.*, 2003). The properties of concrete are influenced by many factors which include the properties of aggregate used in the concrete, their sizes and texture, whether angular or sub- angular, other factors include the type of cement used, the water-cement ratio used, the method of mixing and curing, relative humidity and temperature. These factors must be adequately controlled to ensure that the desired properties of the concrete are obtained (Jimoh and Awe, 2007).

Aggregates occupy 70-80 per cent of the volume of concrete; hence, their impact on various characteristics of concrete cannot be underestimated (Neville, 2011). Aggregates are presumably inert mineral fillers such as crushed rock, gravel and sand for making concrete. It has been established that some of the aggregates exhibit chemical bond at the interface of aggregates and paste (Shetty, 2005). Aggregates are cheaper than cement; hence they are employed to the maximum advantage in concrete production. Aggregates can be classified as natural and artificial aggregates. Examples of natural aggregates include sand, gravel, crushed rock such as granite, quartzite, basalt while artificial aggregates include broken bricks, air-cooled slag, sintered fly ash, bloated clay (Yang and Huang, 1996). Gravel is one of the naturally occurring aggregates which has been used over the time for structural concrete construction as an alternative to granite, believing that it is either using granite alone or the mixture of the two coarse aggregates (granite and gravel) in a designed proportion can give the required strength and durability (Bamigboye *et al.*, 2016).

The cost of the provision of affordable housing depends largely on the price of the construction material. As a result of the high cost of cement and aggregates for the production of concrete, efforts have been made by many researchers (Khalaf, 2006; Rashid *et al.*, 2008; Apebo and Agunwanba, 2014; Bazaz and Khayat, 2012; Kulkarni and Momin, 2015; Raheem and Kareem, 2017a,b) in finding ways of reducing the cost of its production. This is achieved by finding alternative ways to reduce the cost of cement and coarse aggregates. The most commonly used coarse aggregates in concrete production in residential housing by low-income earner in Nigeria is gravel. This is due to the high cost of granite and the availability of abundant gravel

at a relatively lower cost in most areas of the country. Moreso, the availability and proximity of aggregate to the construction site also affect the cost of construction taking away the infrastructural development out of reach of the common man. Over the past decades, the cost of gravel has continued to increase owing to the cost of transporting gravel to the construction site and this factor tends to increase the cost of construction (European Environmental Agency, 2008). This necessitates the use of natural or manufactured material as an alternative to gravel in concrete production.

Debieb and Kenai (2008) investigated the properties of concrete with crushed bricks as a partial replacement for fine aggregates. Concrete with 25% crushed brick contents showed better properties that are comparable to that of the control specimen. Kanchiduria *et al.* (2017) studied the strength and durability of concrete produced with partial substitution of granite with over burnt brickbat wastes and concluded that 25 to 50% replacement was suitable for normal and mass concrete production. Rekha and Potharaju (2016) analysed the properties of concrete produced with recycled brick and granite. The results indicate that the crushed clay bricks are suitable for the replacement of the granite aggregate in concrete production. Similarly, Otoko (2014) used the crushed clay bricks as aggregate in bituminous mixtures for the production of asphalt concrete. The results showed that asphalt concrete of unused and recycled brick aggregate outperformed specimens made with granite aggregates, mainly because of the high porosity and roughness of the surface of crushed clay brick aggregates, which can absorb more bitumen and provide better bonding in asphalt concrete.

Several studies (Rashid *et al.*, 2008; Khalaf, 2006; Apebo and Agunwanba, 2014; Bazaz and Khayat, 2012; Kulkarni and Momin, 2015) have used crushed bricks as coarse aggregates in making concrete. Other studies have used crushed brick as a partial replacement for crushed stone (Rashid *et al.*, 2012; Nordin, 2014; Debieb and Kenai, 2008; Kanchiduria *et al.*, 2017; Rekha, 2016) and river gravel (Apebo *et al.*, 2013). In this study, the workability and compressive strength of concrete produced by the combined use of UG and CBB was investigated.

2.0 MATERIALS AND METHODS

Materials

The UG and river sand used in this study were obtained from borrow pits in Ibadan, Oyo State. CBB samples were collected from the bricks production site at Foyer Bricks, Ofatedo area of Osogbo Local Government Area, Osogbo, Osun State. The Aggregates used in this study is shown in Figure 1. Elephant Brand of ordinary Portland cement of 32.5 grade which conforms to BS 12 (1996) was purchased from a retail shop within Ibadan and used as a binding agent. Water used for mixing was collected from the tap at the Concrete Laboratory of the University of Ibadan, Ibadan, Oyo State Nigeria. Figure 2 shows the grading curves for UG, CBB and river sand.

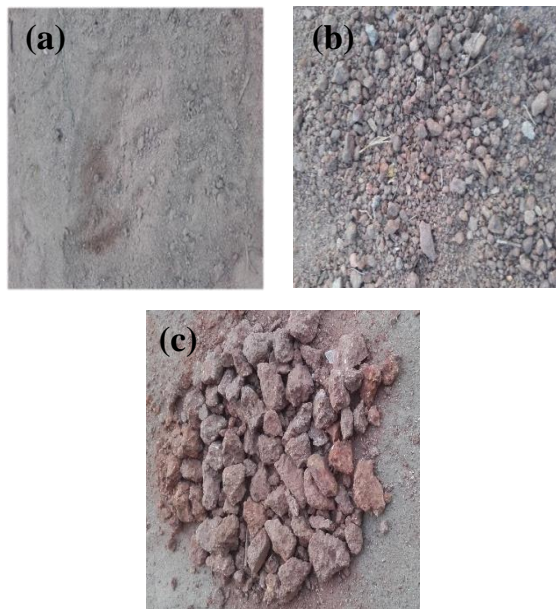


Figure 1: Aggregates used (a) River sand (b) UG (c) CBB

Sample Preparation

Concrete of 1:2:4 (cement, sand and gravel) mix proportions were prepared in conformity with BS 1881-125 (1986). The coarse aggregate content of the concrete mixture contained the mixture of UG and CBB in varying proportion of 100:0, 75:25, 50:50, 25:75, 0:100 which were represented as sample A, B, C, D and E. The w/b of 0.4, 0.5, 0.55 and 0.6 were used for each sample.

Sample A without CBB (i.e. 100% gravel) served as control. Table 1 shows the mix proportion for the preparation of 1 m³ concrete mix in terms of the weight of the components. A total

number of 144 concrete cubes of 150 mm size were produced for all the batches of concrete mixes. After casting, the specimens were stored in the Laboratory at 27 ± 5 °C with 90% relative humidity for 24 hours and then demoulded and cured underwater until testing ages.

The above mix was repeated for water-cement ratio of 0.5 (150 kg), 0.55 (165 kg) and 0.6 (180 kg), respectively.

Table 1: Mix Proportion used for concrete mix (0.4 W/C)

Sample ID	UG/CBB Combination (%)	Cement (Kg)	Sand (kg)	Coarse Aggregates (kg)		Water (kg)
				UG	CBB	
A	100/0	300	600	1200	0	120
B	75/25	300	600	900	300	120
C	50/50	300	600	600	600	120
D	25/75	300	600	300	900	120
E	0/100	300	600	0	1200	120

Testing on Concrete

Slump test was carried out on fresh concrete in accordance with BS 1881: Part 102 (1983) to determine the effect of CBB on the workability of concrete and compressive strength test was carried out on the hardened concrete specimens at the curing in ages of 7, 14 and 28 days, respectively. These tests were carried out at the Concrete Laboratory of the University of Ibadan, Ibadan, Oyo State Nigeria

3.0 RESULTS AND DISCUSSION

Workability

The result of slump indicating the workability of concrete mixes with different combinations of UG and CBB are presented in Table 2. The Table indicates that the concrete slump decreases as the CBB content increases and increases as the water/cement ratio increases.

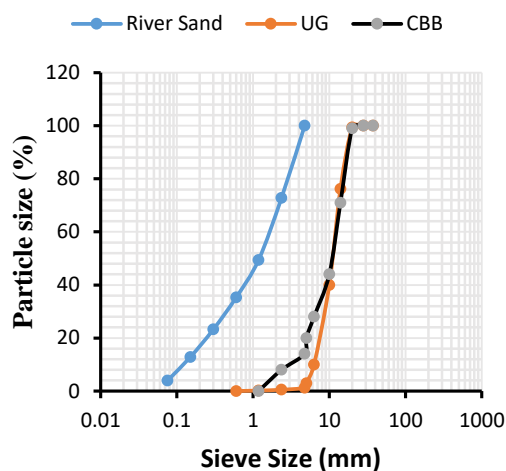


Figure 2: Particle size distribution of the aggregates used

The reduction in slump is attributed to the change in particle shape and nature of aggregates when CBB replaced UG (El-hassan and Kianmehr, 2019). The dust content can also cause reduction in workability (Keseđić *et al.*, 2008).

Table 2: Slump values of fresh concrete mixes

Sample ID	Water/Cement Ratio	Slump (mm)
A	0.40	0
	0.50	40
	0.55	55
	0.60	70
B	0.40	10
	0.50	30
	0.55	45
	0.60	60
C	0.40	0
	0.50	9
	0.55	20
	0.60	50

D	0.40	0
	0.50	5
	0.55	10
	0.60	30
E	0.40	0
	0.50	0
	0.55	5
	0.60	15

Compressive

strength

The results of the compressive strength of concrete with different combinations of UG and CBB at the curing ages of 7, 14 and 28 days are presented in Figs. 3-5, respectively. The Figures generally showed that the compressive strength increases as the curing ages increases.

The result at 7 days as presented in Figure 3 indicate that the compressive strength of the concrete decreases with increase in CBB content and w/b ratio. The highest compressive strength was observed for concrete produced with Sample A (control) and w/b of 0.40 while the lowest was recorded for concrete produced with Sample E and w/b of 0.6. Nonetheless, the compressive strength values of concrete produced with different combinations of UG/CBB are lower compared to the control, a similar trend of decrease in compressive strength was observed as that of the control.

A similar trend was observed at 14 days as presented in Figure 4. This indicates an increasing rate of substitution of UG with CBB generally decreases the compressive strength of the concrete. Such characteristic is attributed to the higher water absorption of recycled crushed brick compared to natural aggregates (Kesegić, 2008).

The results for 28 days as presented in Fig. 2 also followed the same trend with the compressive strength ranging from 15.4 to 28.2 N/mm² for concrete produced with samples A

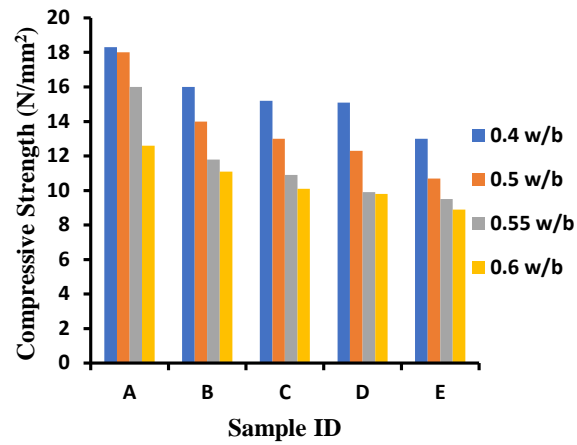


Figure 3: Compressive strength of UG/CBB concrete at 7 days curing age

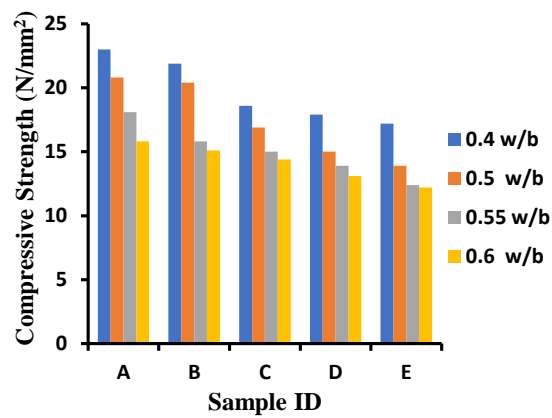


Figure 4: Compressive strength of UG/CBB concrete at 14 days curing age

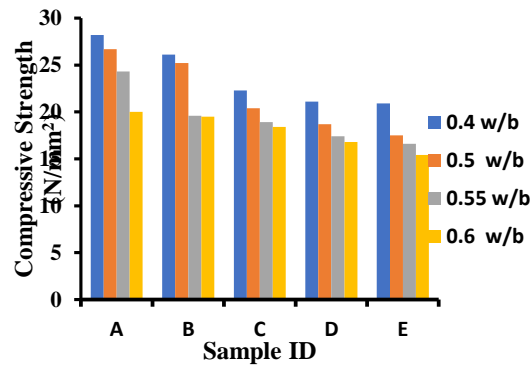


Figure 5: Compressive strength of UG/CBB concrete at 28 days curing age

to E as the CBB contents in UG increased from 0% to 100%. These values are lower compared to the values obtained from previous studies (Bhattacharjee *et al.*, 2011; Rashid *et al.*, 2009 and Apebo *et al.*, 2013) and this is attributed to the use of unwashed gravel as against the washed and granite. The compressive strength values of concrete containing the UG/CBB combination are generally lower compared to the control with the same w/b ratio. This is in agreement with the findings from previous studies (Bhattacharjee *et al.*, 2011; Rashid *et al.*, 2009 and Apebo *et al.*, 2013). Meanwhile, the highest compressive strength was observed for concrete produced with Sample B with 25% CBB content for the entire w/b ratio considered compared to samples with higher CBB content. About 87%, 82%, 74% and 88% of the control was developed by concrete produced with Sample B with the same water/cement ratio and curing ages.

4.0 CONCLUSIONS

From the results of the tests performed on the concrete, the following conclusions were drawn.

1. The concrete slump increases with increase in CBB content and decrease in UG content.
2. Increase in w/b ratio of concrete results in an increase in concrete slump.
3. The compressive strength of concrete decreases with increase in w/b ratio and CBB content in UG.
4. Concrete with 75% UG and 25% CBB content for all the w/b ratio considered attained the optimum compressive strength which is closer to the control with the same w/b ratio.
5. Concrete with the proportions of 75% UG and 25% CBB with 0.4 w/b ratio is suitable for producing concrete for non-load bearing structural applications.

REFERENCES

- Apebo, N.S. and Agunwambe J., 2014. The suitability of crushed over burnt brick as coarse aggregate, *International Journal of Engineering Science and Innovation Technology*, 3(1). pp. 316-321.
- Apebo, N.S., Iorwua, M.B. and Agunwamba, J. C., 2013. Comparative analysis of the compressive strength of concrete with gravel and crushed over burnt bricks as coarse aggregates, *Nigerian Journal of Technology*, 32(1), pp.7-12.
- Bamigboye, G.O., Adedeji, A.A., Olukanni, D.O., Omoleye, J.A. and Jolayemi, J.K. 2019. Influence of granite-gravel combination on the strength of self-compacting concrete:

- Toward a suitable construction material, *Journal of Engineering Science and Technology*, 14(7), pp. 2746-2760.
- Bamigboye, G.O., Ede, A.N., Raheem, A.A., Olofinnade, O.M. and Okorie, U., 2016. Economic exploitation of gravel in place of granite in concrete production, *Material Science Forum*, 866, pp. 73-77.
- Bazaz, J.B. and Khayat, M., 2012. Properties and performance of concrete made with recycled low quality crushed brick, *Journal of Material in Civil Engineering*, 24, pp. 164-175.
- Bhattacharjee, E., Nag, D., Sarkar, P. P. and Haldar, L., 2011. An experimental investigation of properties of crushed over burnt brick aggregate concrete, *International Journal of Engineering Research and Technology*, 4(1), pp. 21-30.
- BS 12, 1996. Specification for Portland Cement”, London, British Stand Institution.
- BS 1881-125, 1986. Method of mixing and sampling fresh concrete in the laboratory, London, British Stand Institution.
- Debieb, F. and Kenai, S., 2008. The use of coarse and fine crushed bricks as aggregate in concrete, *Construction and Building Materials*, 22, pp. 886–893.
- El-Hassan, H. and Kianmehr, P., 2019. Influence of recycled concrete aggregates and slag on the performance of pervious concrete. *Proceeding of the 4th World Congress on Civil, Structural and Environmental Engineering (CSEE' 19)*, No. ICSECT 124, April 7 - 9, 2019, Rome, Italy. DOI: 10.11159/icsect19.124.
- European Environmental Agency, 2008. Effectiveness of environmental taxes and charges for managing sand, gravel and rock extraction in selected EU countries, Copenhagen. DOI: 10.2800/35981.
- Jimoh, A. A. and Awe, S. S., 2007. A study on the influence of aggregate size and type on the compressive strength of concrete, *Journal of Research Information in Civil Engineering*, 4(2), pp. 157–168.
- Kanchidurai, S., Bharani, G. and Mohan, K., 2017. Strength and durability studies on concrete with partial replacement over burnt brick bat waste, *IOP Conf. Series: Earth and Environmental Science*, 8, pp. 1-9. DOI:10.1088/1755-1315/80/1/012018.
- Kesegić, I., Netinger, I. and Bjegović, D., 2008. Recycled brick as an aggregate for concrete: Overview, *Technical Gazette*, 15(3), pp. 34-35.
- Khalaf, F.M., 2006. Using crushed clay brick as coarse aggregates in concrete. *ASCE*. 18(4). pp. 518-526.

- Kosmatka, S.H., Kerkhoff, B. and Panarese, W.C., 2003. Design and control of concrete mixtures, EB001, 14th edition, Portland Cement Association, Skokie, Illinois, USA.
- Kulkarni, S. Momin, A.A., 2015. Experimental study on the strength properties of concrete using brick aggregates, *International Journal of Advance Engineering and Research Development*, 2(1). Pp. 129-139.
- Otoko, G.O., 2014. Use of crushed clay bricks as aggregate in concrete, *International Journal of Engineering and Technology Research*, 2(4), pp. 1-9.
- Neville, A.M., 2011. Properties of concrete performance, 5th edition. Essex, England: Pearson Education Limited.
- Nordin, N., 2014. The use of brick waste as coarse aggregates partial replacement in concrete production”, An unpublished B.Eng. Thesis, Faculty of Civil Engineering and Earth Resources, Universiti Malaysia Pahang.
- Raheem, A.A. and Kareem, M.A., 2017a. Optimal raw material mix for the production of rice husk ash blended cement, *International Journal of Sustainable Construction Engineering and Technology*, 7(2), pp. 77-93.
- Raheem, A.A. and Kareem, M.A., 2017b. Chemical composition and physical characteristics of rice husk ash blended Cement, *International Journal of Engineering in Africa*, pp. 25-35, DOI: 10.4028/www.scientific.net/JERA.32.25
- Rashid, M.A., Salam, M.A., Shill, S.K. and Hasan, M.K., 2012. Effect of replacing natural coarse aggregate by brick aggregate on the properties of concrete, *DUET Journal*, 1(3), pp. 17-22.
- Rashid, M.A., Hossain, T. and Islam, M.A., 2008. Higher strength concrete using crushed brick as coarse aggregate, 82(10), pp. 18-23.
- Rekha, K. and Potharaju, M., 2016. Usage of recycled brick as coarse aggregate in concrete, *International Advanced Research Journal in Science, Engineering and Technology*, 3(9), pp. 95-100. DOI: 10.17148/IARJSET.2016.3918.
- Shetty, M.S., 2005. Concrete Technology, (Revised Edition), Ram Nagar, New Delhi, S.Chand.
- Yang, C.C. and Huang, R., 1996. A two-phase model for predicting the compressive strength of concrete, *Cement and Concrete Research*, 26(10), pp. 1567-1577.