



ELSEVIER

Contents lists available at ScienceDirect

MethodsX

journal homepage: [www.elsevier.com/locate/mex](http://www.elsevier.com/locate/mex)

## Method Article

# Radioactivity and radiological hazards from a kaolin mining field in Ifonyintedo, Nigeria

T.A. Adagunodo<sup>a,\*</sup>, A.I. George<sup>a</sup>, I.A. Ojoawo<sup>b</sup>, K. Ojesanmi<sup>c</sup>,  
R. Ravisankar<sup>d</sup>

<sup>a</sup> Department of Physics, Covenant University, Ota, Ogun State, Nigeria

<sup>b</sup> Department of Physics, University of Ibadan, Ibadan, Oyo State, Nigeria

<sup>c</sup> Department of Chemistry, Covenant University, Ota, Ogun State, Nigeria

<sup>d</sup> Post Graduate and Research Department of Physics, Government Arts College, Tiruvanmalai 606603, Tamilnadu, India

## A B S T R A C T

The concentrations of the radionuclides in the subsurface formation (soils and rocks) solely depend on their geological origin, which enables its variation from point to point on the Crust. Construction materials can possess elevated concentrations of radioactivity if their byproducts are mined from contaminated radionuclide sources. In this article, results of in situ measurements of radioactivity concentrations of <sup>40</sup>K, <sup>232</sup>Th, and <sup>238</sup>U as well as gamma doses and radiological hazards from kaolin mining field were presented and evaluated. Eleven stations were randomly occupied in order to cover the upper axis of a kaolin mining field in Ifonyintedo. The radiometric survey was achieved using Super-Spec (RS-125), equipment capable of measuring activity concentrations and gamma doses. For each location, measurements were taken four times, while its mean and standard deviation values were estimated for better accuracy. The overall mean activity concentrations (for <sup>40</sup>K, <sup>232</sup>Th and <sup>238</sup>U) and gamma dose were estimated as 93.9 Bq kg<sup>-1</sup>, 65.1 Bq kg<sup>-1</sup>, 38.2 Bq kg<sup>-1</sup>, and 59.6 nGy h<sup>-1</sup> respectively. The estimated radiological hazards from the measured parameters showed that the overall mean concentrations of Radium Equivalent, External and Internal Hazards, Annual Effective Dose, Gamma and Alpha Indices, and Representative Level index are 138.5 Bq kg<sup>-1</sup>, 0.37, 0.48, 0.29 mSv yr<sup>-1</sup>, 0.48, 0.19, and 0.97 respectively. By comparing the mean values of the activity concentrations and their radiological risks with the several world standards from the literature, kaolin deposits in Ifonyintedo are highly rich in thorium.

© 2018 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

## A R T I C L E I N F O

**Keywords:** Kaolin, Ceramic raw materials, Ifonyintedo, Dahomey Basin, Radioactivity, Radiological hazards, Miners

**Article history:** Received 19 February 2018; Accepted 13 April 2018; Available online 16 April 2018

\* Corresponding author.

E-mail address: [theophilus.adagunodo@covenantuniversity.edu.ng](mailto:theophilus.adagunodo@covenantuniversity.edu.ng) (T.A. Adagunodo).

## Method details

Kaolin is one of the types of clay found in nature, with the chemical composition of  $\text{Al}_2\text{Si}_2\text{O}_5(\text{OH})_4$  [1]. The name “kaolin” is derived from a Chinese word Gaoling, which literally mean “High Ridge”. The industrial usefulness of kaolinite clays can be found in paper industry [2], paint industry (as filler for paint), rubber and plastic industry [3], and construction industry [4]. They are used in the production of ceramics, cement, porcelain and bricks [5], toothpaste, food additive, and cosmetics [6]. Kaolinite clay also found its application in agricultural domain (production of spray that repel insects and avert sun burn) and medicine [6]. Recent study from Turkey showed that Kaolin clays are cost effect when used as pozzolanic additives in cement and concrete [7].

Ceramic raw materials are categorized into plastic and non-plastic ceramics. The former are materials that exhibit plasticity property when mixed with water, which include kaoline, bentonite and clay. The later are materials that are not plastic when mixed with water, which include feldspar, quartz, dolomite, limestone, magnesite, talc and calcium phosphate [8]. The main component in ceramic tile body is clay. Clay is a term for naturally occurring mineral aggregates consisting mainly of the hydrous silicate of alumina. Tile is a thin rectangular or square slab of baked clay used in overlapping rows for covering floor, wall column, or and roof. Geologically, kaolin is a result produced when feldspar crystals and feldspar are mixed together under the control of weathering [9]. As stated on the website of Ceramic Research Company [8], weathering is a wearing down of all exposed rock body that is frequently breaking down to sea level by actions such as water, glacial or wind. It is either a mechanical or physical process.

Globally, elevation of activity concentrations of radionuclide and its radiological consequences from buildings as well as building materials from geological origin have been reported by many researchers, among are: Lu et al. [10], Arabi et al. [11], Ge and Zhang [12], and Isinkaye et al. [13]. Recently, activity assessment and radiological risks associated with tiles made in Nigeria have been reported by Joel et al. [14] and Joel et al. [15]. Their results showed elevated concentrations of radionuclides in different tiles manufactured in Nigeria. Their outcome has facilitated this research in order to evaluate the radionuclide concentrations of one of the major kaolin deposits used for manufacturing of tiles in Nigeria. However, the aim of this research is to assess the concentrations of radioactivity on a kaolin mining field in Ifonyintedo, Nigeria and to estimate the radiological risks to human exposure.

## The study area and its geology

Kaolin is one of the mineral resources that are available in commercial quantity in Nigeria. Ifonyintedo, the study area is one of the several locations where kaolin clays are mined in Nigerian sedimentary Basins. The study area is bounded by longitude  $002^\circ 47.498'$  to  $002^\circ 47.570'$  E and latitude  $006^\circ 46.077'$  to  $002^\circ 46.126'$  N, located in the eastern arm of Dahomey Basin, Nigeria. The elevation above the sea level ranged from 86 to 91 m, with an average of 89 m. Fig. 1a is the representation of how the kaolin clays are mined in Ifonyintedo, Nigeria. Ifonyintedo is a town located in Idiroko local council development area, Ipokia local government area, Ogun state, SW Nigeria. The town has a population of approximately 10, 000. The residents along Ifonyintedo axis are into farming and cottage industry. The major cultivated crops in Ifonyintedo include: cassava, maize, vegetable, and cash crop such as palm tree. The major cottage industries are cassava and palm oil industries. Recently, the discovery of kaolin deposits in commercial quantity has attracted the miners to the town. Commercial activities in Ifonyintedo have been improved greatly, due to its propinquity to the Republic of Benin's border. Like other suburbs of the study area, Ifonyintedo has a tropical climate, with distinct two seasons: rainy and dry seasons. Averagely, the rainy season span from March to November, while the dry season fluctuates from November to March, except on some minor cases where the rainfall is scarcely experienced between December and January. The mean temperature of the study is  $26.5^\circ\text{C}$ . Additional information on Ifonyintedo is available on [1].

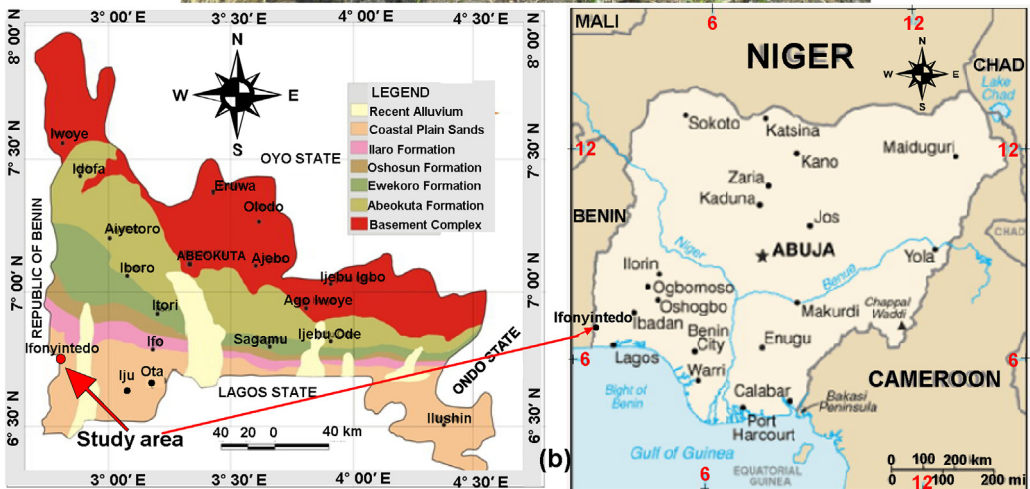


Fig. 1. (a) Kaolin mining in Ifonyintedo; (b) Geological domains of Ogun state, Nigeria revealing Ifonyintedo.

Nigeria is on the Pan-African mobile belt, which separates Congo Cratons and West Africa [16]. In Nigeria, the two pronouncing geology are the Basement rocks and sedimentary Basins. From the literature, few works from both of the terrains could be found in Refs. [17–23]. Ifonyintedo is directly seated on the Eastern region of Dahomey Basin, which is one of the Nigerian Basins. This Basin is situated in SW region of Nigeria, which is separated from the prolific Niger Delta Basin by Okitipupa Ridge. Its depositional constituents are grouped into six classes, these are: Benin, Abeokuta, Oshosun, Akinbo, Ilaro and Ewekoro Formations. The descriptions of these classes have been presented by Adagunodo et al. [1]. The Hydrogeology of Dahomey basin comprises Ogun River and Owena basin. Fig. 1b is the diagrammatic representation of the geological domains in Ogun state revealing the study area.

## Materials and methods

In situ measurements of activity concentrations of K-40, Th-232, U-238 and the gamma dose rates were taken over kaolin deposits in Ifonyintedo, Dahomey Basin, SW Nigeria. The data were randomly occupied at the upper axis of the field from eleven (11) locations using a hand-held detector known as

**Table 1**

Measured concentrations of radionuclides and the absorbed dose rates from the upper axis of kaolin deposits in Ifonyintedo.

| Sample         | U-238<br>(Bq/kg) | Th-232<br>(Bq/kg) | K-40<br>(Bq/kg) | Dose rate<br>(nGy/hr) | Longitude                         | Latitude                          | Elev. (m) |
|----------------|------------------|-------------------|-----------------|-----------------------|-----------------------------------|-----------------------------------|-----------|
| UA1            | 22.23 ± 0.02     | 98.25 ± 0.11      | 125.2 ± 0.90    | 73.77 ± 1.80          | 002° 47.516' E                    | 006° 46.077' N                    | 87        |
| UA2            | 18.53 ± 0.02     | 69.02 ± 0.25      | 156.5 ± 0.12    | 55.95 ± 0.65          | 002° 47.500' E                    | 006° 46.091' N                    | 91        |
| UA3            | 39.52 ± 0.02     | 60.90 ± 0.30      | 93.9 ± 0.86     | 57.63 ± 1.45          | 002° 47.503' E                    | 006° 46.095' N                    | 90        |
| UA4            | 55.58 ± 0.01     | 66.18 ± 0.15      | 31.3 ± 5.40     | 65.18 ± 2.99          | 002° 47.498' E                    | 006° 46.099' N                    | 88        |
| UA5            | 48.17 ± 0.02     | 61.71 ± 0.20      | 125.2 ± 2.30    | 63.19 ± 0.65          | 002° 47.505' E                    | 006° 46.102' N                    | 87        |
| UA6            | 43.23 ± 0.02     | 58.87 ± 0.15      | 31.3 ± 0.50     | 55.41 ± 1.84          | 002° 47.570' E                    | 006° 46.109' N                    | 89        |
| UA7            | 64.22 ± 0.03     | 64.55 ± 0.16      | 62.6 ± 1.49     | 69.28 ± 0.30          | 002° 47.513' E                    | 006° 46.114' N                    | 88        |
| UA8            | 43.23 ± 0.02     | 48.72 ± 0.15      | 93.9 ± 3.28     | 51.95 ± 1.56          | 002° 47.503' E                    | 006° 46.117' N                    | 91        |
| UA9            | 19.76 ± 0.01     | 62.12 ± 0.29      | 125.2 ± 1.24    | 51.04 ± 2.18          | 002° 47.504' E                    | 006° 46.120' N                    | 90        |
| UA10           | 43.23 ± 0.01     | 56.03 ± 0.13      | 125.2 ± 2.58    | 57.63 ± 0.20          | 002° 47.514' E                    | 006° 46.123' N                    | 89        |
| UA11           | 22.23 ± 0.01     | 69.83 ± 0.20      | 62.6 ± 1.69     | 54.13 ± 3.63          | 002° 47.517' E                    | 006° 46.126' N                    | 86        |
| Range          | 18.5 – 64.2      | 48.7 – 98.3       | 31.3 – 156.5    | 51.04–73.77           | 002° 47.498' E<br>–002° 47.570' E | 006° 46.077' N<br>–006° 46.126' N | 86 – 91   |
| Overall mean   | 38.17            | 65.11             | 93.90           | 59.56                 | –                                 | –                                 | 89        |
| Global average |                  |                   |                 |                       |                                   |                                   |           |
| [28]           | 50               | 50                | 500             | 55                    | –                                 | –                                 | –         |
| [29]           | 50               | 50                | 500             | 55                    | –                                 | –                                 | –         |
| [30]           | 50               | 50                | 670             | 50                    | –                                 | –                                 | –         |
| [31]           | 32               | 45                | 420             | 84                    | –                                 | –                                 | –         |

Super-Spec (RS 125). The coordinate and elevation of each location were determined with the aid of global positioning system (GPSMAP 78). The radioactivity measurements were taken four times at each location while their averages and standard deviations were estimated in order to ensure accuracy. All the measured parameters are shown in Table 1. The radiometric survey was carried out in the month of January 2018. The detector used was manufactured by Canadian Geophysical Institute. It has high accuracy with probable measurement errors of about 5%. It offers an integrated design with a large detector, direct assay readout, data storage and high sensitivity. The assay mode of RS-125 Super SPEC provides sample concentration analysis with direct data display of potassium (K) in percentage (%), uranium (U) in part per million (ppm) and thorium (Th) in part per million (ppm). The spectrometer is calibrated on 1 × 1 m test pads, which utilizes 5 min spectra accumulation on potassium, thorium and uranium pads and 10 min accumulation on the Background (BG) pad as calibrated by Canadian Geophysical Institute. It uses sodium iodide (NaI) crystal doped with thallium [Tl] as activator. The approximate linear energy of the detector falls between 0.80 and 1.2 MeV, this range covers the majority of significant gamma-ray emissions from terrestrial sources. The detection of gamma-ray from cosmic ray is negligible due to the detector's low response to high-energy gamma radiation. The full count of 120 s per assay was adopted for best accuracy as stated in Radiation Solutions Inc. [24]. The recorded activity concentrations of K-40, Th-232, U-238 from the detector were converted to Becquerel per kilogram (Bq kg<sup>-1</sup>) in accordance with the conversion factor of International Atomic Energy Agency [25,26]. The advantage of in situ radiation measurement method over ex situ is that, the measurements are faster; less costly; greater data points can be measured; more than two measurements per station can be achieved, which minimizes the uncertainty on the mean of radioactivity concentrations [27]. Calibration pad for Super-Spec (RS-125) according to Canadian Geophysical Institute is presented in Eqs. (1)–(3).

$$Q00 - K - \text{pad} - \% \text{ of K} = 8.71 \text{ for RSI} \quad (1)$$

$$Q11 - U - \text{pad} - eU \text{ ppm} = 52.9 \text{ for RSI} \quad (2)$$

$$Q22 - Th - \text{pad} - eTh \text{ ppm} = 136.0 \text{ for RSI} \quad (3)$$

## Method descriptions

### Measured radionuclides and gamma dose

The mean and standard deviation of the measured radionuclides ( $^{238}\text{U}$ ,  $^{232}\text{Th}$  and  $^{40}\text{K}$ ) and gamma Dose Rates (DR) per station from the upper axis of kaolin deposits in Ifonyintedo are revealed in [Table 1](#). The highest recorded values for  $^{238}\text{U}$ ,  $^{232}\text{Th}$ ,  $^{40}\text{K}$  and DR are  $64.22 \pm 0.03 \text{ Bq kg}^{-1}$ ,  $98.25 \pm 0.11 \text{ Bq kg}^{-1}$ ,  $156.5 \pm 0.12 \text{ Bq kg}^{-1}$ , and  $73.77 \pm 1.80 \text{ nGy h}^{-1}$ , respectively, while the least recorded values for the same radionuclides and DR are  $18.53 \pm 0.02 \text{ Bq kg}^{-1}$ ,  $48.72 \pm 0.15 \text{ Bq kg}^{-1}$ ,  $31.3 \pm 0.50 \text{ Bq kg}^{-1}$  and  $51.04 \pm 2.18 \text{ nGy h}^{-1}$  respectively. The overall mean values were estimated as  $38.17 \text{ Bq kg}^{-1}$ ,  $65.11 \text{ Bq kg}^{-1}$ ,  $93.90 \text{ Bq kg}^{-1}$  and  $59.56 \text{ nGy h}^{-1}$  in the same order for the radionuclides and DR respectively. The global averages from four standards were compared with the overall mean as revealed in [Table 1](#). The NEA-OECD [28] and UNSCEAR [29] standards revealed that  $^{238}\text{U}$  and  $^{40}\text{K}$  were below the community weighted values of 50 and 500  $\text{Bq kg}^{-1}$  respectively. The overall mean values of  $^{232}\text{Th}$  and DR showed that they were above the permissible limits of 50  $\text{Bq kg}^{-1}$  and 55  $\text{nGy h}^{-1}$  by the factor of 1.3 and 1.1 respectively. The EC [30] standard revealed that the overall mean values of  $^{238}\text{U}$  and  $^{40}\text{K}$  were below the community weighted values of 50 and 670  $\text{Bq kg}^{-1}$  respectively. For  $^{232}\text{Th}$  and DR, the overall mean values were above the community weighted values of 50  $\text{Bq kg}^{-1}$  and 50  $\text{nGy h}^{-1}$  by the factors of 1.3 and 1.2 respectively. The latest standard considered from [Table 1](#) is UNSCEAR [31], which gave the community weighted values for radionuclides ( $^{238}\text{U}$ ,  $^{232}\text{Th}$  and  $^{40}\text{K}$ ) and DR as 32  $\text{Bq kg}^{-1}$ , 45  $\text{Bq kg}^{-1}$ , 420  $\text{Bq kg}^{-1}$  and 84  $\text{nGy h}^{-1}$  respectively. By comparing the community weighted values with the overall mean values in [Table 1](#), it is revealed that  $^{40}\text{K}$  and DR were below the permissible limit, while  $^{238}\text{U}$  and  $^{232}\text{Th}$  were above the community weighted values by the factors of 1.2 and 1.4 respectively. Since the estimated mean values presented in [Table 1](#) are greater than their respective standard deviation values, it indicates that there is high degree of uniformity in the presented data sets [32]. The comparative analysis of the measured radionuclides and DR with some selected studies from literature is revealed in [Table 2](#).

The uranium, isothorium, isotopotassium, and isodose maps of kaolin deposits in the upper axis of the field in Ifonyintedo are presented in [Figs. 2–5](#) respectively. Based on the standard set by UNSCEAR [31], the enhanced activity concentrations of uranium are depicted with red colour on [Fig. 2](#). The uranium distributions in the study area trend in NW – SE orientation, with its peak towards the western region. The activity concentrations of thorium trend in NNW – SSE orientation, with its order of increment explained from the colour scale ([Fig. 3](#)). Very low potassium activity dominates the study area, which is far lower than the global mean. Nonetheless, two distribution trends were observed from the isotopotassium map, which are NE – SW and SSW – NNE orientations ([Fig. 4](#)). The gamma isodose map ([Fig. 5](#)) revealed that the enhanced activity trend from north to south, and spread towards the SW and SE of the study area respectively. The distributions of the doses are explained from the colour scale of [Fig. 5](#).

The correlation studies between the radionuclides and the gamma dose were achieved by plotting the graphs of dose rate against  $^{238}\text{U}$  ([Fig. 6a](#)), dose rate against  $^{232}\text{Th}$  ([Fig. 6b](#)), and dose rate against  $^{40}\text{K}$  ([Fig. 6c](#)) respectively. Correlation study is usually performed between the pairs of radionuclides or / and its gamma dose rate when someone is keen to quick check the relationships that exist between the activity and gamma dose in the area of interest [38]. A weak correlation of 0.355 existed between  $^{238}\text{U}$  and DR, a fairly good correlation of 0.676 existed between  $^{232}\text{Th}$  and DR, while a poor correlation of 0.072 existed between  $^{40}\text{K}$  and DR as revealed in [Fig. 6a–c](#). The correlation results showed that the area of study is enriched in thorium. Hence, the gamma dose received from the kaolin deposits in the upper axis of Ifonyintedo is insignificant as a result of potassium isotopes, but might be weakly significant due to uranium series. Despite the transfer of radionuclides from the raw material to their finished product (such as the case of kaolin to tile), it is imperative to state that the miners on this field need to be aware of the hazards from overexposure to thorium. Thorium is one of radioactive metals that exist in soil, rock, water (surface and ground), and man's environment. It does not dissolve easily in water, or evaporate to the surface and environs of the Crust. Overexposure to thorium has been linked with cancers of various kind, liver diseases, malfunctioning of the body systems and blood stream related diseases. Generally, overexposure to background radiations has been linked with

**Table 2**

Comparison of the mean with some selected studies.

| Case study                         | U-238<br>(Bq/kg) | Th-232<br>(Bq/kg) | K-40<br>(Bq/kg) | Dose rate<br>(nGy/hr) | Country | Reference     |
|------------------------------------|------------------|-------------------|-----------------|-----------------------|---------|---------------|
| Phosphogypsum                      | 206.8            | 99.1              | 15.1            | 154.6                 | Brazil  | [33]          |
| Kaolin                             | 964.7            | 251.6             | 58.9            | 581                   | Egypt   | [34]          |
| Lambapur soil                      | 93.1             | 141.0             | —               | —                     | India   | [35]          |
| Mallapuram soil                    | 219.0            | 271.7             | —               | —                     | India   | [35]          |
| Peddagattu soil                    | 35.8             | 93.8              | —               | —                     | India   | [35]          |
| Clay                               | 39.3             | 49.6              | 569.5           | 74.1                  | Turkey  | [36]          |
| Kaolin                             | 82.0             | 94.8              | 463.6           | 117.7                 | Turkey  | [36]          |
| Soil profile 1                     | 13.71            | 10.45             | 57.17           | 15.20                 | Nigeria | [37]          |
| Soil profile 2                     | 11.49            | 8.83              | 59.77           | 13.30                 | Nigeria | [37]          |
| Soil                               | 19.16            | 48.56             | 1146.88         | 89.6                  | India   | [38]          |
| Brick, Soil, Cement, Sand and Clay | 9.19             | 45.60             | 295.11          | 53.50                 | India   | [32]          |
| Floor ceramic                      | 101.22           | 87.53             | 304.57          | 213.98                | Iraq    | [39]          |
| Wall ceramic                       | 102.12           | 70.90             | 328.60          | 178.40                | Iraq    | [39]          |
| Kaolin deposits                    | 38.2             | 65.1              | 93.9            | 59.6                  | Nigeria | Present study |
| Soil and rock                      | 32.0             | 45.0              | 420.0           | 84.0                  | Global  | [31]          |

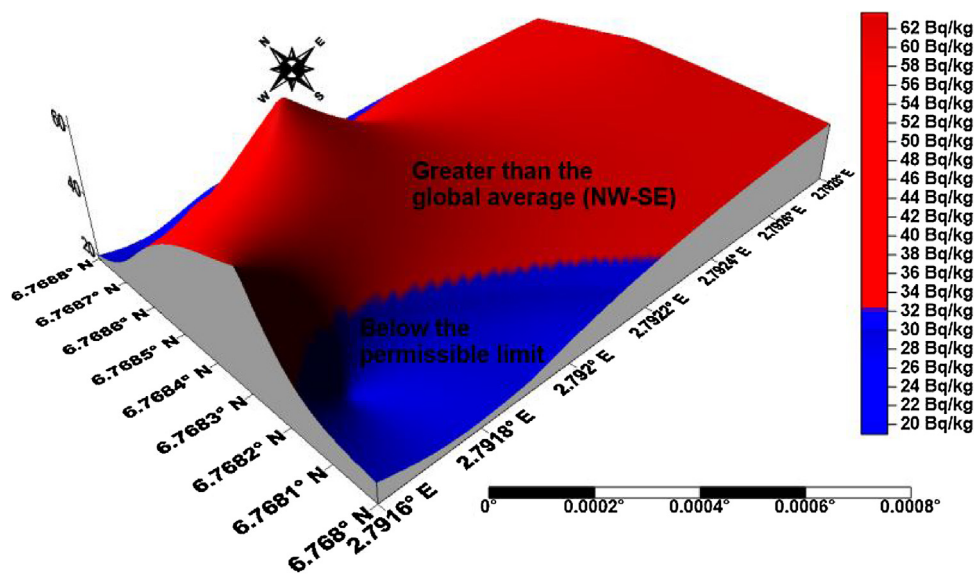


Fig. 2. Isouranium map of kaolin deposits in Ifonyintedo (upper axis).

severe health related problems such as disease of lung, bone, mouth, skin and failure of the body systems, which could result to death in the long term [40].

#### Assessment of radiological hazards from kaolin deposits

Eight radiological hazards were determined in order to evaluate the risks that are associated with the mined kaolin deposits in Ifonyintedo as well as the miners. The estimated hazards were radium equivalent, external and internal hazards, outdoor and indoor annual effective doses, gamma and alpha indices, and representative level index. All these estimated hazards are presented in Table 3.

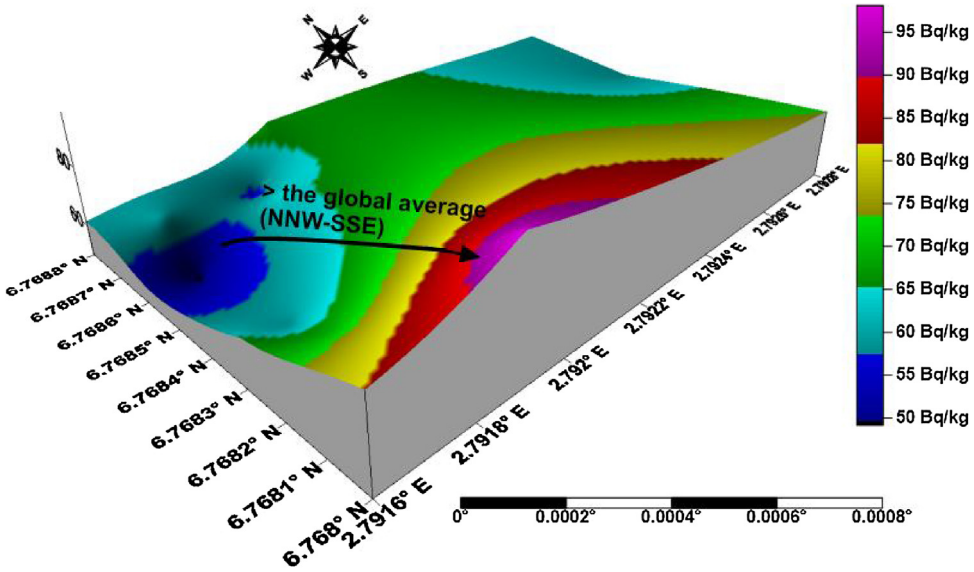


Fig. 3. Isothorium map of kaolin deposits in Ifonyintedo (upper axis).

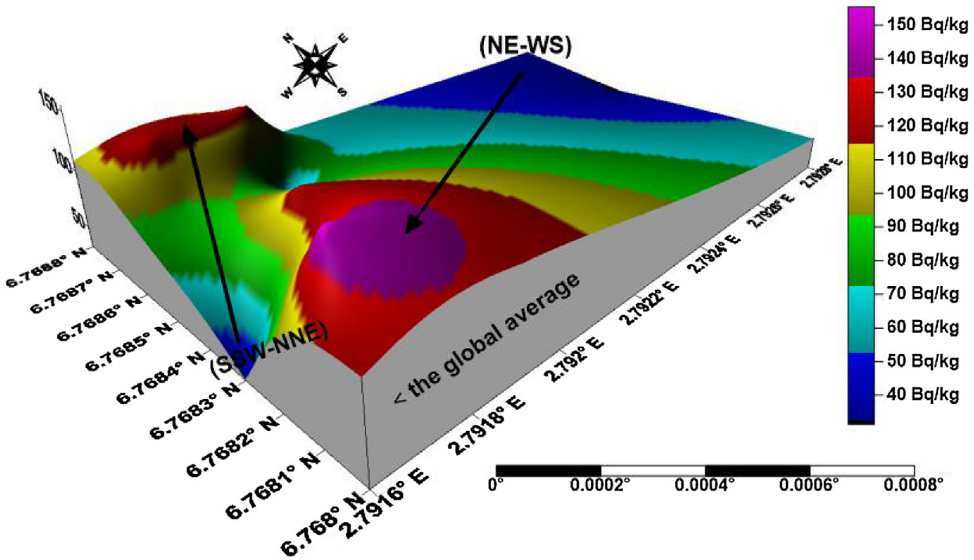


Fig. 4. Isopotassium map of kaolin deposits in Ifonyintedo (upper axis).

*Radium equivalent*

Since the measured activity of  $^{40}\text{K}$ ,  $^{232}\text{Th}$  and  $^{238}\text{U}$  are inhomogeneous, it is essential to introduce a common radiological index that evaluates the level of each of the radionuclides in the kaolin deposits. The estimated index, which is known as radium equivalent ( $Ra_{Eq}$ ) is presented in Eq. (4) as presented by Turhan [36].

$$Ra_{Eq} = AC_U + \left(\frac{10}{7}\right)AC_{Th} + \left(\frac{10}{130}\right)AC_K \tag{4}$$

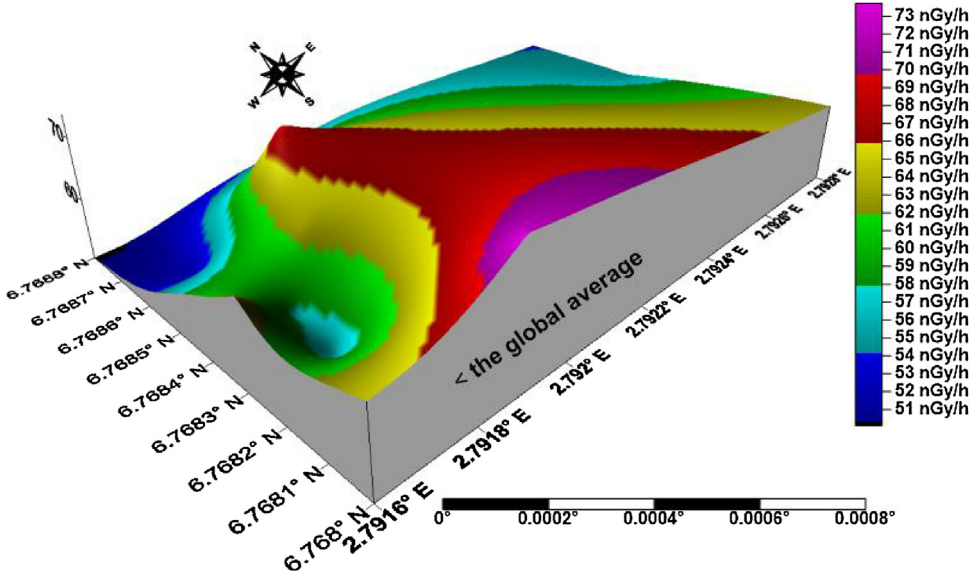


Fig. 5. Isodose map of kaolin deposits in Ifonyintedo (upper axis).

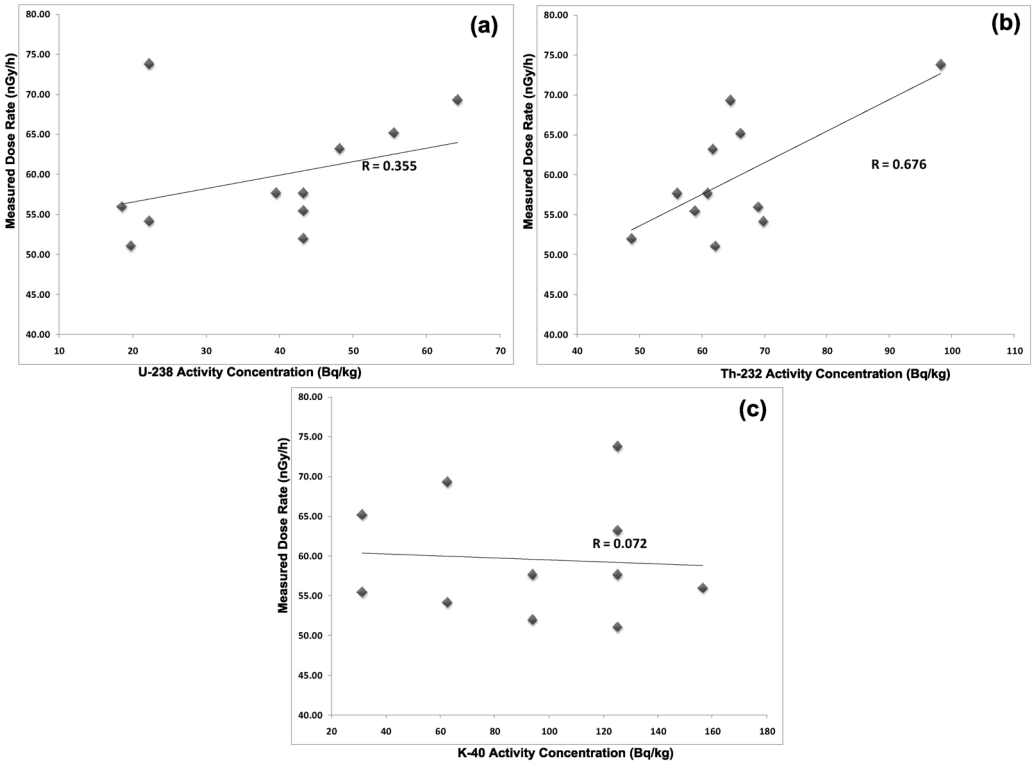


Fig. 6. Correlation plots between (a)  $^{238}\text{U}$  and DR (b)  $^{232}\text{Th}$  and DR (c)  $^{40}\text{K}$  and DR.



**Table 3**  
Summary of the radiological hazards estimate.

| ID    | Ra <sub>Eq</sub> (Bq kg <sup>-1</sup> ) | H <sub>Ex</sub> | H <sub>In</sub> | AED <sub>Outdoor</sub> (mSv y <sup>-1</sup> ) | AED <sub>Indoor</sub> (mSv y <sup>-1</sup> ) | I <sub>γ</sub> | I <sub>α</sub> | RLI   |
|-------|---|-----------------|-----------------|---|--|----------------|----------------|-------|
| UA 1  | 172.37                                  | 0.47            | 0.53            | 0.36  | 0.09   | 0.61           | 0.11           | 1.21  |
| UA 2  | 129.27                                  | 0.35            | 0.40            | 0.27  | 0.07   | 0.46           | 0.09           | 0.92  |
| UA 3  | 133.84                                  | 0.36            | 0.47            | 0.28  | 0.07   | 0.47           | 0.20           | 0.94  |
| UA 4  | 152.62                                  | 0.41            | 0.56            | 0.32  | 0.08   | 0.53           | 0.28           | 1.05  |
| UA 5  | 146.05                                  | 0.39            | 0.52            | 0.31  | 0.08   | 0.51           | 0.24           | 1.02  |
| UA 6  | 129.82                                  | 0.35            | 0.47            | 0.27  | 0.07   | 0.45           | 0.22           | 0.90  |
| UA 7  | 161.35                                  | 0.44            | 0.61            | 0.34  | 0.08   | 0.56           | 0.32           | 1.12  |
| UA 8  | 120.12                                  | 0.32            | 0.44            | 0.25  | 0.06   | 0.42           | 0.22           | 0.84  |
| UA 9  | 118.23                                  | 0.32            | 0.37            | 0.25  | 0.06   | 0.42           | 0.10           | 0.84  |
| UA 10 | 132.99                                  | 0.36            | 0.48            | 0.28  | 0.07   | 0.47           | 0.22           | 0.93  |
| UA 11 | 126.91                                  | 0.34            | 0.40            | 0.27  | 0.07   | 0.44           | 0.11           | 0.89  |
| Range | 118.23 – 172.37                         | 0.32–           | 0.37–           | 0.25–   | 0.06–  | 0.42–          | 0.09–          | 0.84– |
| Mean  | 138.51                                  | 0.37            | 0.48            | 0.29  | 0.07   | 0.48           | 0.19           | 0.97  |
| Limit | 370.00                                  | <1              | <1              | 0.70  | 0.05   | <1             | 1              | 1     |

where AC<sub>U</sub>, AC<sub>Th</sub> and AC<sub>K</sub> are the activity concentrations of <sup>238</sup>U, <sup>232</sup>Th and <sup>40</sup>K in Bq kg<sup>-1</sup> respectively. The implication of Eq. (4) is that the maximum limit of the Ra<sub>Eq</sub> must not be up to 370 Bq kg<sup>-1</sup>, such that the external dose of less than 1.5 mGy y<sup>-1</sup> will be maintained [37]. The Ra<sub>Eq</sub> activity in this study is presented in Table 3. The values ranged between 118.23 and 172.37 Bq kg<sup>-1</sup>, with the mean of 138.51 Bq kg<sup>-1</sup>. Both the range and the mean of Ra<sub>Eq</sub> values were below the limit of 370 Bq kg<sup>-1</sup> as reported by UNSCEAR [31].

#### External and internal hazards

Exposure to radiation could be external and/or internal. Eqs. (5) and (6) were used to determined the radiation hazards emanating from the field and the mined kaolin [32].

$$H_{Ex} = 0.0027AC_U + 0.0039AC_{Th} + 0.0002A_K \leq 1 \quad (5)$$

$$H_{In} = 0.0054AC_U + 0.0039AC_{Th} + 0.0002A_K \leq 1 \quad (6)$$

where AC<sub>U</sub>, AC<sub>Th</sub> and AC<sub>K</sub> have been defined in Eq. (4). The reduction of the limit of <sup>238</sup>U to half the numeric value essential to external exposure only is known as the internal hazard index, such that the internal dose received will be <1.5 mSv y<sup>-1</sup> [39]. The H<sub>Ex</sub> in this study varied between 0.32 and 0.47, with the mean of 0.37. As reported by Ravisankar [32], the internal exposure to radon and its progeny is managed by H<sub>In</sub>. Therefore, the H<sub>In</sub> from the kaolin deposits in this study as presented in Table 3 ranged from 0.37 to 0.61, with the overall mean of 0.48. In both cases, the external and internal hazards estimated over a kaolin mining field in Ifonyintedo were less than unity. This implies that the field poses no threat to the miners and the mined kaolin is safe for economic use.

#### Outdoor and indoor annual effective doses

In this present article, outdoor and indoor annual effective doses were estimated from the measured absorbed doses and other factors as reported from literature [37]. In order to estimate the Outdoor Annual Effective Dose (AED<sub>Outdoor</sub>), the dose conversion coefficient (0.7 Sv Gy<sup>-1</sup>) from absorbed dose in air to the effective dose received by the body and outdoor occupancy factor of 0.2 was adopted as given by UNSCEAR [31]. For the Indoor Annual Effective Dose (AED<sub>Indoor</sub>), the occupancy factor of 0.8 was adopted for AED<sub>Indoor</sub> [37]. This implies 8760 h are in a year. Individuals stayed longer indoor than outdoor in a day, hence the variation in the occupancy factors for outdoor and indoor respectively. Eqs. (7) and (8) were used to estimate the AED<sub>Outdoor</sub> and AED<sub>Indoor</sub> respectively [14,29,31,32,37].

$$AED_{\text{Outdoor}} (\text{mSv y}^{-1}) = \text{Dose rate (nGy h}^{-1}) \times (365 \times 24) \times 0.2 \times 0.7 (\text{Sv Gy}^{-1}) \times 10^{-6} \quad (7)$$

$$AED_{\text{Indoor}} (\text{mSv y}^{-1}) = \text{Dose rate (nGy h}^{-1}) \times (365 \times 24) \times 0.8 \times 0.7 (\text{Sv Gy}^{-1}) \times 10^{-6} \quad (8)$$

The expected mean annual external effective dose from naturally occurring radionuclides is 0.70 mSv y<sup>-1</sup>, while its internal counterpart is 0.05 mSv y<sup>-1</sup> [37]. In this study, the AED<sub>Outdoor</sub> ranged from 0.25 to 0.36 mSv y<sup>-1</sup>, while that of AED<sub>Indoor</sub> ranged from 0.06 to 0.09 respectively. The estimated means for the AED<sub>Outdoor</sub> and the AED<sub>Indoor</sub> are 0.29 and 0.07 mSv y<sup>-1</sup> respectively. These results indicate that the study area poses no risk to the miners as well as the materials that will be produced from the kaolin (such as tile).

### Gamma and alpha indices

Other key hazards that were considered in this study are gamma ( $I_\gamma$ ) and alpha ( $I_\alpha$ ) indices respectively. These indices were estimated based on the European Commission [30] standard. Gamma index ( $I_\gamma$ ) is the factor that assesses the  $\gamma$ -radiation hazard(s) associated with the naturally occurring radionuclides in a material. The  $I_\gamma$  is determined based on Eq. (9) as given by [28,30].

$$I_\gamma = 0.3333AC_U + 0.0050AC_{Th} + 0.0003AC_K \quad (9)$$

Where  $AC_U$ ,  $AC_{Th}$  and  $AC_K$  are the same as for other estimated hazards. The permissible range of the outdoor annual effective doses' contributions to the  $\gamma$ -radiation is 0.3 to 1 mSv y<sup>-1</sup>. Any material or sample that poses the AED<sub>Outdoor</sub> > this range should be exempted from use as raw materials or finished products [36]. If the  $I_\gamma \leq 1$ , it corresponds to an outdoor dose of 1 mSv y<sup>-1</sup>. However, if the  $I_\gamma \leq 0.5$ , it corresponds to an outdoor dose of 0.3 mSv y<sup>-1</sup> [14]. From Table 3, the  $I_\gamma$  ranged from 0.42 to 0.61, with a mean of 0.48. These results correspond to  $I_\gamma \leq 0.5$ , which gives the outdoor effective dose of 0.3 mSv y<sup>-1</sup>.

The alpha index ( $I_\alpha$ ) is used to estimate the exposure to  $\alpha$ -radiation associated with radon inhalation from a material. The  $I_\alpha$  is determined based on Eq. (10) [36].

$$I_\alpha = 0.005AC_U (\text{Bq kg}^{-1}) \quad (10)$$

where  $AC_U$  is the activity concentration of uranium in each location. It is measured in Bq kg<sup>-1</sup>. As suggested by the by the European Commission [30], the exhalating radon from a material can be greater than 200 Bq m<sup>-3</sup> if and only if the activity from uranium concentration is greater than 200 Bq kg<sup>-1</sup>. An  $I_\alpha$  that is less than or equals 1 corresponds to uranium activity (<sup>238</sup>U)  $\leq$  200 Bq kg<sup>-1</sup>. The  $I_\alpha$  as presented in Table 3 ranged from 0.09 to 0.32, with a geometric mean of 0.19. Both the range and the geometric mean results showed that the exposure as a result of  $\alpha$ -radiation on the kaolin field is minimal. However, period monitoring is recommended for  $\gamma$ -radiation emanating from the kaolin, since  $I_\gamma \leq 0.5$ , which corresponds to 0.3 mSv y<sup>-1</sup> of outdoor effective dose that was established on the field.

### Representative level index

The Representative Level Index (RLI) activity was also determined in this study. The RLI is used to determine the  $\gamma$ -radioactivity level associated with the concentrations of these radionuclides. Eq. (11) was used to estimate the RLI over a kaolin field in Ifonyintedo as proposed by [28] and [38].

$$RLI = \left[ \frac{1}{150} \right] AC_U + \left[ \frac{1}{100} \right] AC_{Th} + \left[ \frac{1}{1500} \right] AC_K \quad (11)$$

where  $AC_U$ ,  $AC_{Th}$  and  $AC_K$  are the activity concentrations of <sup>238</sup>U, <sup>232</sup>Th and <sup>40</sup>K (Bq kg<sup>-1</sup>) respectively. The safety rule is that the RLI < 1 [38,39]. The estimated RLI values are presented in Table 3. The results fluctuated from 0.84 to 1.21, with the overall mean of 0.97. When compared to the limit, it has been revealed that the range is slightly above the limit, while the overall mean  $\approx$  1. This implies that the RLI of kaolin deposits in the upper axis of Ifonyintedo field may pose radiation hazard, which might be harmful to the miners and the users of the product(s) from the kaolin deposits if proper periodic monitoring and assessment are neglected on the field.

## Conclusion

For the eleven locations covered in this study, the radiometric measurements of radioactivity concentrations of  $^{40}\text{K}$ ,  $^{232}\text{Th}$  and  $^{238}\text{U}$  as well as the gamma doses over a kaolin mining field in Ifonyintedo, Nigeria were achieved using Super-Spec (RS-125) detector. The radiological hazards associated with mining of this mineral deposits and its usability as building material (either as raw material or finished product, as in case of tile) were evaluated. The numbers of conclusions drawn from this study are:

- i The range of the estimated mean from four-time in situ measurements per location of  $^{238}\text{U}$ ,  $^{232}\text{Th}$ ,  $^{40}\text{K}$  and DR spanned from  $18.53 \pm 0.02$ – $64.22 \pm 0.03 \text{ Bq kg}^{-1}$ ,  $48.72 \pm 0.15$ – $98.25 \pm 0.11 \text{ Bq kg}^{-1}$ ,  $31.30 \pm 0.50$ – $156.50 \pm 0.12 \text{ Bq kg}^{-1}$ ,  $51.04 \pm 2.18$ – $73.77 \pm 1.80 \text{ nGy h}^{-1}$  respectively. When compared with the recent standard adopted in this study [31], the mean activity concentrations of  $^{238}\text{U}$  and  $^{232}\text{Th}$  were above the limit by the factors of 1.2 and 1.4 respectively, while  $^{40}\text{K}$  and DR were below the limit.
- ii The  $\text{Ra}_{\text{Eq}}$  activity ranged from 118.23 to 172.37  $\text{Bq kg}^{-1}$  were below the recommended limit of 370  $\text{Bq kg}^{-1}$  as given by UNSCEAR [31].
- iii The external and internal hazards which ranged from 0.32 to 0.47, and 0.37–0.61 respectively were below the recommended limit of unity as reported by [32] and [39].
- iv The outdoor and indoor annual effective doses ranged from 0.25 to 0.36  $\text{mSv y}^{-1}$ , and 0.06–0.09  $\text{mSv y}^{-1}$ . The mean of  $\text{AED}_{\text{Outdoor}}$  and  $\text{AED}_{\text{Indoor}}$  were below the limits of 0.70 and 0.05  $\text{mSv y}^{-1}$  as presented by UNSCEAR [31] and Avwiri et al. [37].
- v The  $I_\gamma$  ranged from 0.42 to 0.61, with a mean of  $0.48 \approx 0.5$ . The gamma index in Ifonyintedo corresponds to  $I_\gamma \leq 0.5$ , which gives the outdoor effective dose of 0.3  $\text{mSv y}^{-1}$ . The  $I_\alpha$  ranged from 0.09 to 0.32, with a geometric mean of 0.19. The  $\alpha$ -radiation exposures as a result of usage of the mineral deposits as raw material or finished product, or to the miners are minimal, but that of  $\gamma$ -radiation exposure needs periodic monitoring [28,30,36].
- vi The RLI ranged from 0.84 to 1.21, which revealed that some locations (UA1, UA4, UA5 and UA7) are hazardous, because their RLI were beyond the recommended value (i.e. 1.0), while the remaining locations are close to unity as presented in Ravisankar et al. [32] and Chandrasekaran et al. [38]. The overall mean of 0.97 was achieved, which could be approximated to unity.

Ogun state is the leading state producer of solid minerals in Nigeria, with kaolin being one of the major solid minerals mined from the state. It is however recommended that periodic assessment of radiological exposure to the miners and the mined kaolin deposits should be of utmost concern to the Nigerian Environmental Standards and Regulatory Enforcement Agency, since some of the estimated hazards are close or could be approximated to the permissible limit.

## Acknowledgements

The partial sponsorship received from the management of Covenant University is acknowledged. We specially acknowledge the assistance rendered by Pastor P.A. Ayinla (Immigration Officer Retd.) from Taiwo Akemo ruling house, Ifonyintedo during the geophysical survey of this study. We are also grateful to the Department of Physics, Covenant University for releasing the equipment used for the radiometric survey.

## References

- [1] T.A. Adagunodo, O.S. Hammed, M.R. Usikalu, W.A. Ayara, R. Ravisankar, Data on the radiometric survey over a Kaolinitic Terrain in Dahomey Basin, Nigeria, Data Brief 18C (2018) 814–822, doi:<http://dx.doi.org/10.1016/j.dib.2018.03.088>.
- [2] J. Velho, C. Gomes, Characterization of Portuguese Kaolins for the paper industry: beneficiation through new delamination techniques, Appl. Clay Sci. 6 (2) (1991) 155–170.
- [3] H. Murray, Overview – clay mineral applications, Appl. Clay Sci. 5 (5–6) (1991) 379–395.
- [4] A. Shvarzman, K. Kovler, G. Grader, G. Shter, The effect of dehydroxylation/amorphization degree on pozzolanic activity of kaolinite, Cem. Concr. Res. 33 (3) (2003) 405–416.

- [5] F. Cravero, I. Gonzalez, E. Galan, E. Dominguez, Geology, mineralogy, origin and possible applications of some Argentinian Kaolins in the Neuquen Basin, *Appl. Clay Sci.* 12 (1–2) (1997) 27–42.
- [6] J.R. Schupp, E. Fallahi, I.J. Chun, Effect of particle film on fruit sunburn, maturity and quality of “Fuji” and “Honeycrisp” apples, *Acta Hort. (ISHS)* 636 (2004) 551–556. [http://www.actahort.org/books/636/636\\_70.html](http://www.actahort.org/books/636/636_70.html).
- [7] A. Aras, M. Albayrak, M. Arikan, K. Sobolev, Evaluation of selected Kaolins as raw materials for the Turkish cement and concrete industry, *Clay Miner.: J. Fine Part. Sci.* 42 (2) (2016) 233–244.
- [8] Ceramic Research Company, Roles and Functions of Ceramic Raw Materials in the Ceramic Tile Bod Retrieved on, (2012). [http://www.ceramic-research.com/articles\\_02.html](http://www.ceramic-research.com/articles_02.html).
- [9] F.H. Clews, *Heavy Clay Technology*, Academic Press, 1969, pp. 1–16.
- [10] X. Lu, G. Yang, C. Ren, Natural radioactivity and radiological hazards of building materials in Xianyang, China, *Radiat. Phys. Chem.* 81 (7) (2012) 780–784.
- [11] A.S. Arabi, I.I. Funtua, B.B.M. Dewu, A.M. Muhammad, Background radiation and radiological hazard associated with local building materials around Zaria, Nigeria, *Radiochemistry* 57 (2) (2015) 207–212.
- [12] J. Ge, J. Zhang, Natural radioactivity and radiation hazards of building materials in Anhui Province, China, *J. Radioanal. Nucl. Chem.* 304 (2) (2015) 609–613.
- [13] M.O. Isinkaye, J.I. Agbi, Natural radioactivity and associated radiation hazards of some commonly used building materials in Southwest Nigeria, *Radioprotection* 48 (3) (2013) 355–365.
- [14] E.S. Joel, M. Omeje, O.O. Adewoyin, C. Ehi-Eromosele, Z. Embong, F. Oyawoye, Assessment of natural radioactivity in various commercial tiles used for building purposes in Nigeria, *MethodsX* 5 (2017) 8–19, doi:<http://dx.doi.org/10.1016/j.mex.2017.12.002>.
- [15] E.S. Joel, M. Omeje, O.O. Adewoyin, C.O. Ehi-Eromosele, Z. Embong, M.A. Saheed, Assessment of natural radionuclides and its radiological hazards from tiles made in Nigeria, *Radiat. Phys. Chem.* 144 (2017) 43–47.
- [16] T.A. Adagunodo, S. Lüning, A.M. Adeleke, J.O. Omidiora, A.P. Aizebeokhai, K.D. Oyeyemi, O.S. Hammel, Evaluation of  $0 \leq M \leq 8$  earthquake data sets in African-Asian region during 1966–2015, *Data Brief* 17C (2018) 588–603, doi:<http://dx.doi.org/10.1016/j.dib.2018.01.049>.
- [17] L.A. Sunmonu, T.A. Adagunodo, E.R. Olafisoye, O.P. Oladejo, The groundwater potential evaluation at industrial Estate Ogbomoso Southwestern Nigeria, *RMZ-Mater. Geoenviron.* 59 (4) (2012) 363–390.
- [18] T.A. Adagunodo, L.A. Sunmonu, A. Ojoawo, O.P. Oladejo, E.R. Olafisoye, The hydro geophysical investigation of Oyo State industrial Estate Ogbomoso, Southwestern Nigeria using vertical electrical soundings, *Res. J. Appl. Sci. Eng. Technol.* 5 (5) (2013) 1816–1829.
- [19] T.A. Adagunodo, L.A. Sunmonu, O.P. Oladejo, E.R. Olafisoye, Groundmagnetic investigation into the cause of the subsidence in the abandoned local government secretariat, Ogbomoso, Nigeria, *ARPN J. Earth Sci.* 2 (3) (2013) 101–109.
- [20] E.R. Olafisoye, L.A. Sunmonu, T.A. Adagunodo, O.P. Oladejo, Groundwater contaminant's investigation at aarada waste disposal site using geophysical and hydro-physicochemical approach, *IOSR J. Environ. Sci. Toxicol. Food Technol.* 2 (4) (2013) 01–10.
- [21] T.A. Adagunodo, L.A. Sunmonu, O.P. Oladejo, Effect of constructing high-rise buildings without a geophysical survey, *Nigerian J. Phys.* (September) (2014) 91–100 Special Edition.
- [22] T.A. Adagunodo, A.A. Adeniji, A.V. Erinle, S.A. Akinwumi, O.O. Adewoyin, E.S. Joel, O.T. Kayode, Geophysical investigation into the integrity of a reclaimed open dumpsite for civil engineering purpose, *Interciencia* J. 42 (11) (2017) 324–339.
- [23] K.D. Oyeyemi, A.P. Aizebeokhai, T.A. Adagunodo, O.M. Olofinnade, O.A. Sanuade, A.A. Oloajo, Subsoil characterization using geoelectrical and geotechnical investigations: implications for foundation studies, *Int. J. Civ. Eng. Technol.* 8 (10) (2017) 302–314.
- [24] Radiattion Solution Inc, RS-125/230 User Manual, Revision 1.05-December 2015, Firmwave Version 5v95, Part Number D-1009, (2015) pp 7.
- [25] International Atomic Energy Agency (IAEA), Construction and Use of Calibration Facilities for Radiometric Field Equipment. Technical Reports Series No. 309, IAEA, Vienna, 1989.
- [26] M. Omeje, H. Wagiran, N. Ibrahim, S.K. Lee, S. Sebri, Radiological monitoring of borehole in Dei-Dei, Abuja, North Central Nigeria, *APCBEE Procedia* 10 (2014) 54–58.
- [27] P.D. Rostron, J.A. Healthcote, M.H. Ramsey, Comparison between in situ and ex situ gamma measurements on land area within a decommissioning nuclear site: a case study at Dounreay, *J. Radiol. Prot.* 34 (3) (2014) 495–508.
- [28] NEA-OECD (Nuclear Energy Agency – Organization for Economic Cooperation and Development), Exposure to Radiation from Natural Radioactivity in Building Materials. Report by Group of Experts of the NEA, Paris, France, (1979) .
- [29] UNSCEAR (United Nations Scientific Committee on the Effects of Atomic Radiation), Sources and Effects of Ionizing Radiation. Report to the General Assembly With Annexes, United Nations Publication, New York, 1993.
- [30] EC (European Commission), Radiation Protection, 112-Radiological Protection Principles Concerning the Natural Radioactivity of Building Materials, Directorate – General Environment. Nuclear Safety and Civil Protection, Luxembourg, 1999.
- [31] UNSCEAR (United Nations Scientific Committee on the Effects of Atomic Radiation), Sources, Effects, and Risks of Ionizing Radiation. Report to the General Assembly, With Scientific Annexes, United Nations Publication, New York, 2000.
- [32] R. Ravisankar, Y. Raghu, A. Chandrasekaran, M.S. Gandhi, P. Vijayagopa, B. Venkatraman, Determination of natural radioactivity and the associated radiation hazards in building materials used in Polur, Tiruvannamalai District, Tamilnadu, India using gamma ray spectrometry with statistical approach, *J. Geochem. Explor.* 163 (2016) 41–52, doi:<http://dx.doi.org/10.1016/j.jgexplo.2016.01.013>.
- [33] B. Mazzilli, C. Saueia, Radiological implications of using phosphogypsum as a building material in Brazil, *Radiat. Prot. Dosim.* 86 (1) (1999) 63–67.
- [34] N.W. El-Dine, A. Sroor, A. El-Shershaby, S.M. El-Bahi, F. Ahmed, Radioactivity in local and imported kaolin types used in Egypt, *Appl. Radiat. Isot.* 60 (2004) 105–109.
- [35] S.J. Sartandel, S.K. Jha, S.V. Bara, R.M. Tripathi, V.D. Puranik, Spatial distribution of uranium and thorium in the surface soil around proposed uranium mining site at Lambapur and its vertical profile in the Nagarjuna Sagar Dam, *J. Environ. Radioact.* 100 (2009) 831–834.

- [36] S. Turhan, Radiological impacts of the usability of clay and kaolin as raw material in manufacturing of structural building materials in Turkey, *J. Radiol. Prot.* 29 (2009) 75–83, doi:<http://dx.doi.org/10.1088/0952-4746/29/1/005>.
- [37] G.O. Avwiri, J.C. Osimobi, E.O. Agbalagba, Evaluation of radiation hazard indices and excess lifetime cancer risk due to natural radioactivity in soil profile of Udi and Ezeagu local government areas of Enugu State, Nigeria, *Compr. J. Environ. Earth Sci.* 1 (1) (2012) 1–10.
- [38] A. Chandrasekaran, R. Ravisankar, G. Senthilkumar, K. Thillaivelavan, B. Dhinakaran, P. Vijayagopal, S.N. Bramha, B. Venkatraman, Spatial distribution and lifetime cancer risk due to gamma radioactivity in Yelagiri Hills, Tamilnadu, India, *Egypt. J. Basic Appl. Sci.* 1 (2014) 38–48.
- [39] M.S. Amana, Radiation hazard index of common imported ceramic using for building materials in Iraq, *Aust. J. Basic. Appl. Sci.* 11 (10) (2017) 94–102.
- [40] T.A. Adagunodo, L.A. Sunmonu, M.A. Adabanija, E.A. Suleiman, O.A. Odetunmbi, Geospatial exploration of radioelements's datasets in a flood plain of crystalline bedrock, *Data Brief* 15(c) (2017) 809–820, doi:<http://dx.doi.org/10.1016/j.dib.2017.10.046>.