

## Application of 2D electrical resistivity imaging and cone penetration test (CPT) to assess the hazardous effect of near surface water on foundations in Lagos Nigeria

This content has been downloaded from IOPscience. Please scroll down to see the full text.

2017 J. Phys.: Conf. Ser. 852 012033

(<http://iopscience.iop.org/1742-6596/852/1/012033>)

View [the table of contents for this issue](#), or go to the [journal homepage](#) for more

Download details:

IP Address: 80.248.0.226

This content was downloaded on 07/06/2017 at 23:24

Please note that [terms and conditions apply](#).

You may also be interested in:

[Forensic Assessment on Ground Instability Using Electrical Resistivity Imaging \(ERI\)](#)

Z A M Hazreek, A T S Azhar, M Aziman et al.

[Discrete Symmetries CP, T, CPT](#)

J Bernabeu

[Acidic Barren Slope Profiling using Electrical Resistivity Imaging \(ERI\) at Ayer Hitam area Johor, Malaysia](#)

A T S Azhar, Z A M Hazreek, M Aziman et al.

[Electrical Resistivity Imaging survey to detect uncharted mine galleries in the mining district of](#)

[Linares \(Ja'n, Spain\)](#)

J Martínez-López, J Rey, J Dueñas et al.

[Current variation in electrical resistivity probing using Wenner and Schlumberger arrays](#)

B S Badmus, E A Ayolabi, J A Olowofela et al.

[Aquifer Distribution Based on 1D Resistivity Method at Jatinangor Educational Area, Sumedang Regency, West Java Province](#)

Andreas Franzona Pangaribuan, Febriwan Mohammad, Muhammad Fadly et al.

[Statistical correlations of shear wave velocity and penetration resistance for soils](#)

Ünal Dikmen

[Omnibus experiment: CPT and CP violation with sterile neutrinos](#)

K K Loo, N Yu Novikov, M V Smirnov et al.

# Application of 2D electrical resistivity imaging and cone penetration test (CPT) to assess the hazardous effect of near surface water on foundations in Lagos Nigeria

O O Adewoyin<sup>1,\*</sup>, E O Joshua<sup>2</sup>, M L Akinyemi<sup>1</sup>, M Omeje<sup>1</sup> and E S Joel<sup>1</sup>

<sup>1</sup>Department of Physics, College of Science and Technology, Covenant University, Ota, Ogun State, Nigeria

<sup>2</sup>Department of Physics, Faculty of Science, University of Ibadan, Ibadan, Oyo State, Nigeria

\*E-mail: segadot@yahoo.com

**Abstract.** Adequate information on the condition of the subsurface is very important for site evaluation for engineering purposes. In this study two dimensional (2D) geoelectrical resistivity survey and cone penetration tests were conducted to study the hazardous effect of excess near surface water on the foundation of building in a reclaimed land located at Victoria Island area of Lagos State. The results of the inverted 2D geoelectrical resistivity data revealed three distinct geoelectrical layers characterized by low to moderate electrical resistivity of 2.23 and 129  $\Omega m$  and 9.46 to 636  $\Omega m$  respectively. The topsoil is characterized by wet sandy soil, which is underlain by sandy clay and banded at the below by a geologic formation of low resistivity which is suspected to be clay. The clay material may be responsible for the excess water retention observed in the area. The CPT method on the other hand revealed a geological formation of low resistance to penetration between 2-3 kg/cm<sup>2</sup> from the topsoil to a depth of 7 m, which may be the effect of excess water in the near surface. This study revealed that the foundation of building may not be founded directly on the soil in any reclaimed land as this may result in collapse as a result of upward migration of water to the near surface.

## 1. Introduction

Lack of appropriate studies of the subsurface is one of the factors contributing to the frequent building collapse in our society of late. Therefore, adequate studies of the subsurface [1] will assist building developers on the right choice of building materials, type of foundation and the design that matches a particular geological setting [2][3]. Several approaches have been used for the success of foundation investigations among which are the conventional and modern geophysical and geotechnical methods, particularly electrical resistivity technique and cone penetration test [4][5]. This combination has become presently very reliable and popular techniques to investigate the subsurface underground features for different applications, such as environmental, groundwater potential study, engineering and geotechnical, investigation [6][7][8].

The electrical resistivity method is non invasive, cost effective and fast to conduct, it also measures the lateral and vertical variation of resistivity with depth, the acquired resistivity data is used to produce an inverted 2D image of the surveyed area[9]. The cone penetration test on the other hand measures the resistance of the subsurface to cone penetration, which is used to determine the strength or the bearing capacity of the subsurface [10][8][11]. This method is capable of a single point investigation but it is essential to ground-truth the result obtained from other geophysical methods. Although, the method is invasive but it is not destructive, it is a very fast geotechnical method and



very economical [12][13][14][15]. In the present study, 2D resistivity method using Wenner array electrode configuration and cone penetration test were conducted in order to determine the effect of excess near surface water to engineering construction.


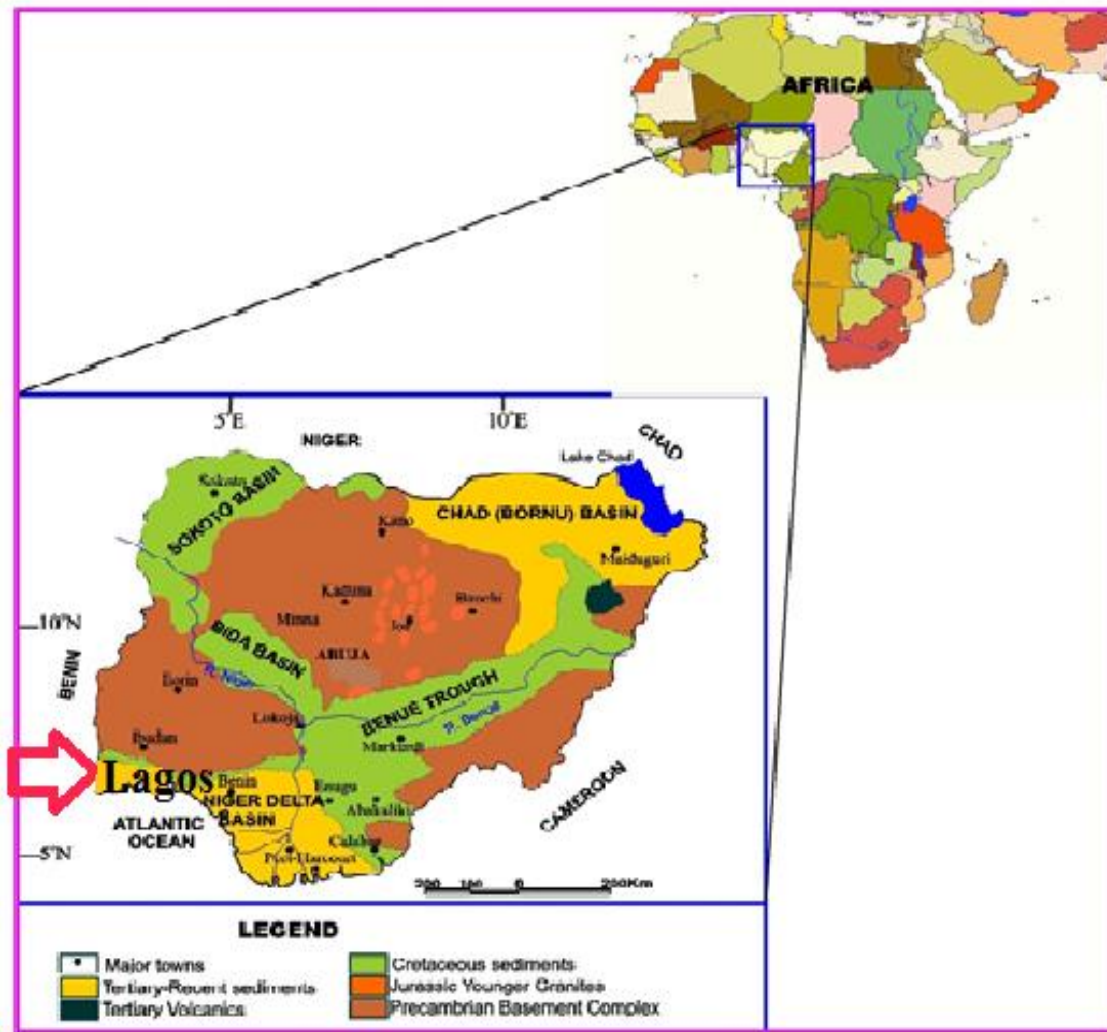


Figure 1. Location map of the studied area

## 2. Field description

### 2.1. Geological setting

The study area is located at Eti-Osa local government in the southeastern part of Lagos State (Figure 1). It lies between latitudes  $6^{\circ} 30' 37''$  and  $6^{\circ} 30' 18''$  N and longitude  $3^{\circ} 36' 3''$  and  $3^{\circ} 35' 34''$  E in South West Nigeria. This area is in the zone of coastal creeks and lagoons developed by barrier beaches associated with sand deposition. It is situated in the Nigeria sector of the Benin-basin and near the eastern margin of the basin. The geological formation of the study area is composed of sediments that are typical of the marine environments, which is an intercalation of sand and clay (Figure 2). These sediments also grade into one another and vary widely in both lateral extent and thickness [16][17]. The choice of this study area is because the area is reclaimed from water bodies and it is always logged with water.

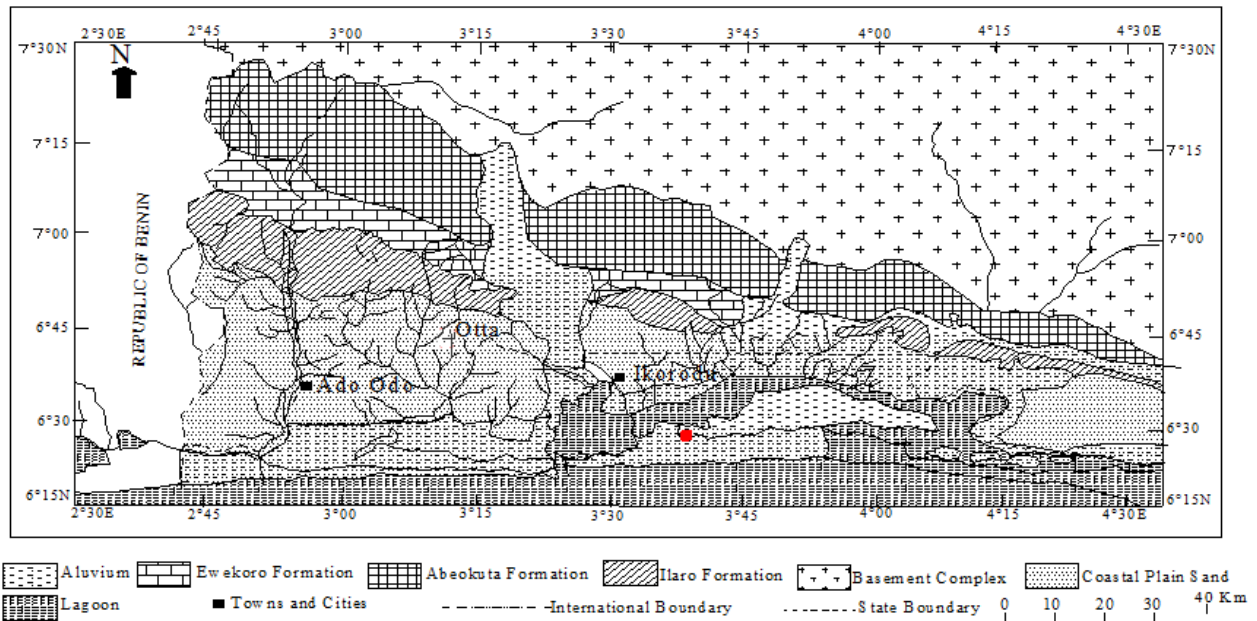


**Figure 2.** Simplified geological map of the study area, with the study area marked in red

### 3. Data acquisition and processing

2D electrical resistivity survey was conducted in the study area using an ABEM Terrameter (SAS 1000/4000) [18]. Four 2D profiles were surveyed with profile length ranging between 85 and 250 m as a result of accessibility, 5m electrode spacing was used. The 2D data was processed using RES2DINV software. The RES2DINV inversion code uses nonlinear optimization technique that automatically determines the inverse model of the 2D resistivity distribution of the subsurface [12]. The RES2DINV code subdivides the subsurface into a number of rectangular blocks on the basis of the distribution and volume of the data measured, which also depends on the electrode spacing, positions of electrodes and the data level [13]. The inversion was subjected to least-squares inversion technique with standard least-squares constraint, which reduces the square of the difference between the observed and the computed apparent resistivity. The cone penetration test was conducted with the use of a 2.5 ton Shell and Auger equipment. Two cone tests were conducted at two different locations in the study area. In this method a cylindrical penetrometer with a conical tip was driven into the ground at a constant rate. During penetration, the forces acting on the cone tip and on the shaft behind the tip are measured. For this study a standard Dutch cone ( $60^\circ$  apex angle and base area of  $10 \text{ cm}^2$ ) was used. The investigation of each location was concluded when the anchors that held the CPT rig firmly to the ground began to pull out of the ground. The cone resistance data obtained by this technique was plotted against the depth.


### 4. Results and discussion

Electrical resistivity profiling is used to acquire information on the lateral and vertical variation of resistivity with depth. The results of the inverted 2D electrical resistivity data showed three distinct geoelectrical layers which were delineated in the study area (Figure 3).

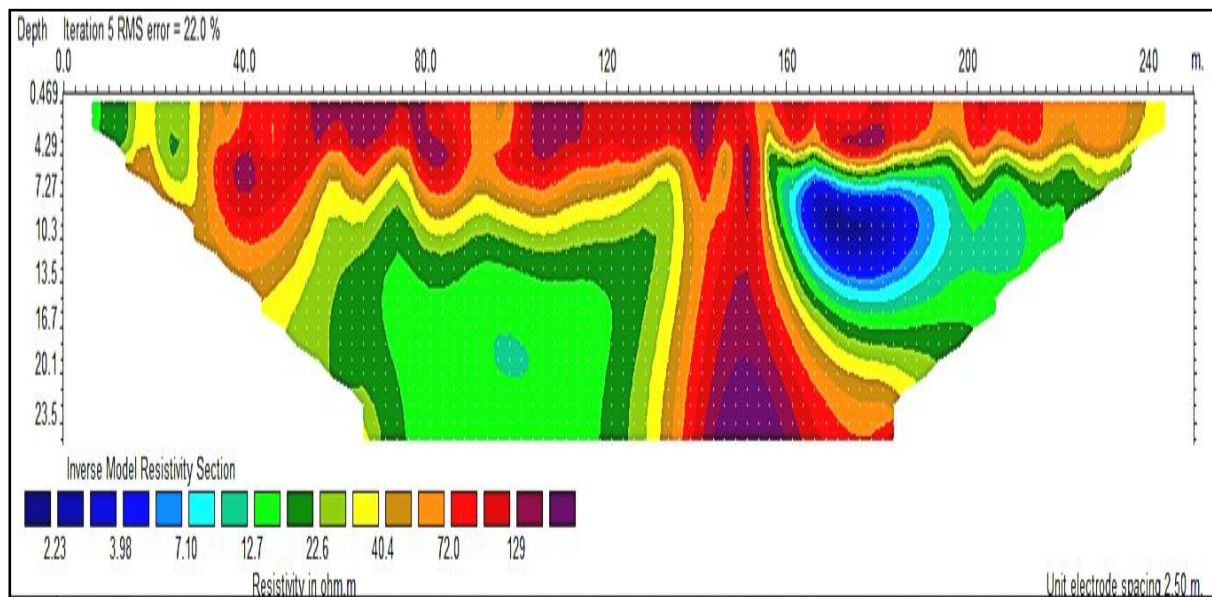

**Figure 3.** 2D inverse resistivity model conducted in the study area

The lithology of the delineated layers was dependent on all other available information from boreholes, hand-dug wells, known geology and previous studies. The first geoelectric layer represents the top soil with thickness varies from 0.5 to 7 m and has high resistivity value of about  $150 \Omega m$  corresponding to wet sand. The second geoelectric layer has a moderate resistivity values that ranged between 30 and  $70 \Omega m$  with an average thickness of 6 m representing sand clay. The third geoelectric layer depicted very low resistivity values that ranged between 2 and  $10 \Omega m$  with an average thickness of about 8 m corresponding to clay layer in the study site. Within the depth of investigation for foundation at the study area, the 2D electrical resistivity image revealed variations in electrical resistivity with clay layer of appreciate thickness in the subsurface. Also, there is a channel for upward migration of water from the subsurface noticed in the 2D image. Clay materials have poor porosity and this explains why the study area is always logged with water, which may be very harzadous to the foundation of the building. The result of the cone penetration test revealed the material from the topsoil to a depth of about 7 m to be of low resistance of about  $2-3 \text{ kg/cm}^2$  (Figure 4). The geologic formation with this type of resistance value may be regarded as a weak geomaterial and of low bearing capacity. The low bearing capacity observed in the first region of the subsurface may be as a result of the influx of water into the geomaterial which is retained by the presence of clay material in the subsurface.

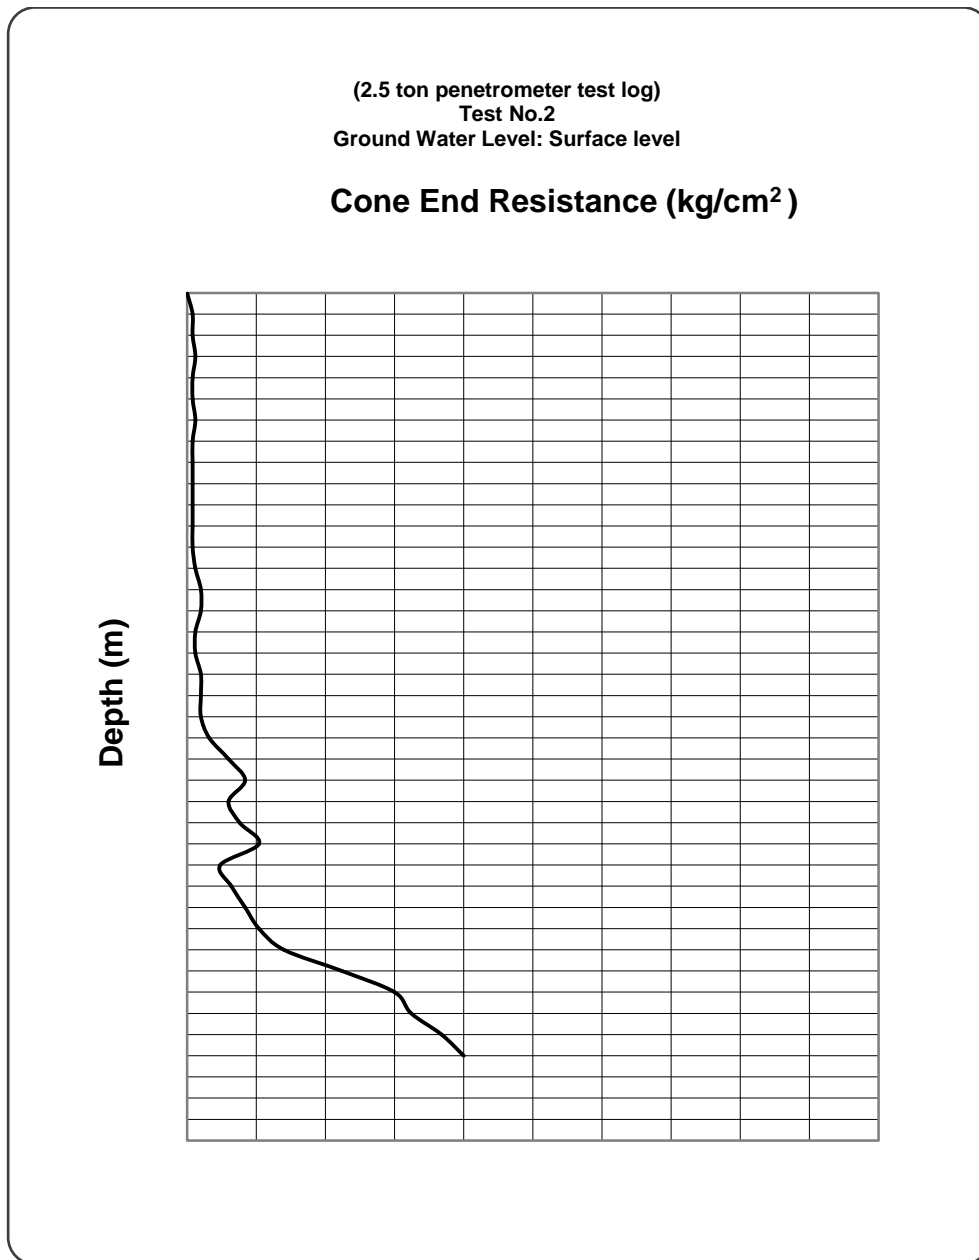

**Figure 4.** Result of cone penetration test conducted in the study area.

## 5. Conclusions

From the geologic information, interpretation of resistivity data and cone penetration test results conducted in the study area, it can be concluded that there are three distinct geoelectric layers, which are (from top to bottom); wet sand (150 ohm.m), sandy clay (30 to 70 ohm.m) and clay layer (2-10 ohm.m). Within the depth of investigation for foundation, there are no faults and cavities but a channel that allows for upward migration of water to the near surface. The geomaterial from the topsoil to a depth of about 7 m is composed of soft geologic formation, which may be the influence of water retained in the body of the soil. Some sort of soil improvement or pile foundation is recommended in order to mitigate the direct impact of the foundation on the soil.

## References

- [1] Rainone M L, Rusi S and Torrese P 2015 Mud volcanoes in central Italy: subsoil characterization through a multidisciplinary approach *Geomorphology* **234** 228
- [2] Ayolabi E A, Enoh I J E and Folorunsho A F 2012 Engineering site characterisation using 2-D and 3-D tomography *Earth Science Research* **2**(1) 133
- [3] Cassidy R, Comte J, Nitsche J, Wilson C, Flynn R and Offerdinger V 2014 Combining multi scale geophysical techniques for robust hydro-structural characterization in catchments underlain by hardrock in post-glacial regions *Journal of Hydrology* **517** 715
- [4] Muhammad Y K 2013 Engineering geophysical study of unconsolidated topsoil using shallow seismic refraction and electrical resistivity techniques *Journal of Environment and Earth Science* **3**(8) 120
- [5] Poenaru A 2016 Correlations between cone penetration test and seismic dilatometer marchetti test with common laboratory investigations *Energy Procedia* **85** 399
- [6] Busato L, Boaga J, Perruzo L, Himi M, Cola S, Bersan S and Cassiani G 2016 Combined geophysical surveys for the characterization of a reconstructed river embankment *Engineering Geology* **211** 74
- [7] Heon-Joon P, Derk-Moon K, Ki-Seng K, Hee-Yoon A, Dong-Soo K 2012 Noninvasive geotechnical site investigation for stability of cheomseongdae *Journal of Cultural Heritage* **13** 98
- [8] Perri M T, Boaga J, Bersan S, Cassiani G, Cola S, Deiana R, Simonini P and Patti S 2014 River embankment characterization: The joint use of geophysical and geotechnical techniques *Journal of Applied Geophysics* **110** 5
- [9] Perrone A, Lapenna V and Piscitelli S 2014 Electrical resistivity tomography technique for landslide investigation: A review *Earth-Science Reviews* **135** 65
- [10] Loperte A, Soldovieri F, Palombo A, Santini F and Lapenna V 2016 An integrated geophysical approach for water infiltration detection and characterization of Morte Cotugno rock-fill dam (southern Italy) *Engineering Geology* **211** 162
- [11] Sarma V S 2014 Electrical resistivity (ER), self potential (SP), induced polarization (IP), spectral induced polarization (SIP), and electrical resistivity tomography (ERT) prospection in NGRI for the past 50 years-A brief review *J. Ind. Geophys. Union* **18**(2) 245
- [12] Aizebeokhai A P, Olayinka A I and Singh V S 2010 Application of 2D and 3D geoelectrical resistivity imaging for engineering site investigation in a crystalline basement terrain, Southwestern Nigeria *Environmental Earth Science* **61**(7) 1481
- [13] Loke M H 2001 Electrical imaging surveys for environmental and engineering studies: a practical guide to 2D and 3D surveys Available at [http:// www.geoelectrical.com](http://www.geoelectrical.com) [Accessed: 14/01/2013]
- [14] Oyedele K F, Oladele S and Adedoyin O 2011 Application of geophysical and geotechnical methods to site characterization for construction purposes at Ikoyi, Lagos, Nigeria *Journal of Earth Sciences and Geotechnical Engineering* **1**(1) 87
- [15] Sopaci E and Akgun H 2015 Geotechnical assessment and engineering classification of the Antalya tufa rock, southern Turkey *Engineering Geology* **197** 211
- [16] Adepelumi A A and Olorunfemi M O 2000 Engineering geological and geophysical investigation of the reclaimed Lekki, Peninsula, Lagos, South west Nigeria *Bulletin of Engineering, Geology and The Environment* **58** 125
- [17] Adepelumi A A, Ako B D, Ajayi T R, Afolabi O and Omotoso E J 2009 Delineation of salt water intrusion into the fresh water aquifer of Lekki Peninsula, Lagos, Nigeria *Environmental Geology* **56** 927
- [18] ABEM Instrument AB 2006 Equipment Manual for ABEM Terrameter SAS 1000/4000